
### LOS OLIVOS COMMUNITY SERVICES DISTRICT SEPTIC TO SEWER PROJECT 30% SUBMITTAL

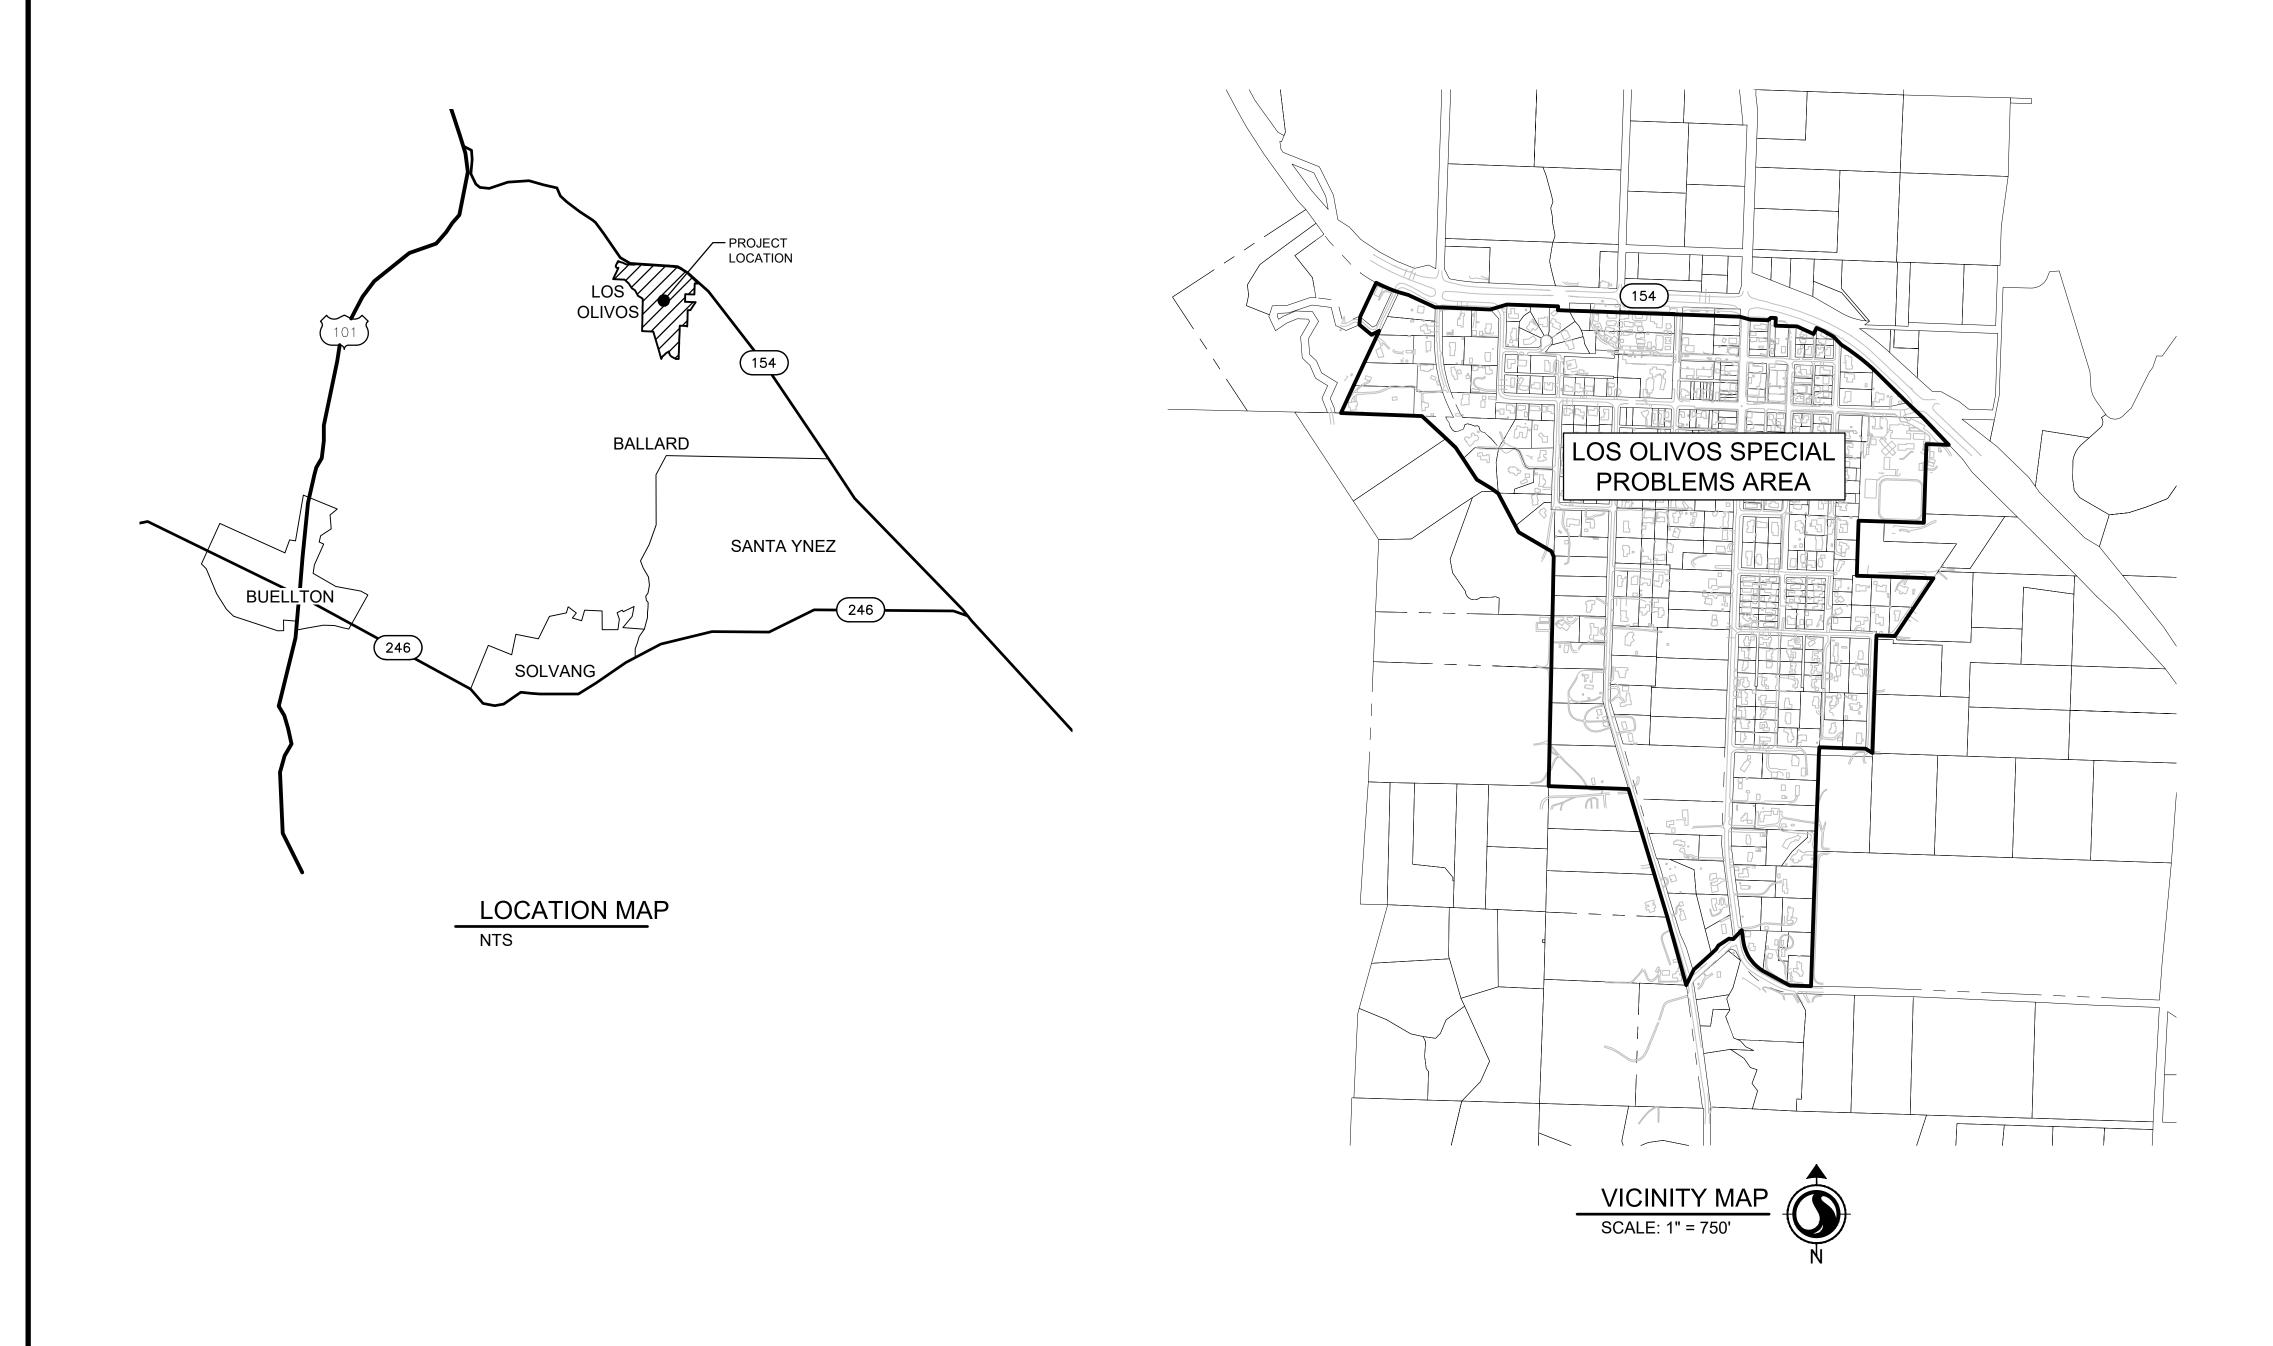

30% SUBMITTAL

			DESIG
			DRAFT
			CHECK
0 Z	DATE	REVISIONS	DATE:

TZ WARNING

0 ½ 1

1 IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


PRELIMINITE V-NO.N.
PRELIMINITE Y-NO.N.
FOR COSHEET


PROJECT NO.


184031368


DWG NO. G1


SHT. 1 OF 54

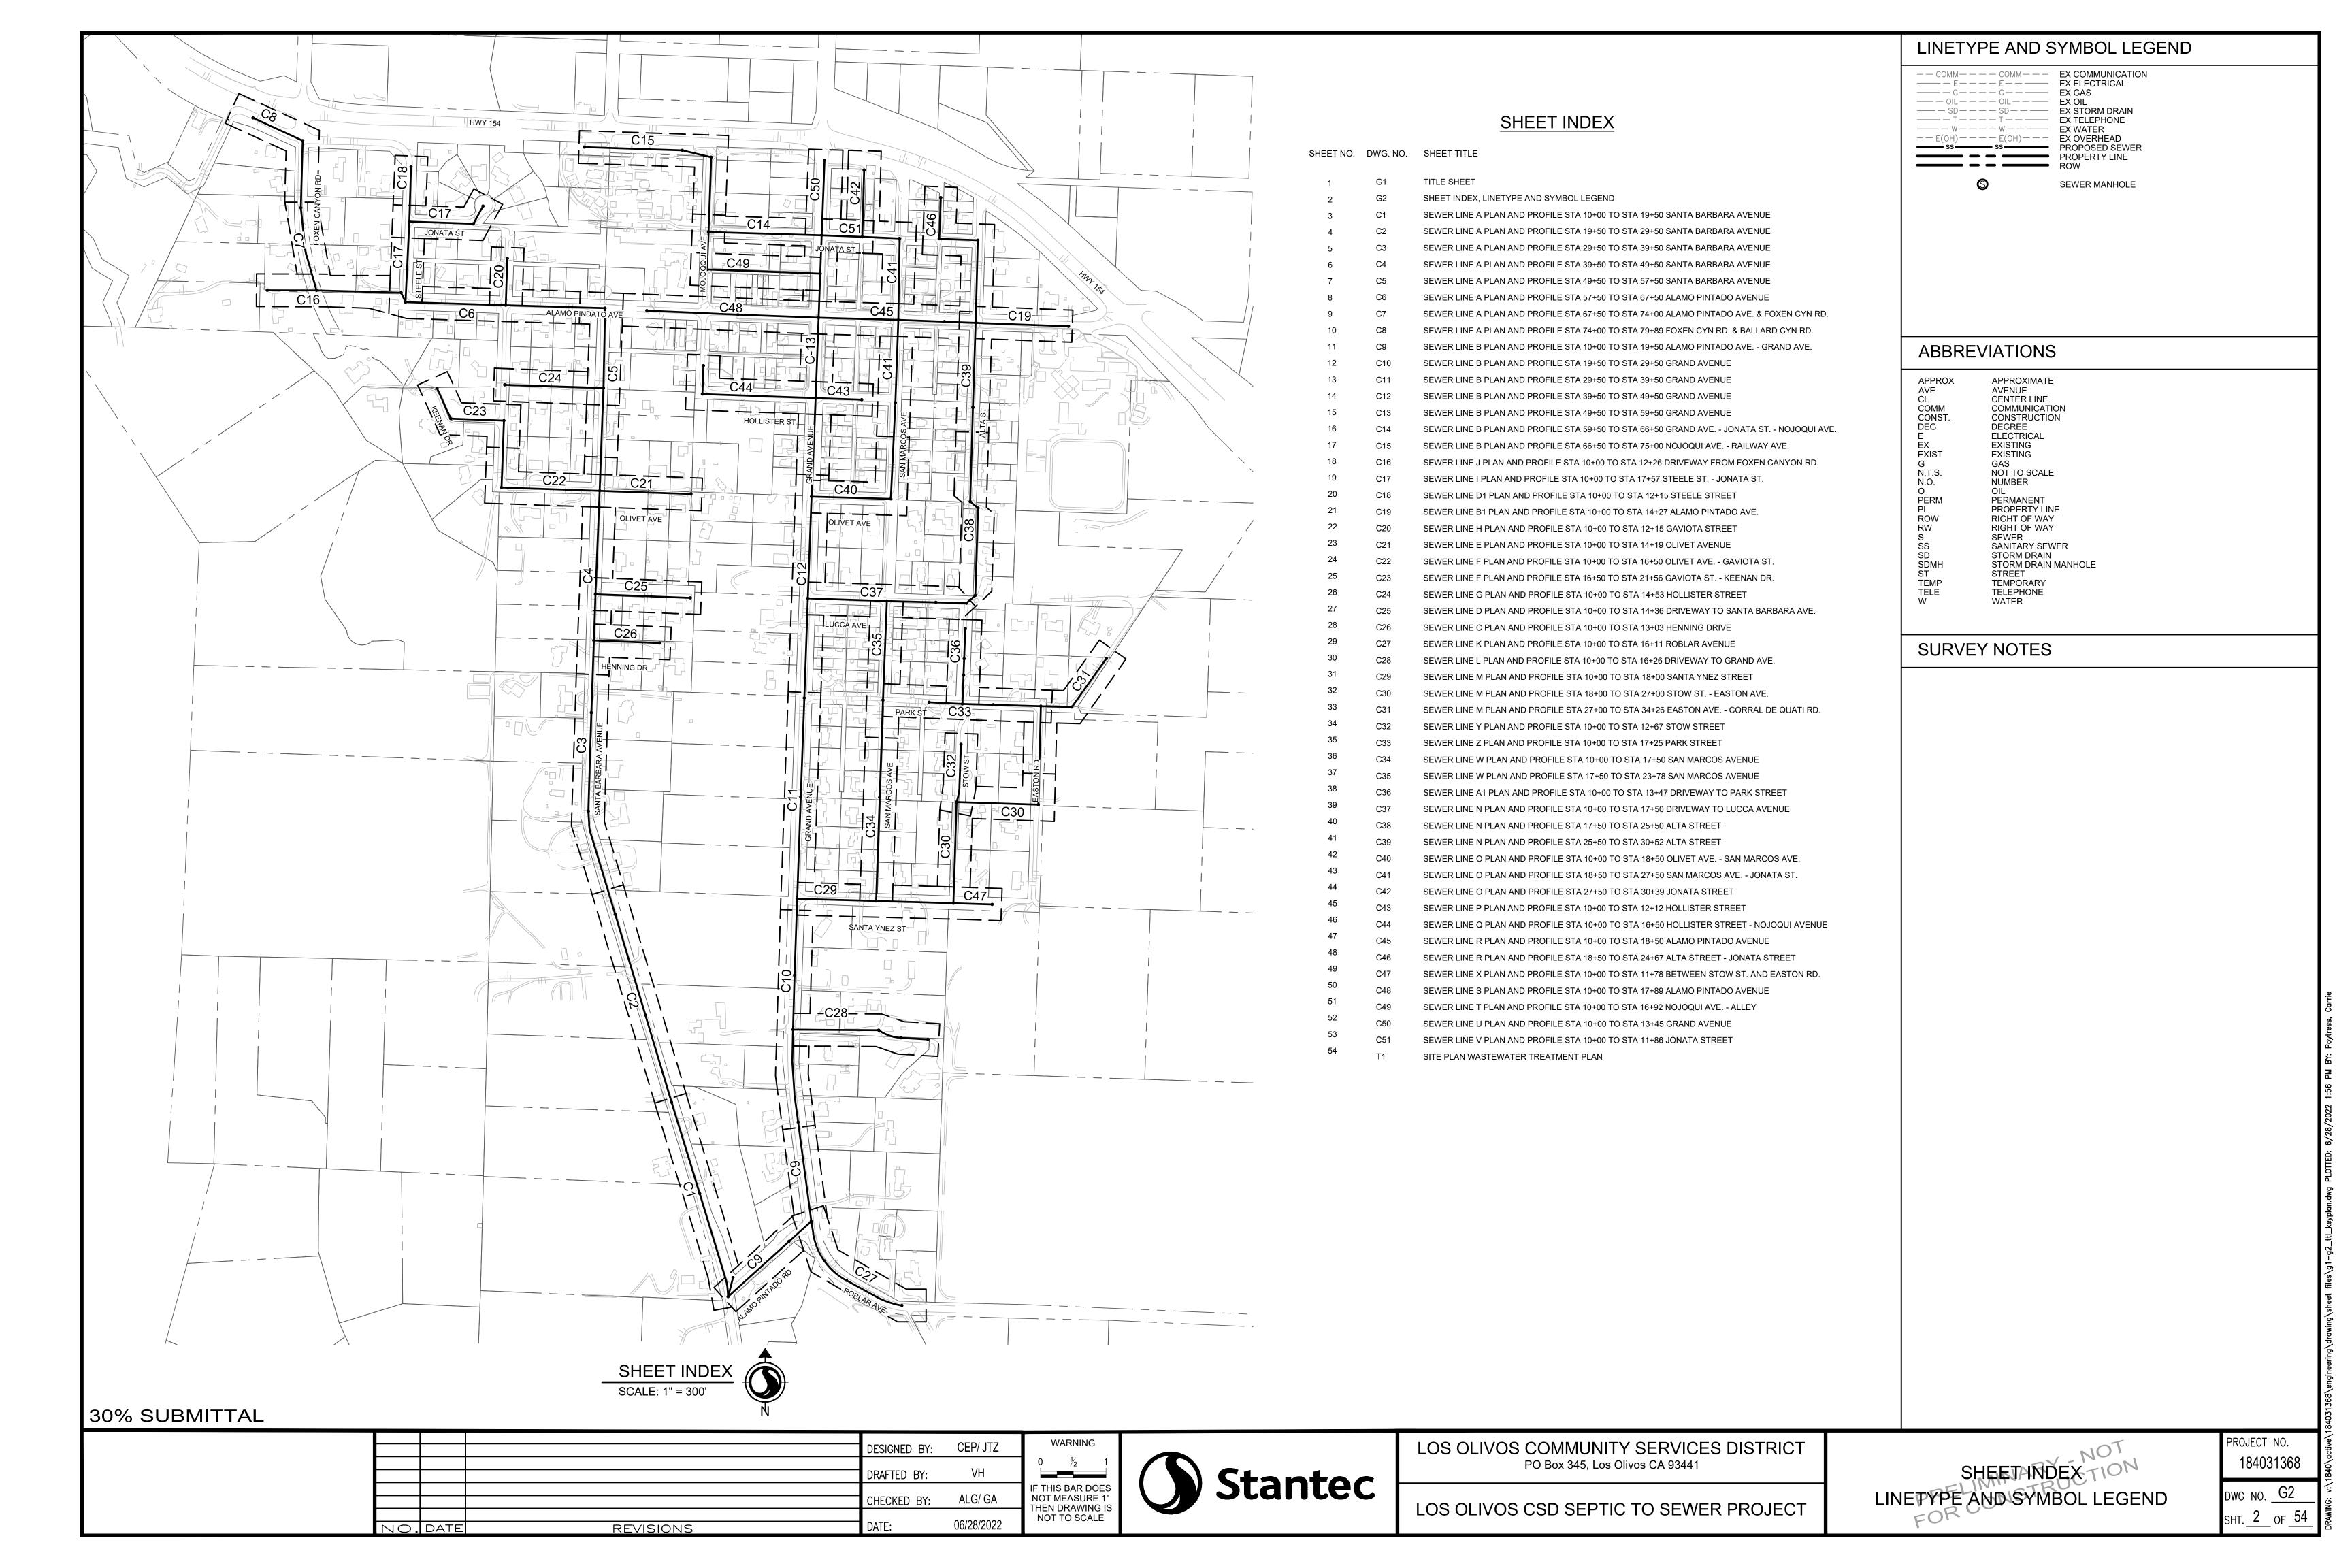


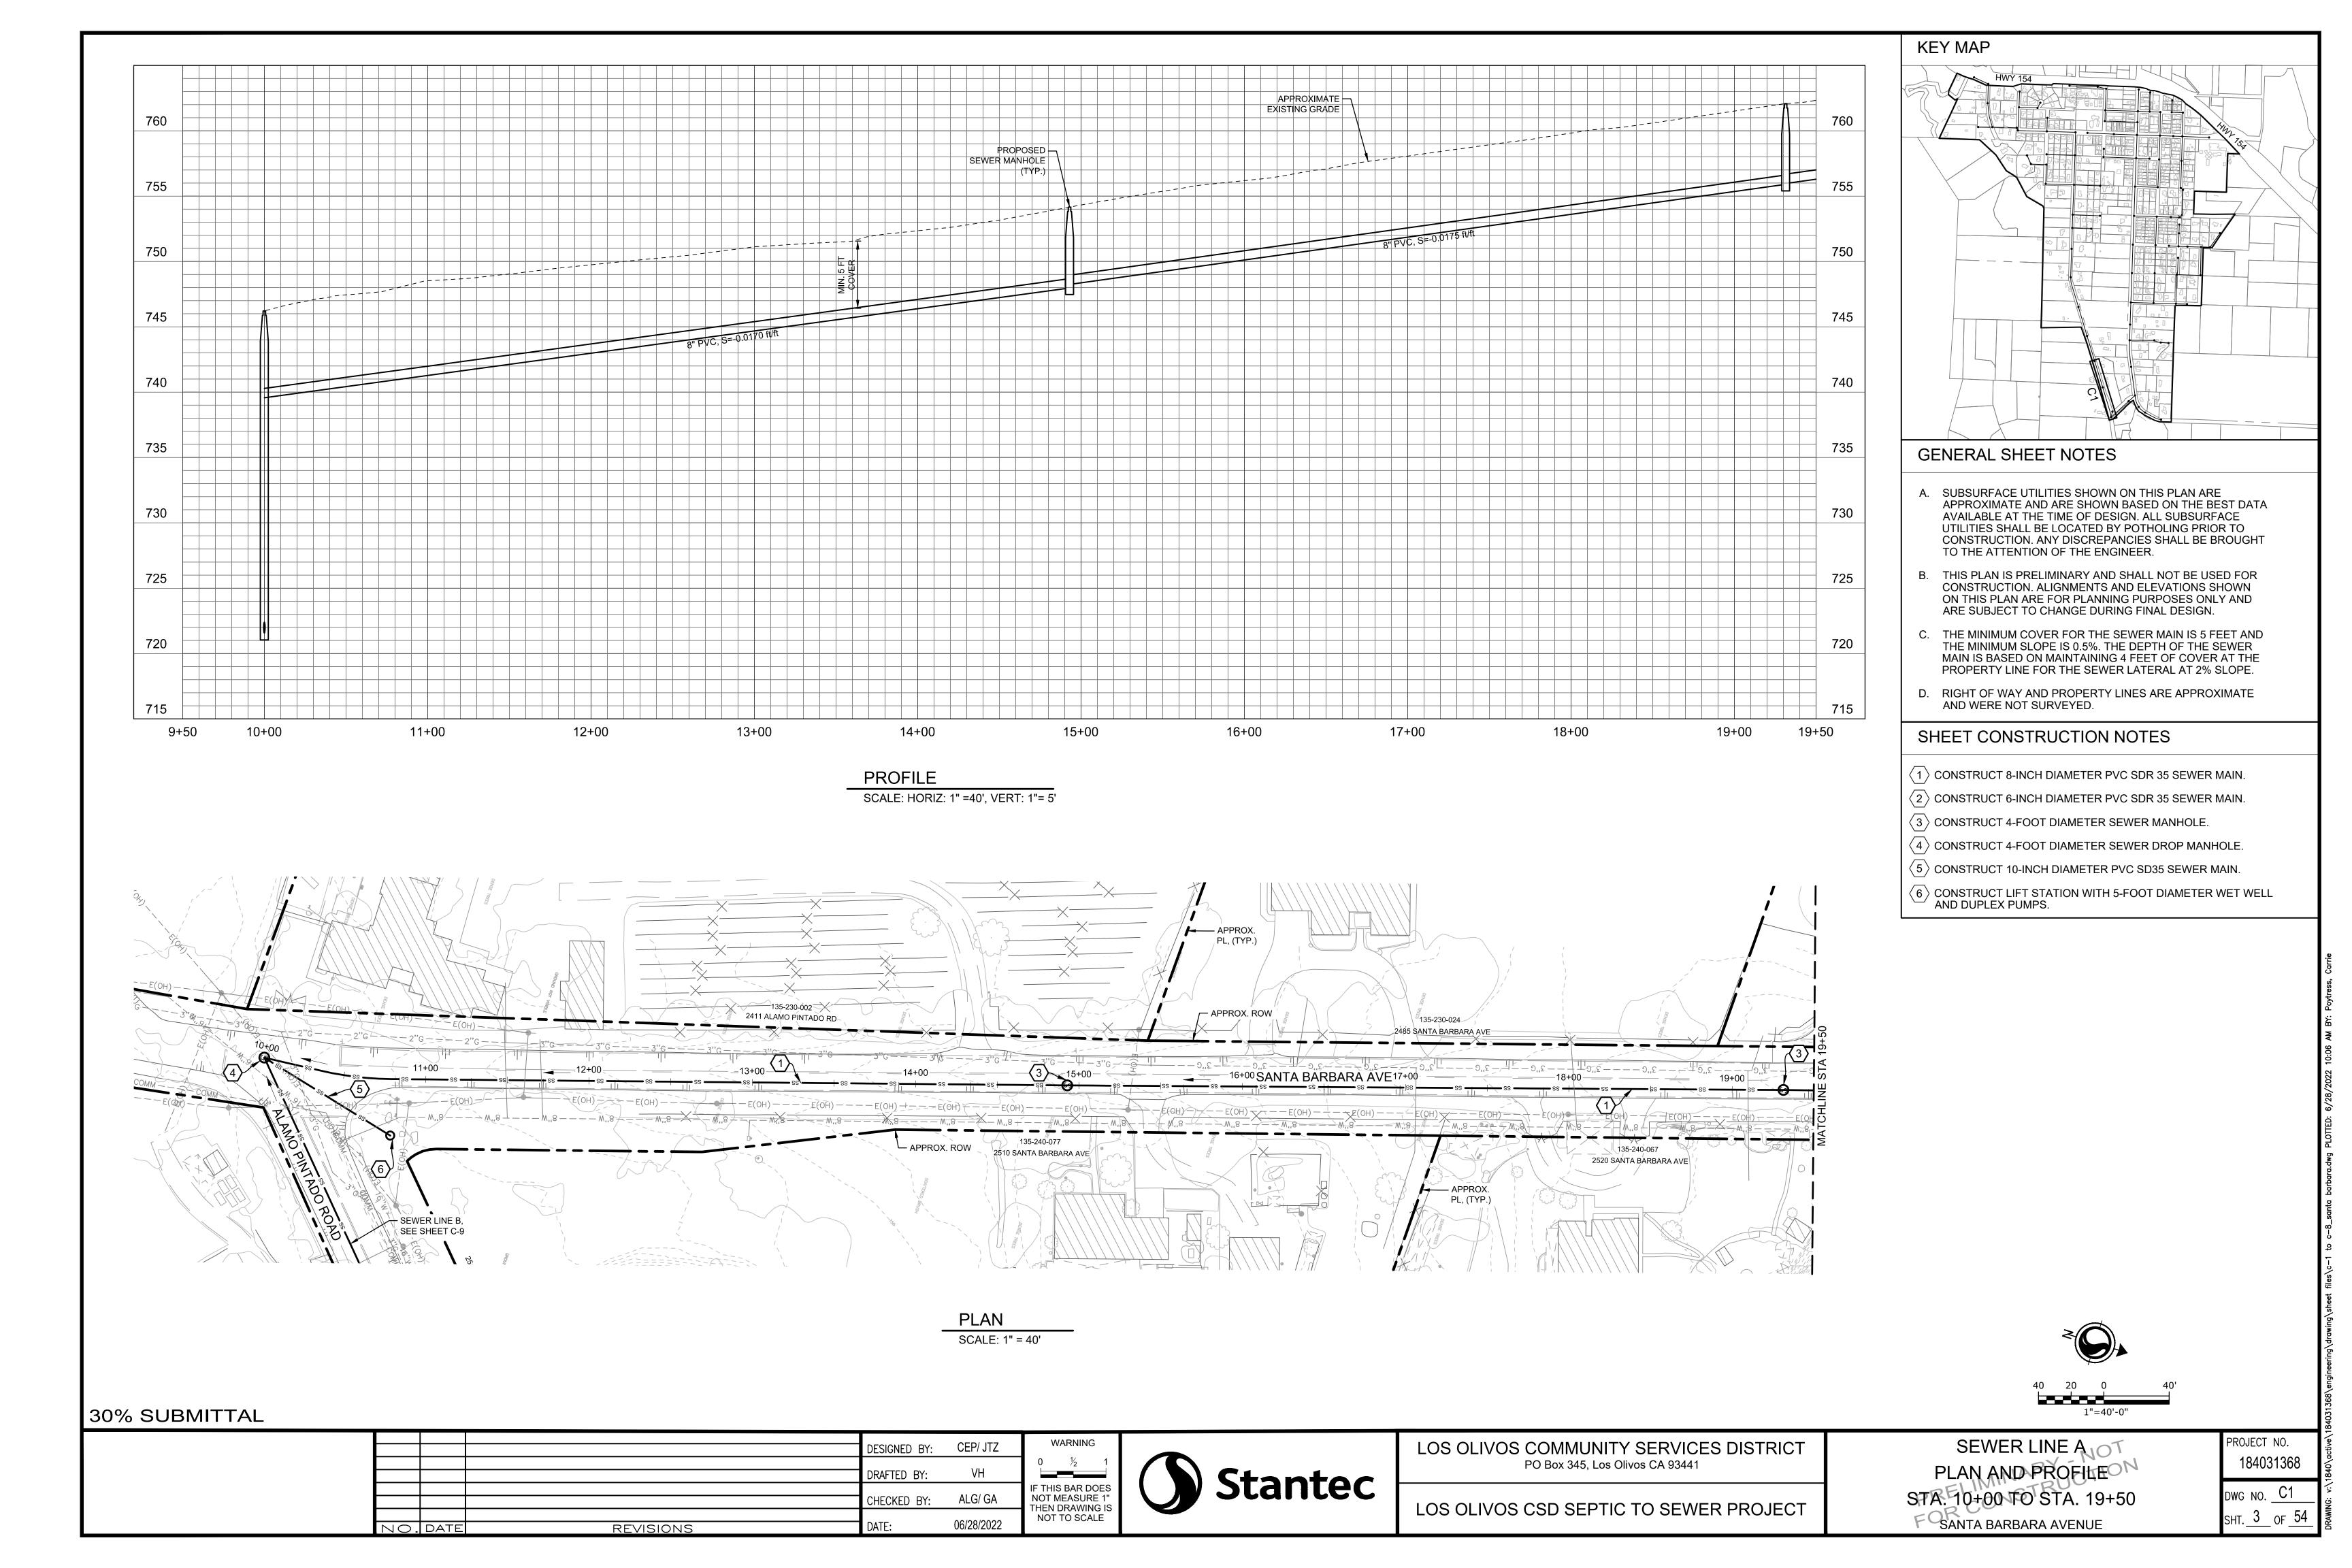

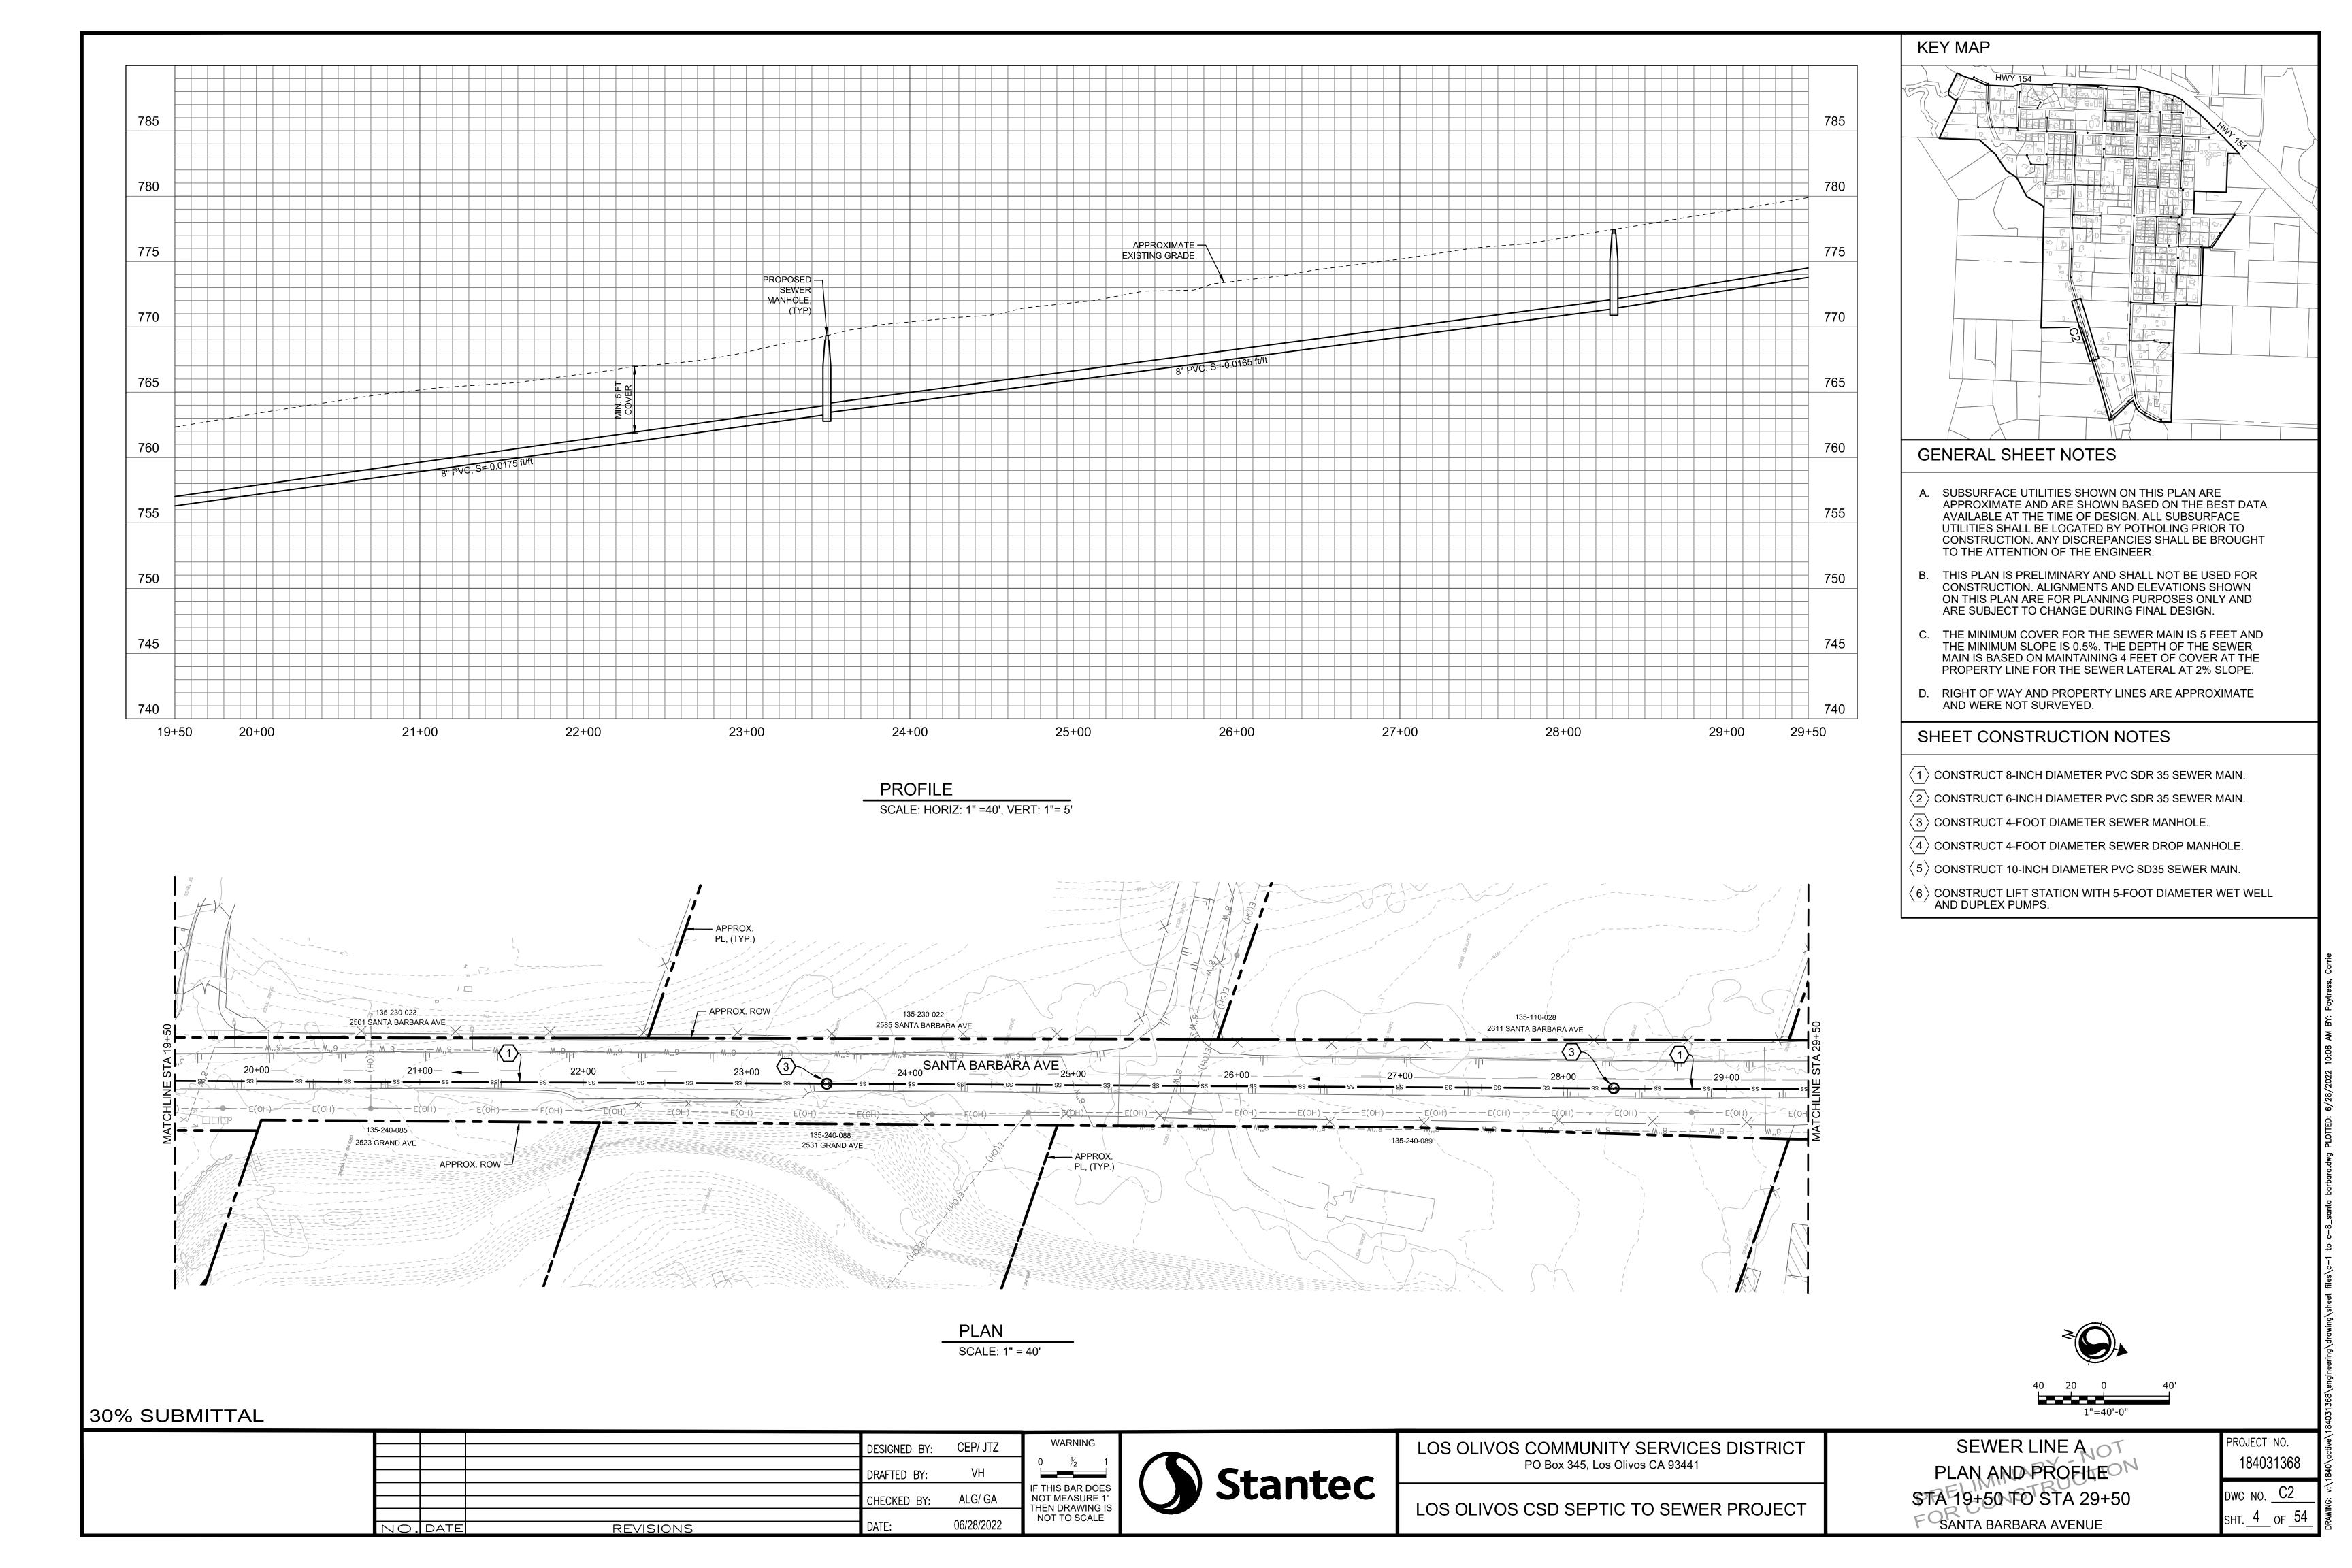


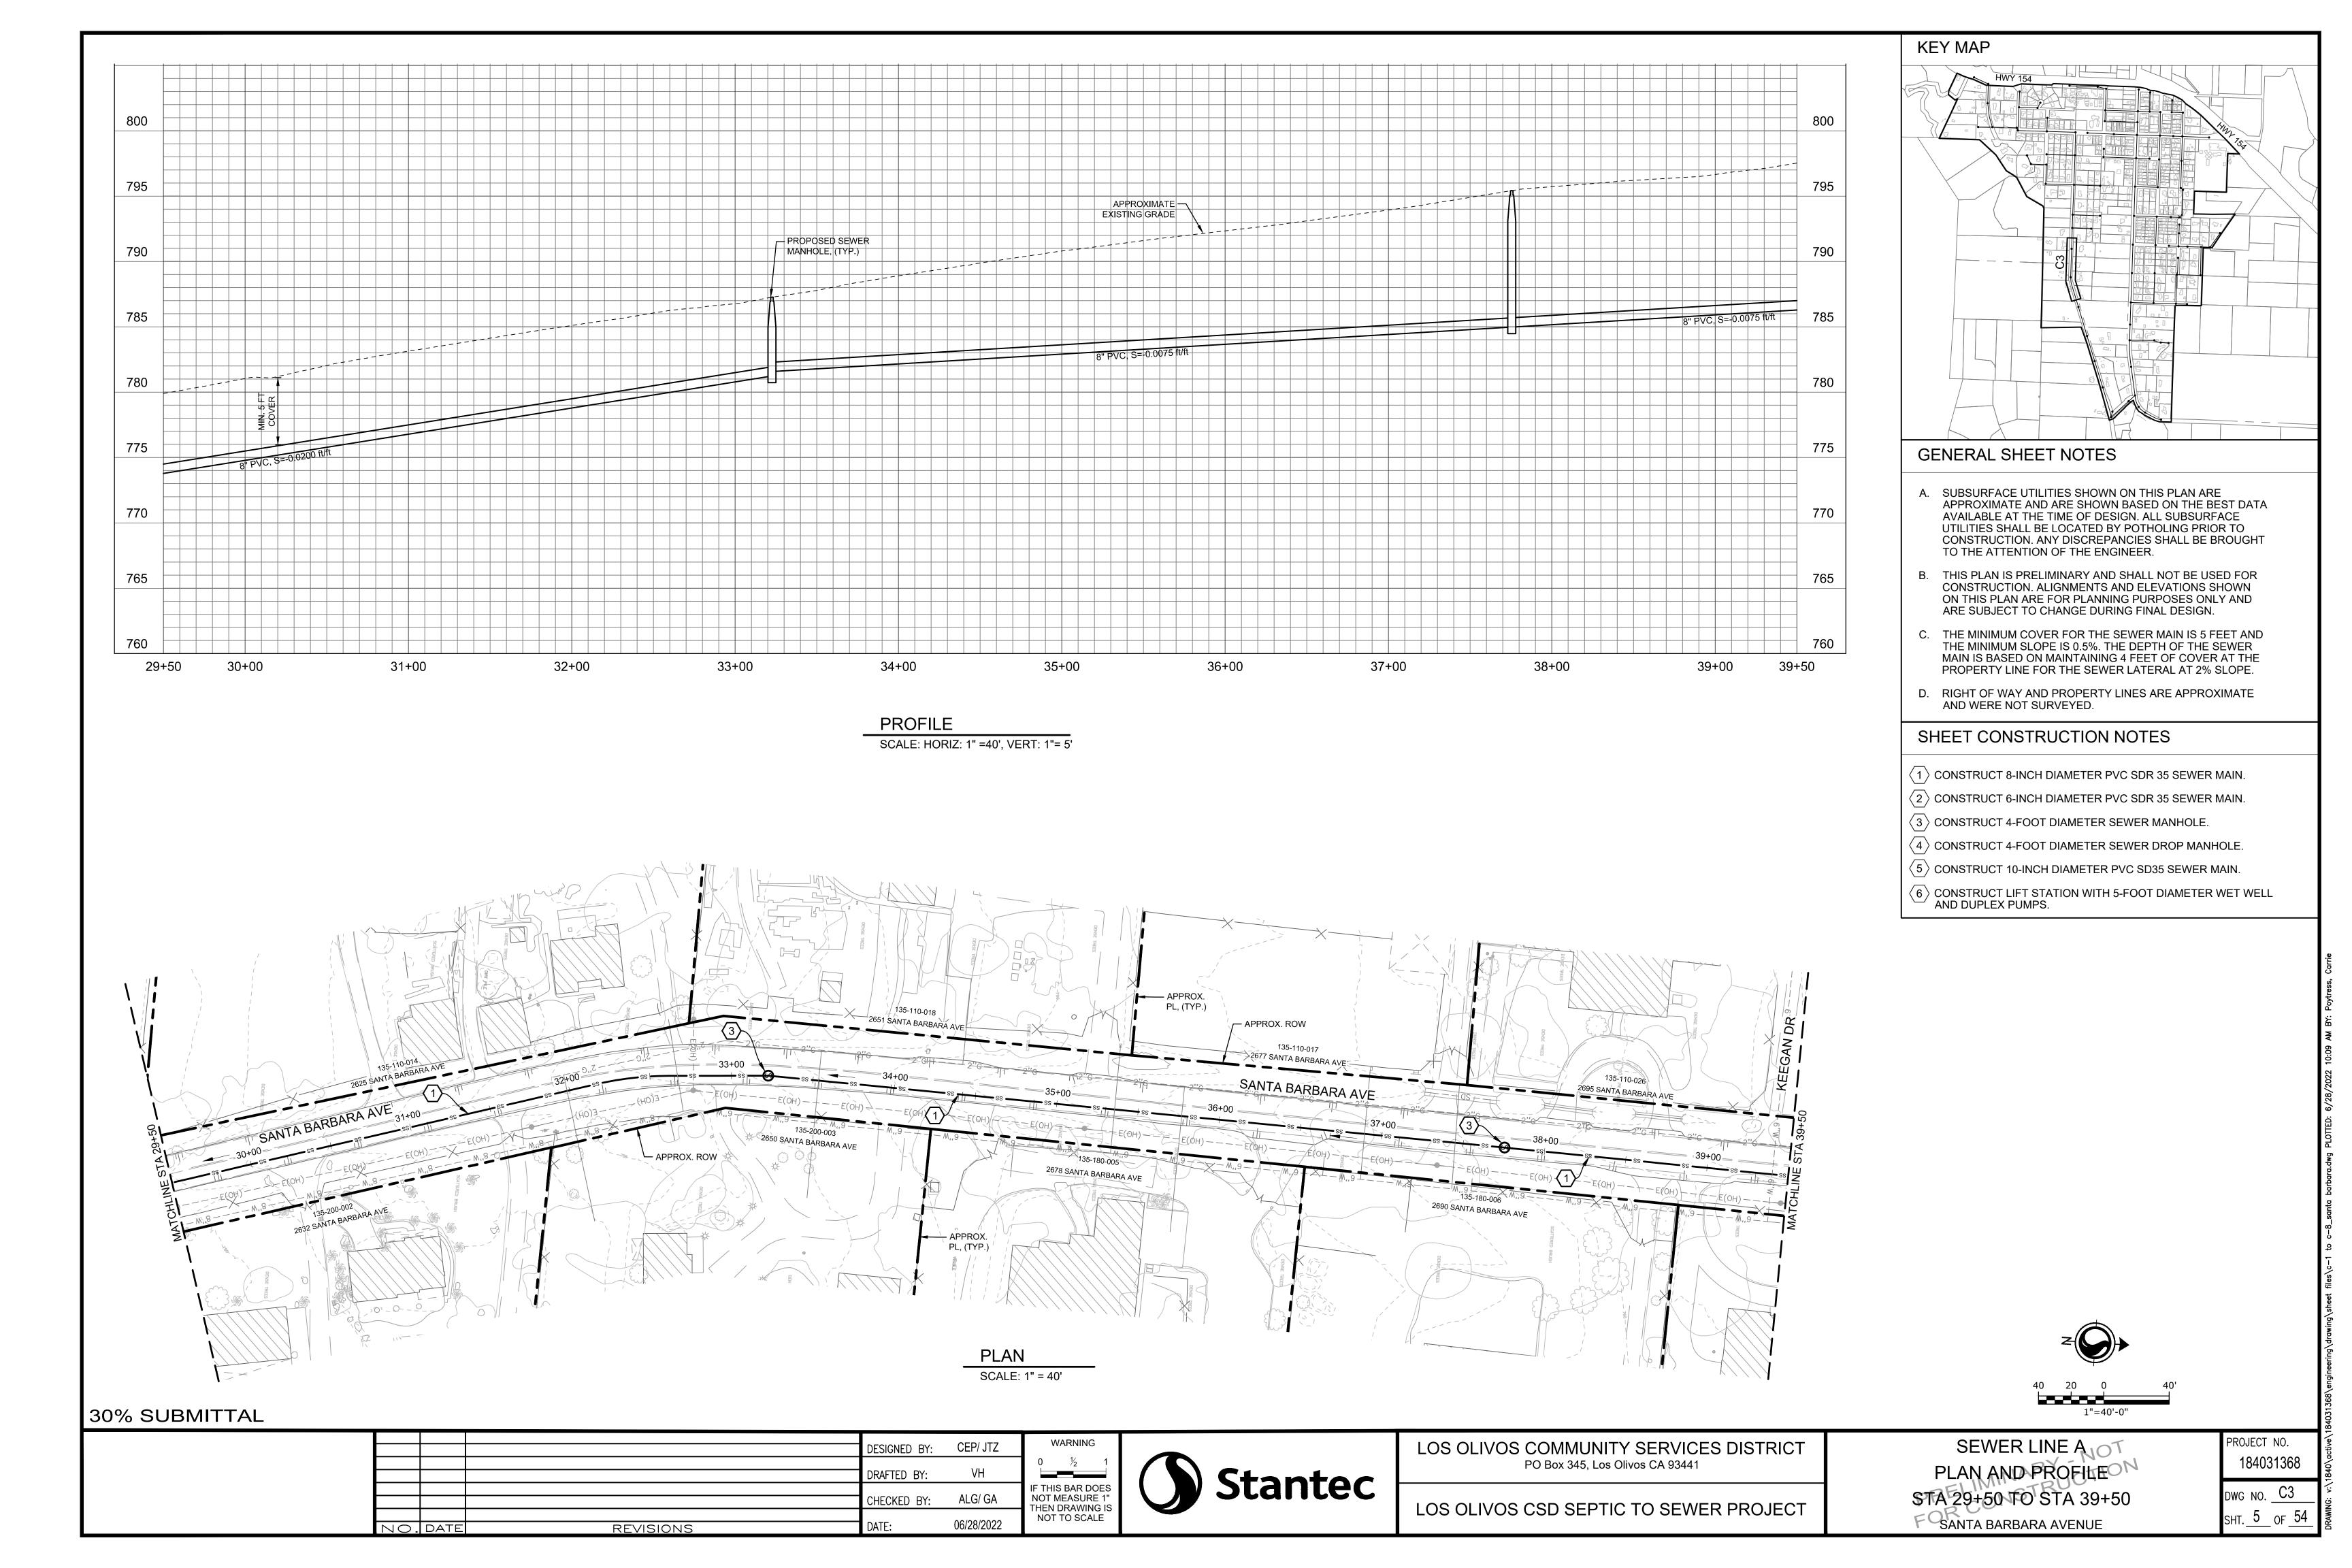


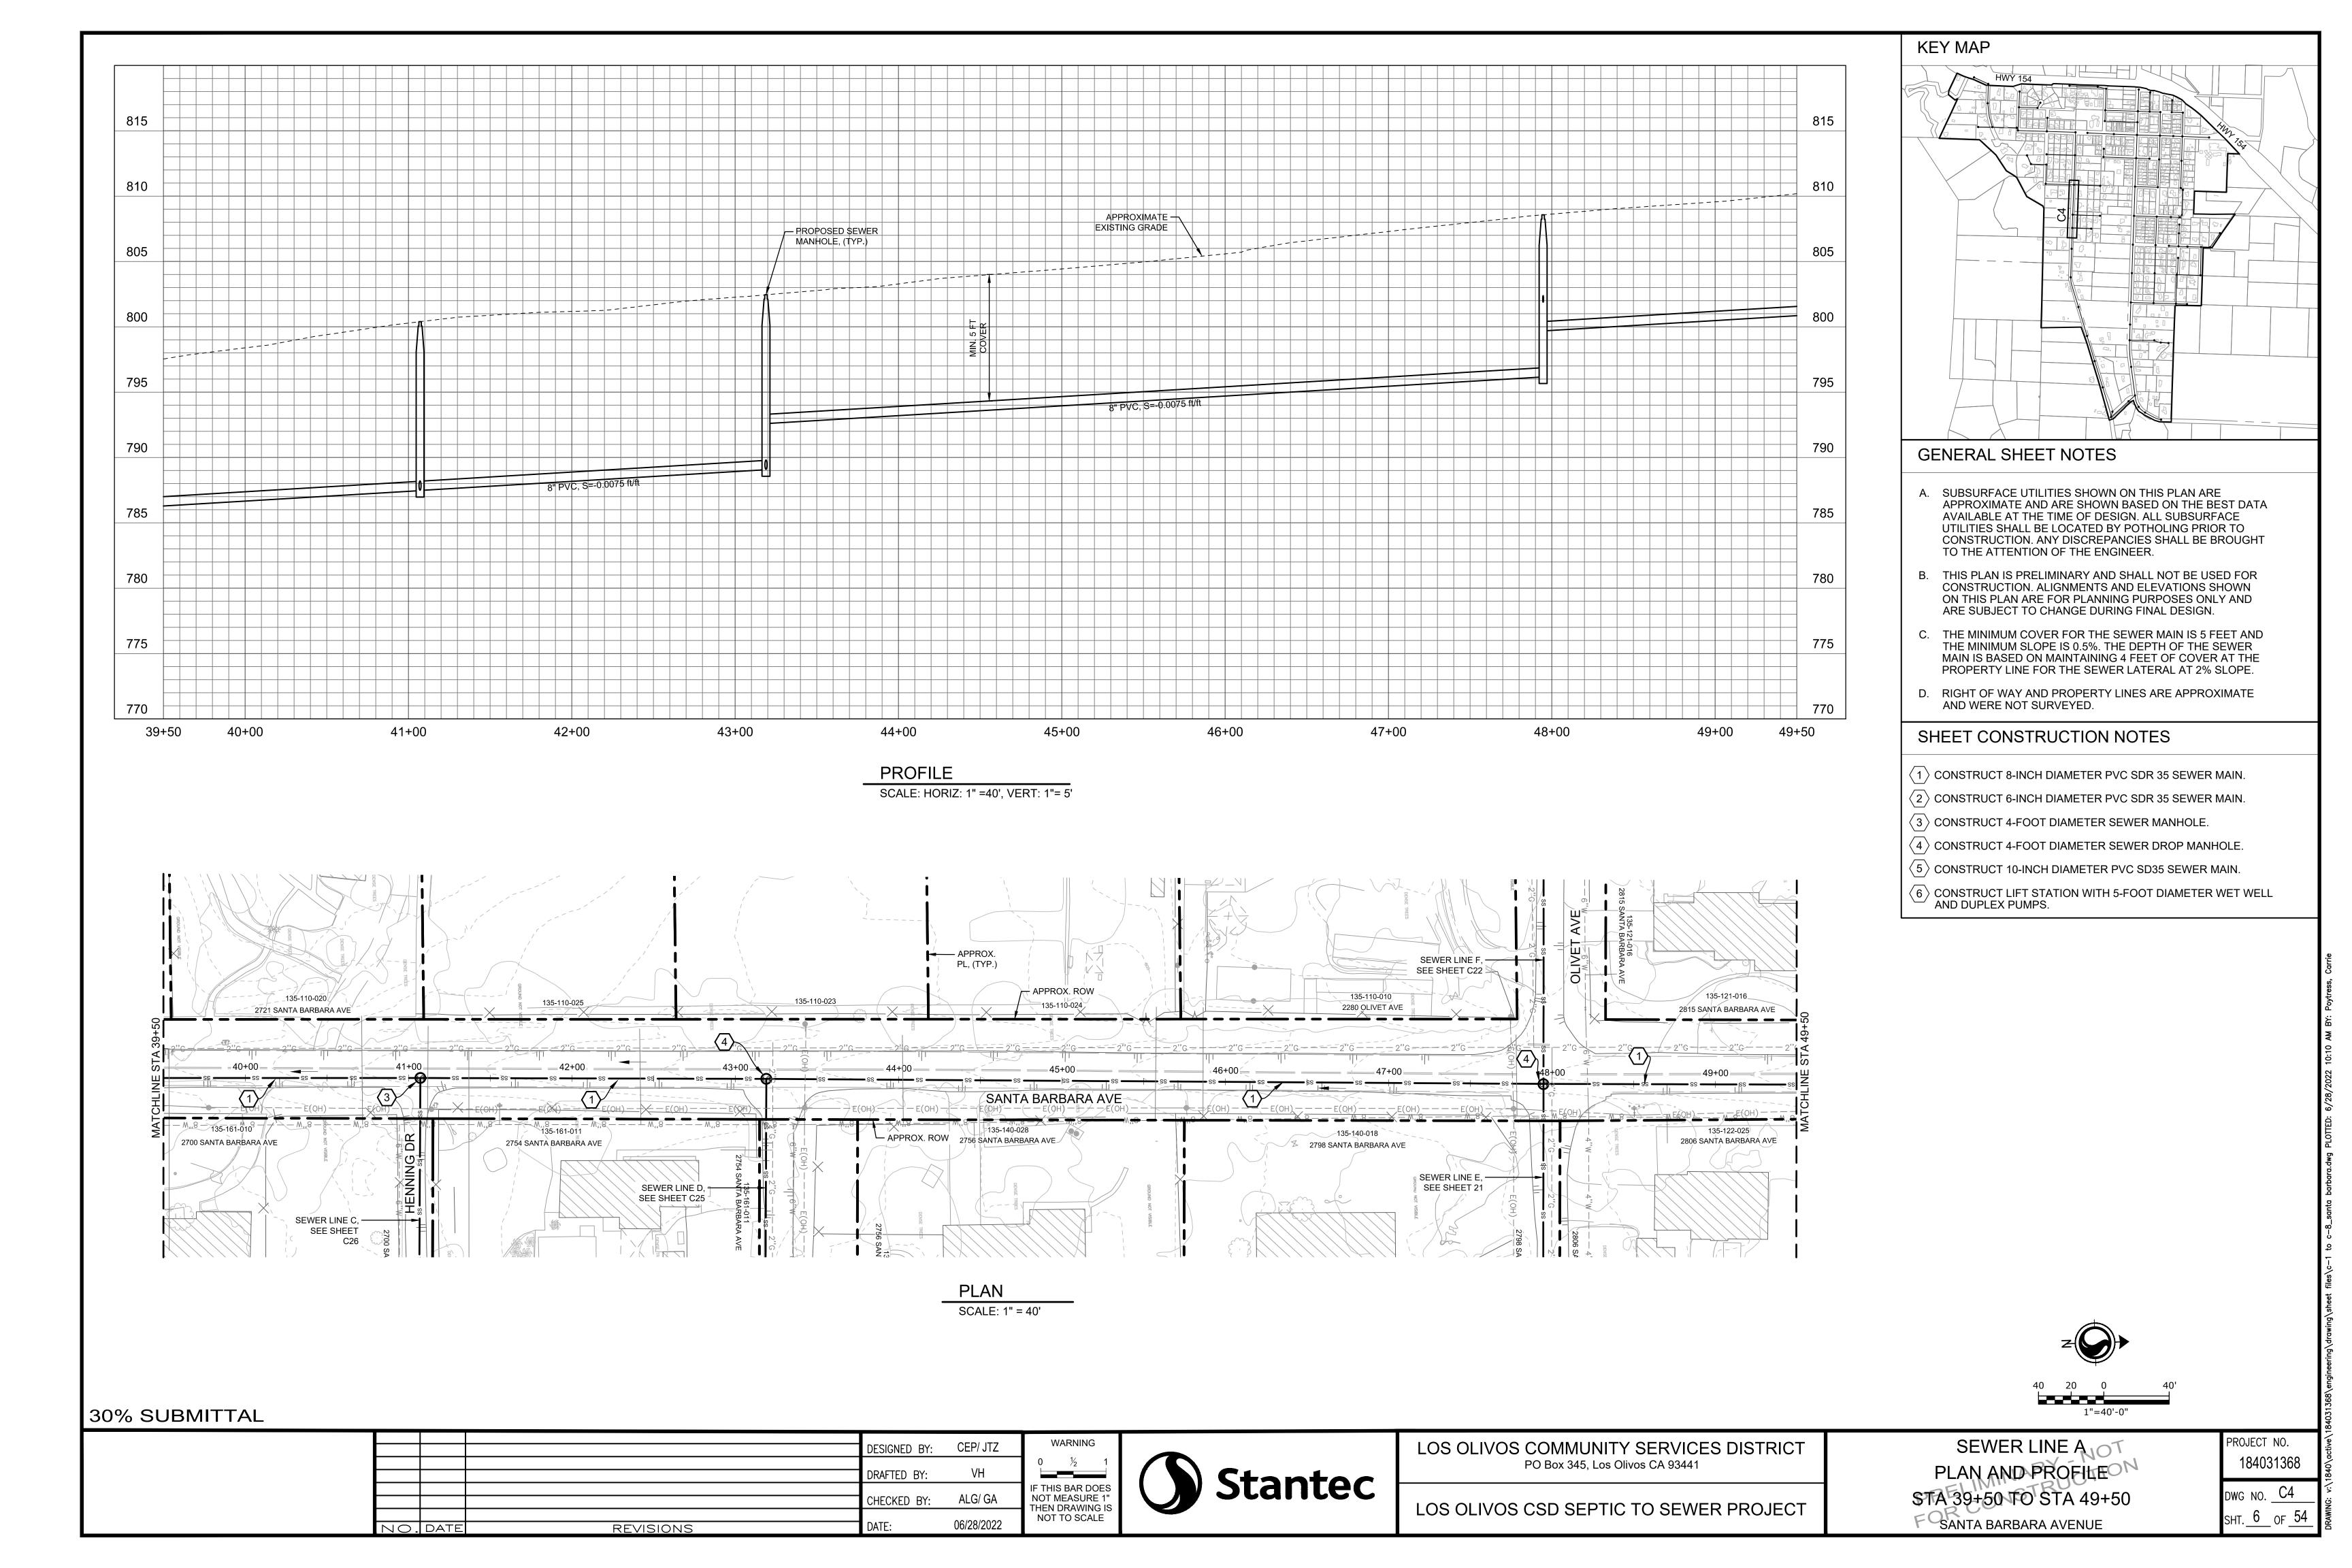

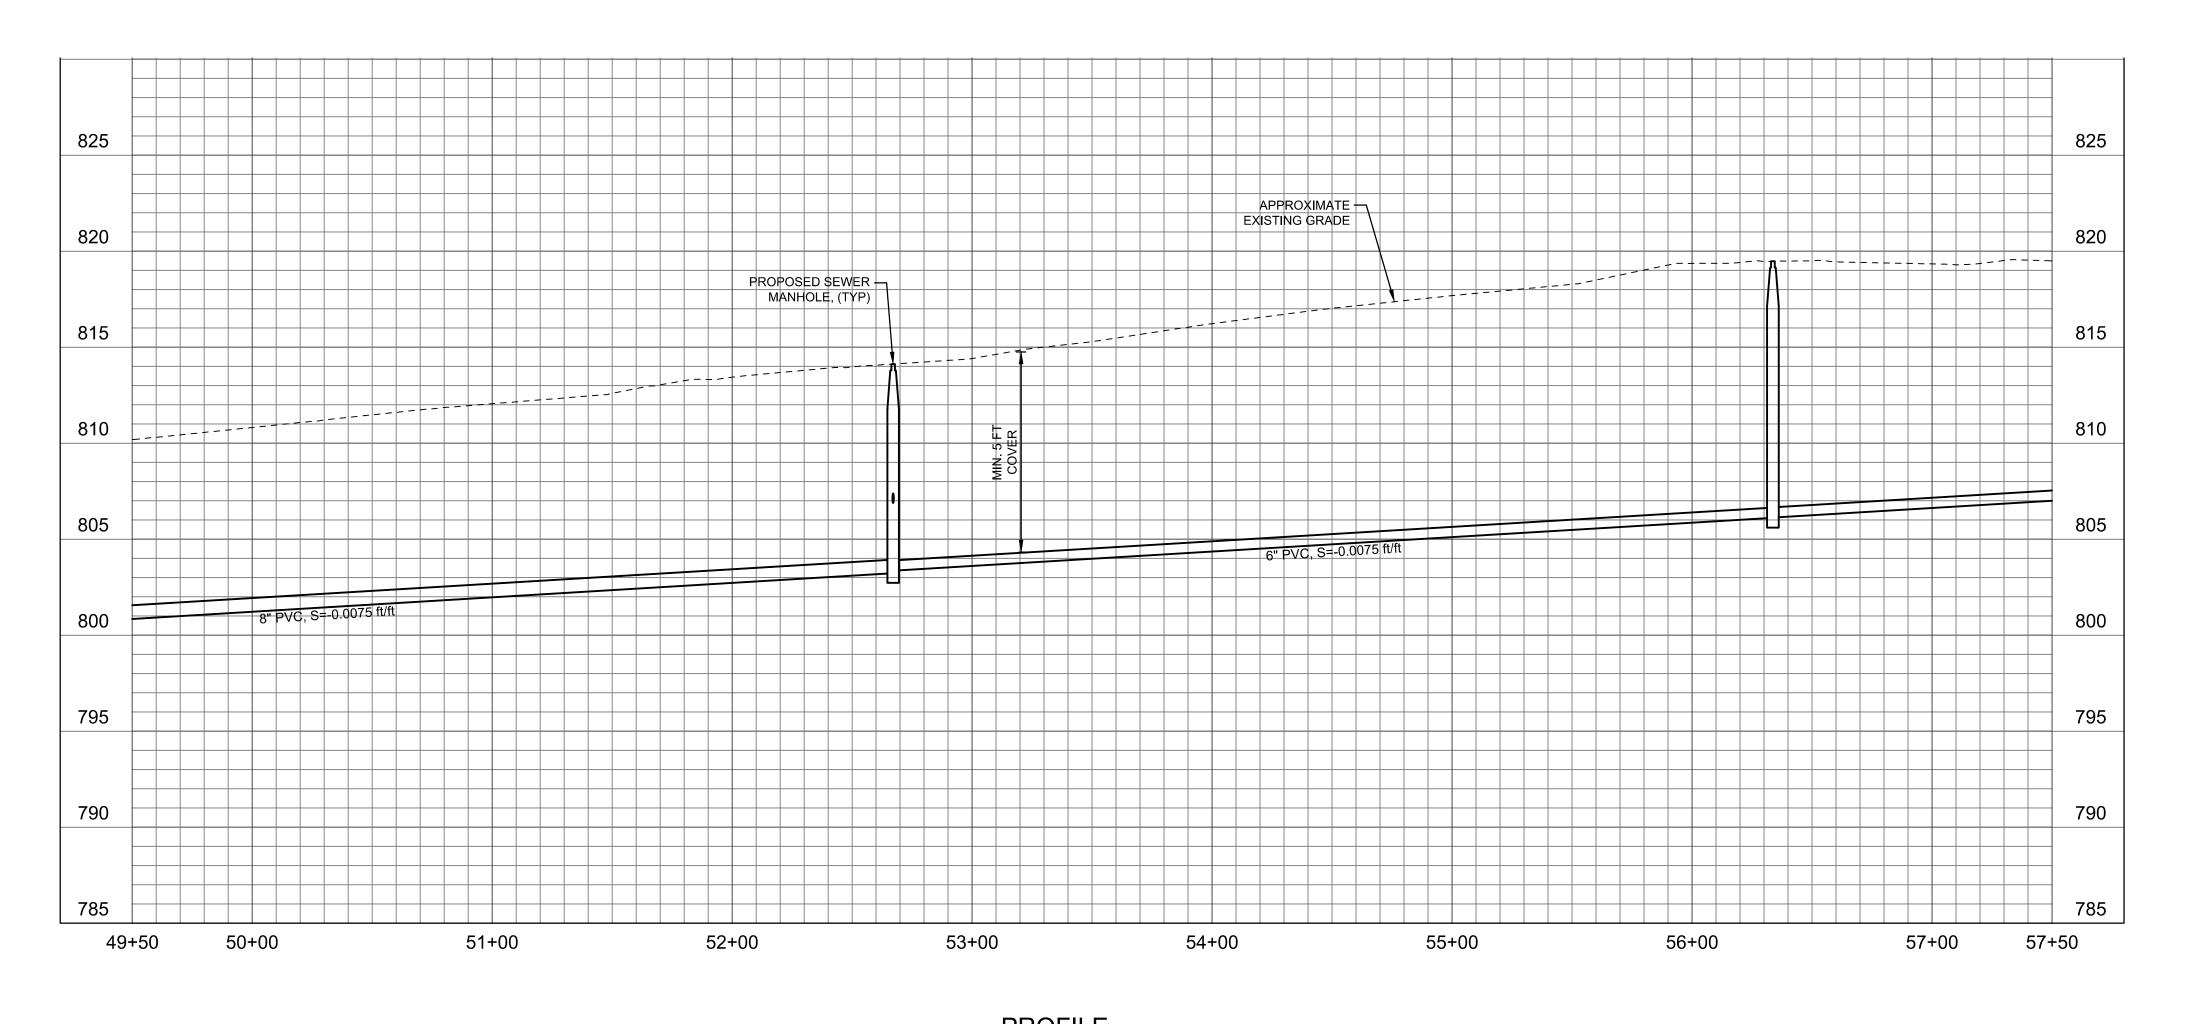

SCALE: HORIZ: 1" =40', VERT: 1"= 5'

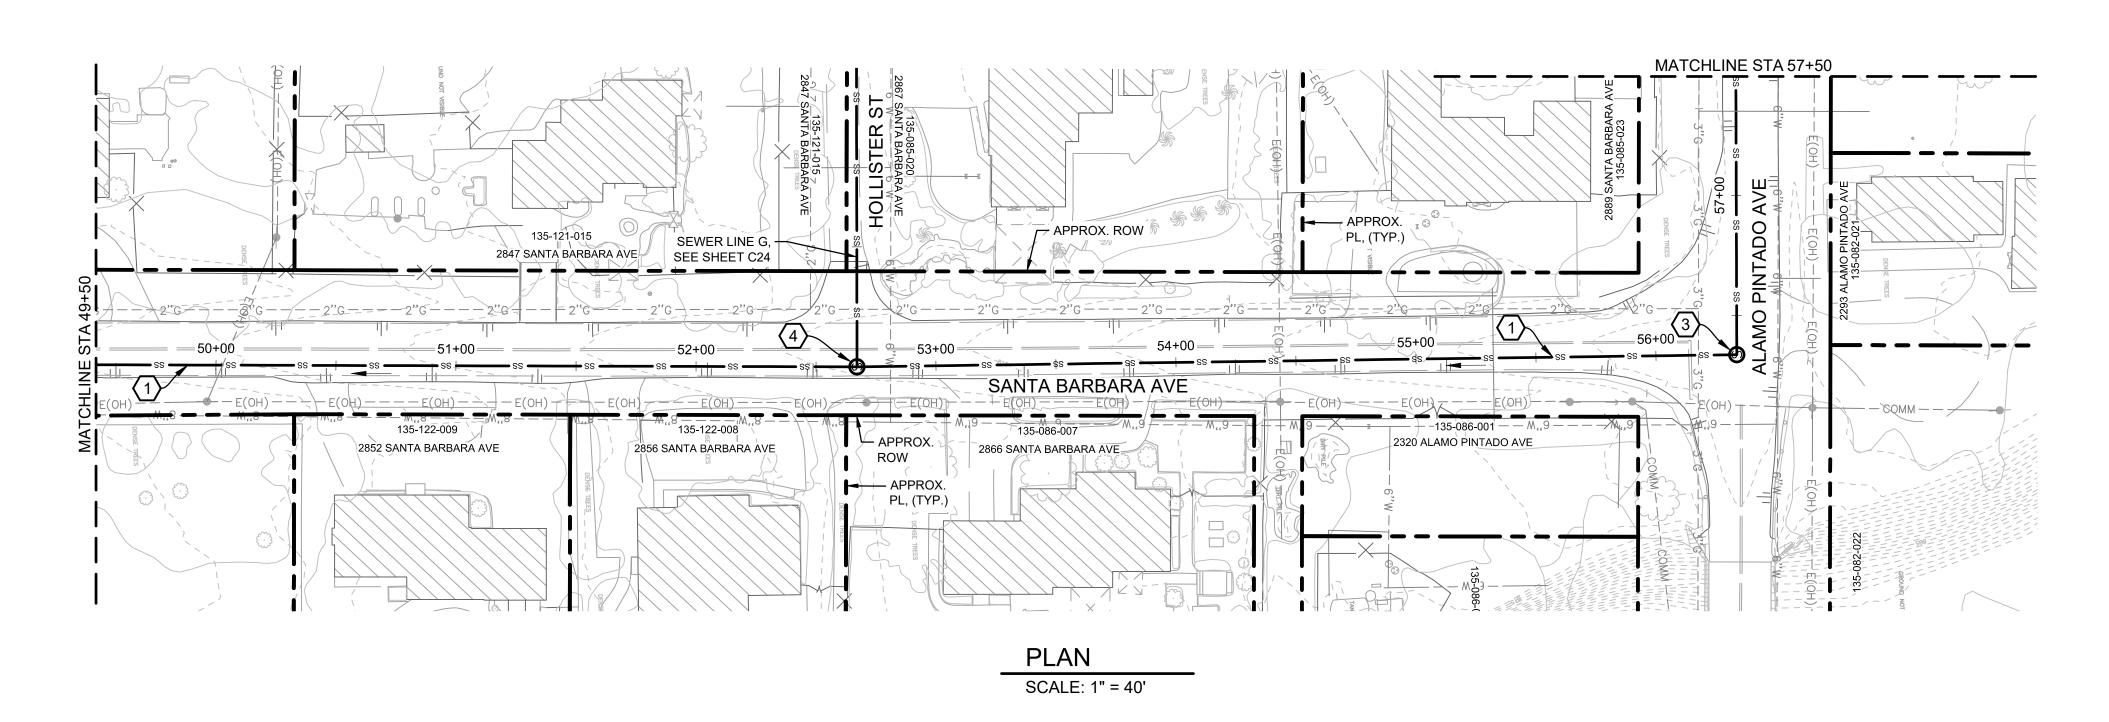

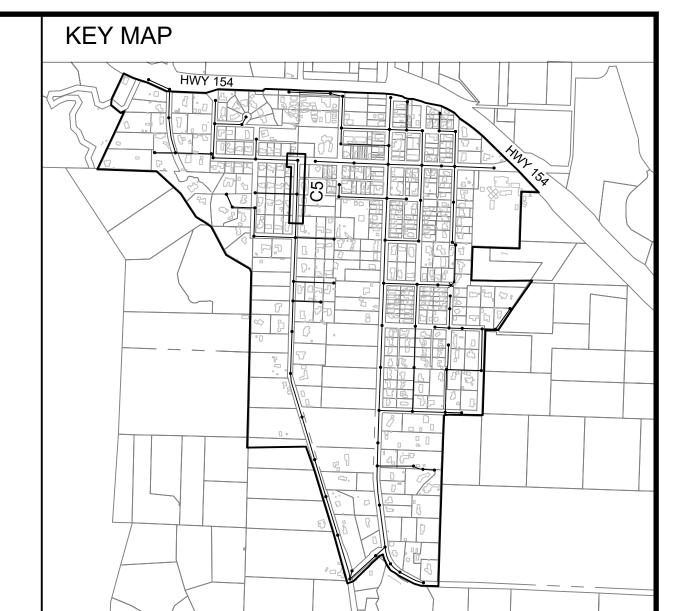


### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- (1) CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 2 CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 3 CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\overline{\left\langle 5\right\rangle }$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
ΖΟ.	DATE	REVISIONS	DATE:	06/28/2022




LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE A
PLAN AND PROFILE
STA 49+50 TO STA 57+50
SANTA BARBARA AVENUE

PROJECT NO. 184031368

DWG NO. <u>C5</u> SHT. <u>7</u> OF <u>54</u>

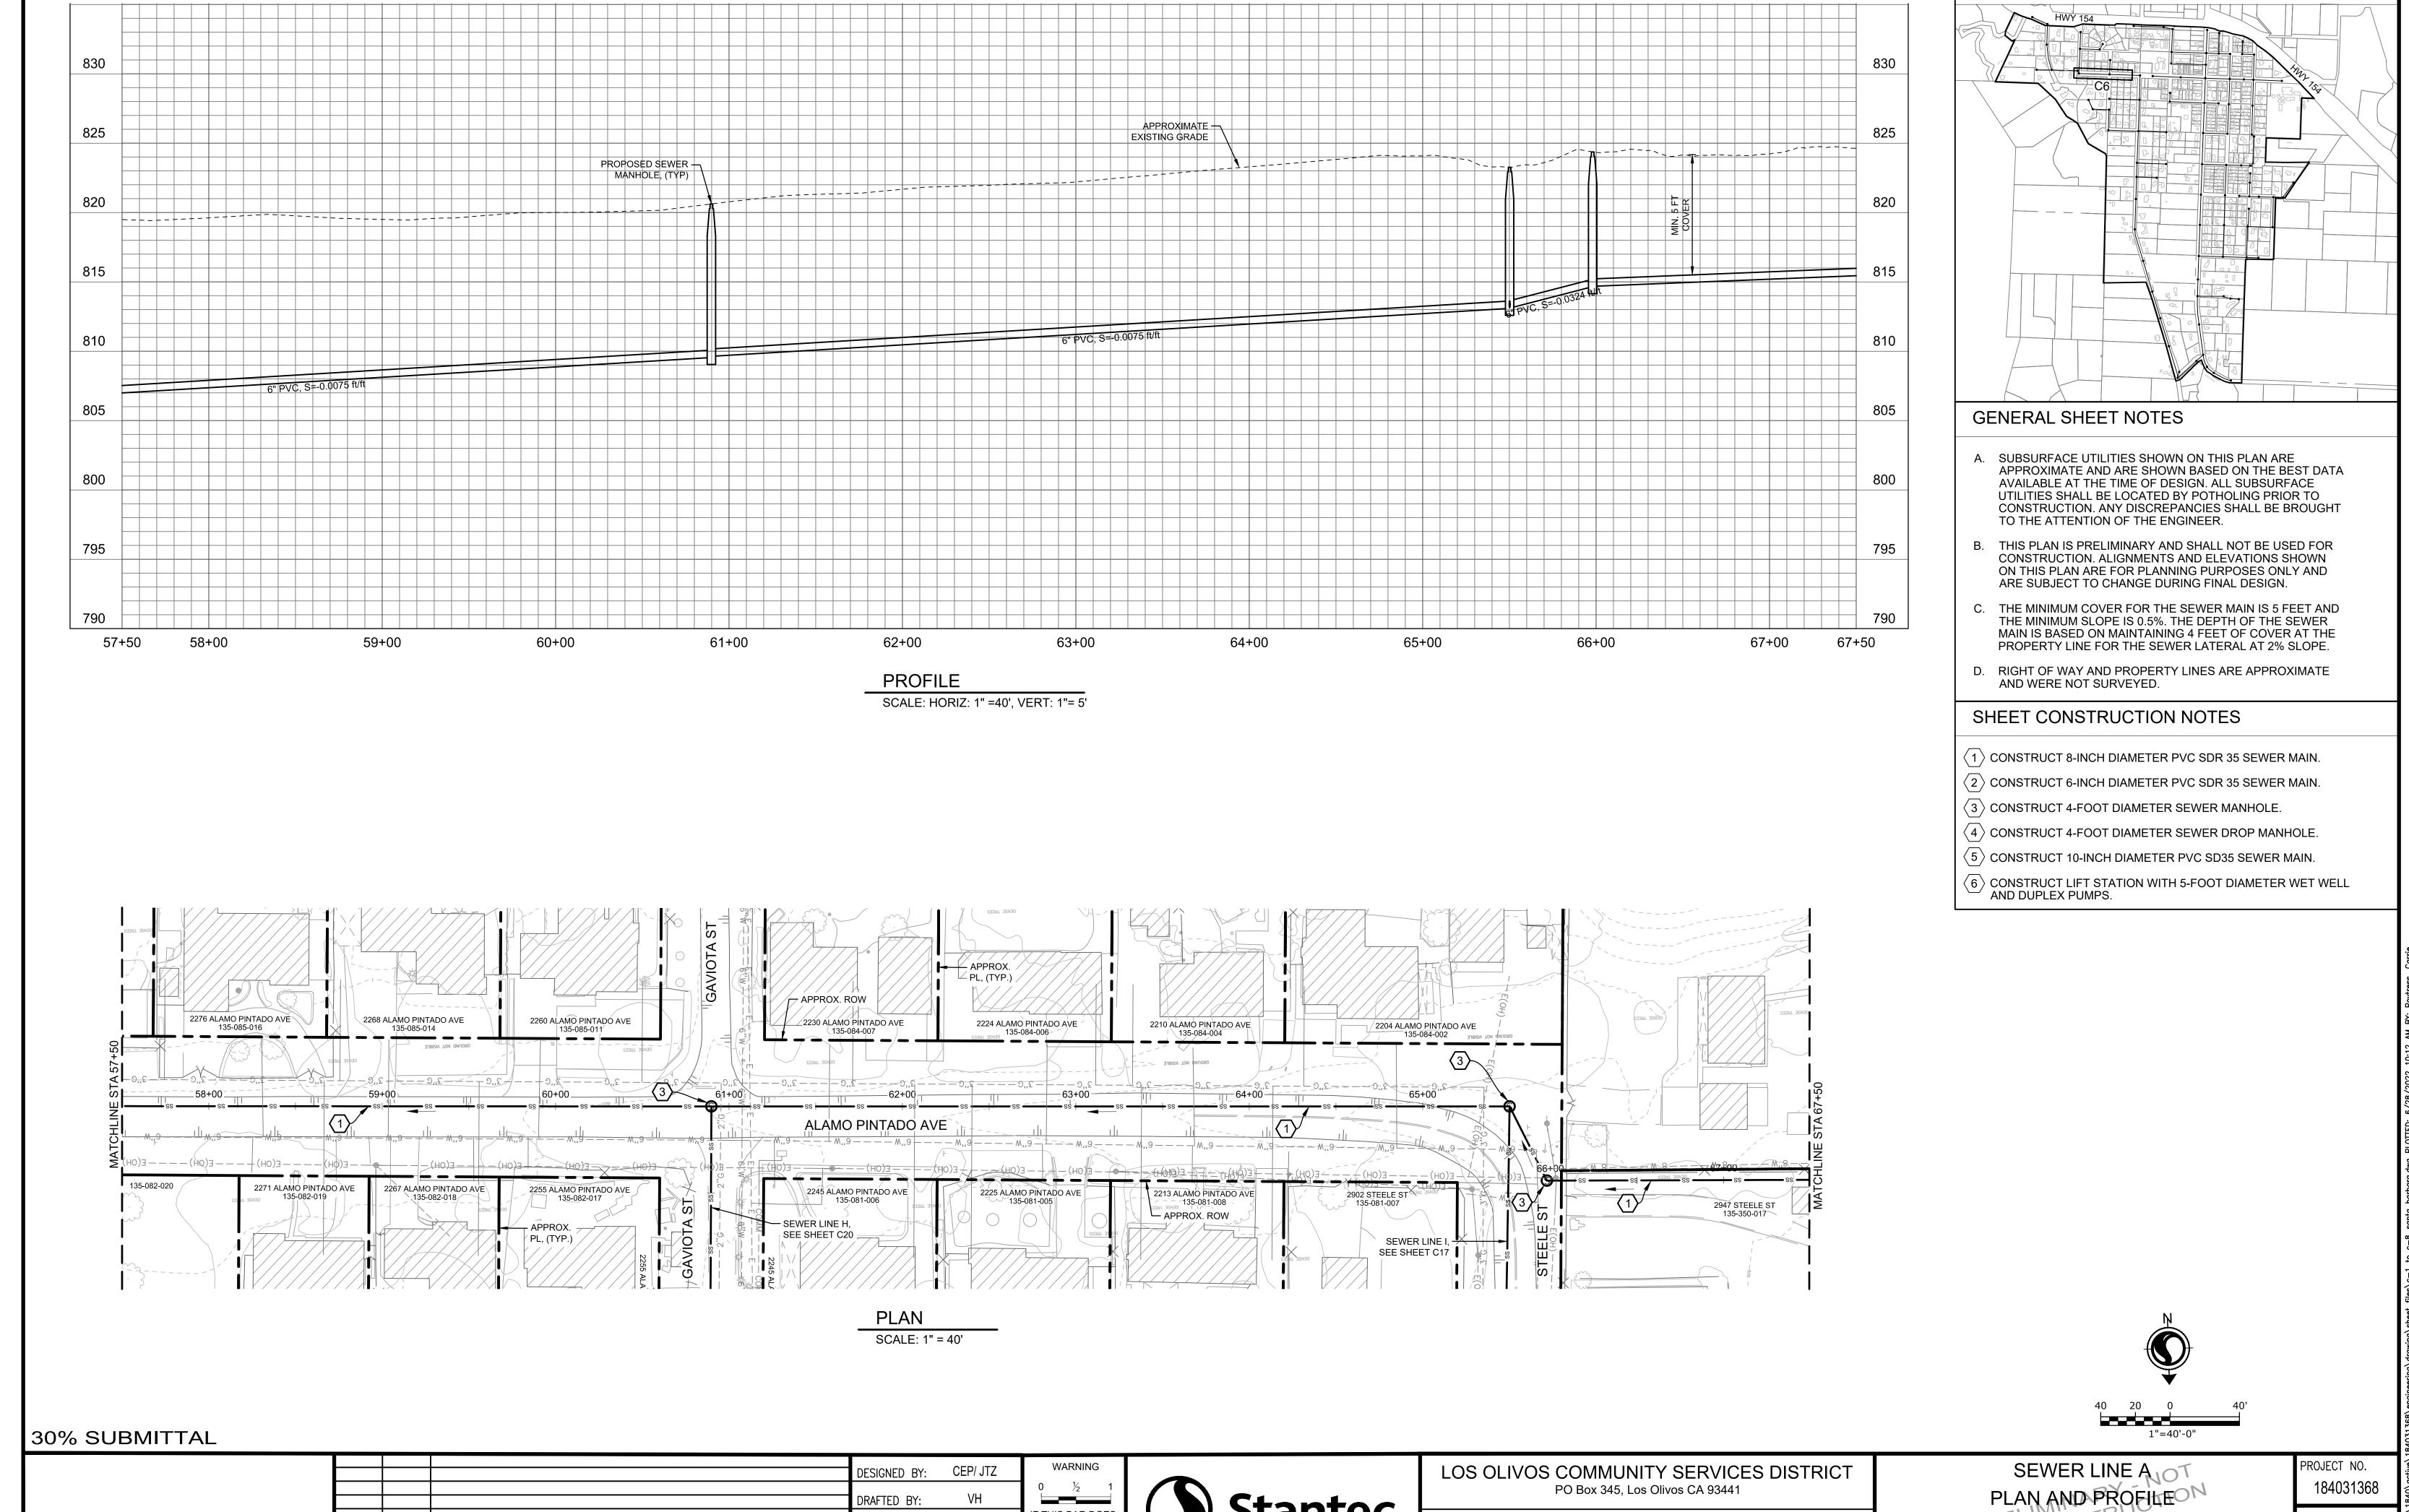

Stantec

PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

CEP/ JTZ

06/28/2022

IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS

NOT TO SCALE

DESIGNED BY:

DRAFTED BY:

CHECKED BY:

REVISIONS

NO. DATE


PROJECT NO. 184031368 Towg No. C6


SHT. 8 OF 54

STA 57+50 TO STA 67+50

FOALAMO PINTADO AVENUE

**KEY MAP** 

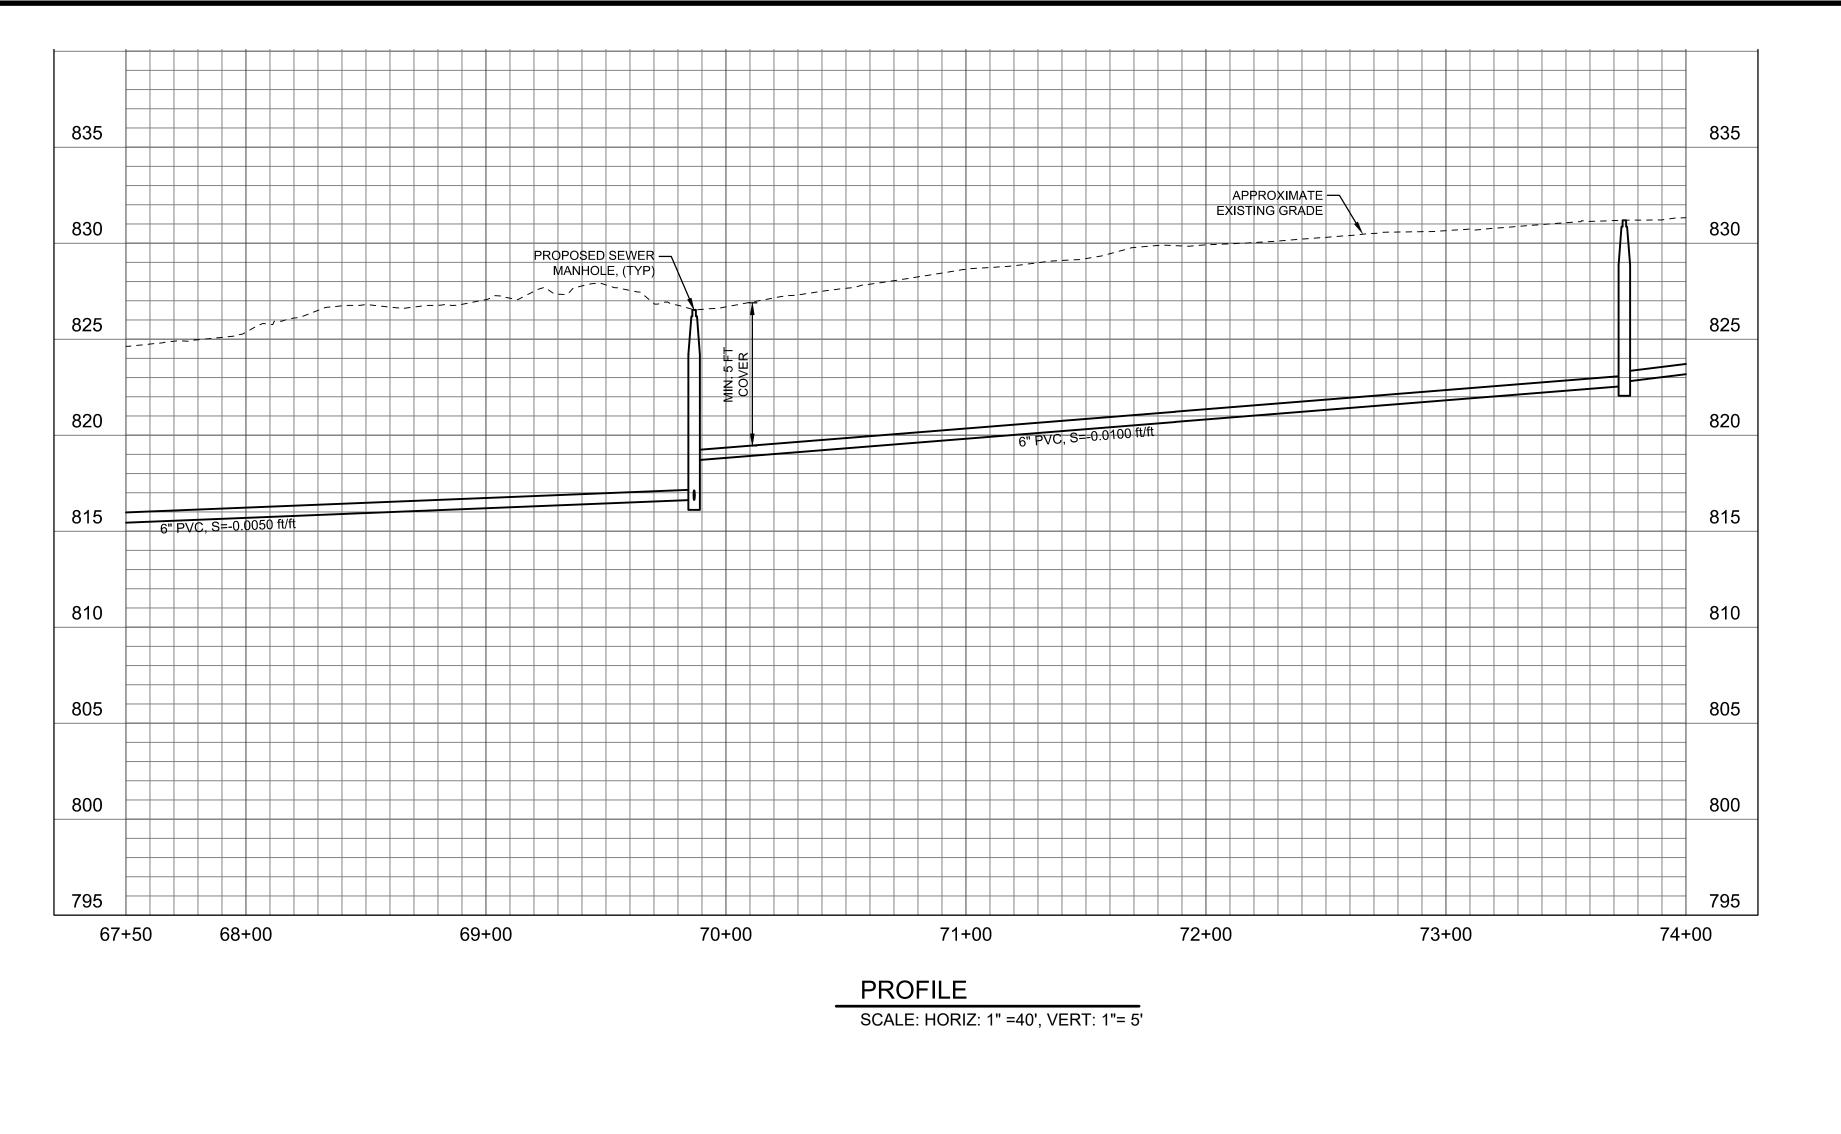

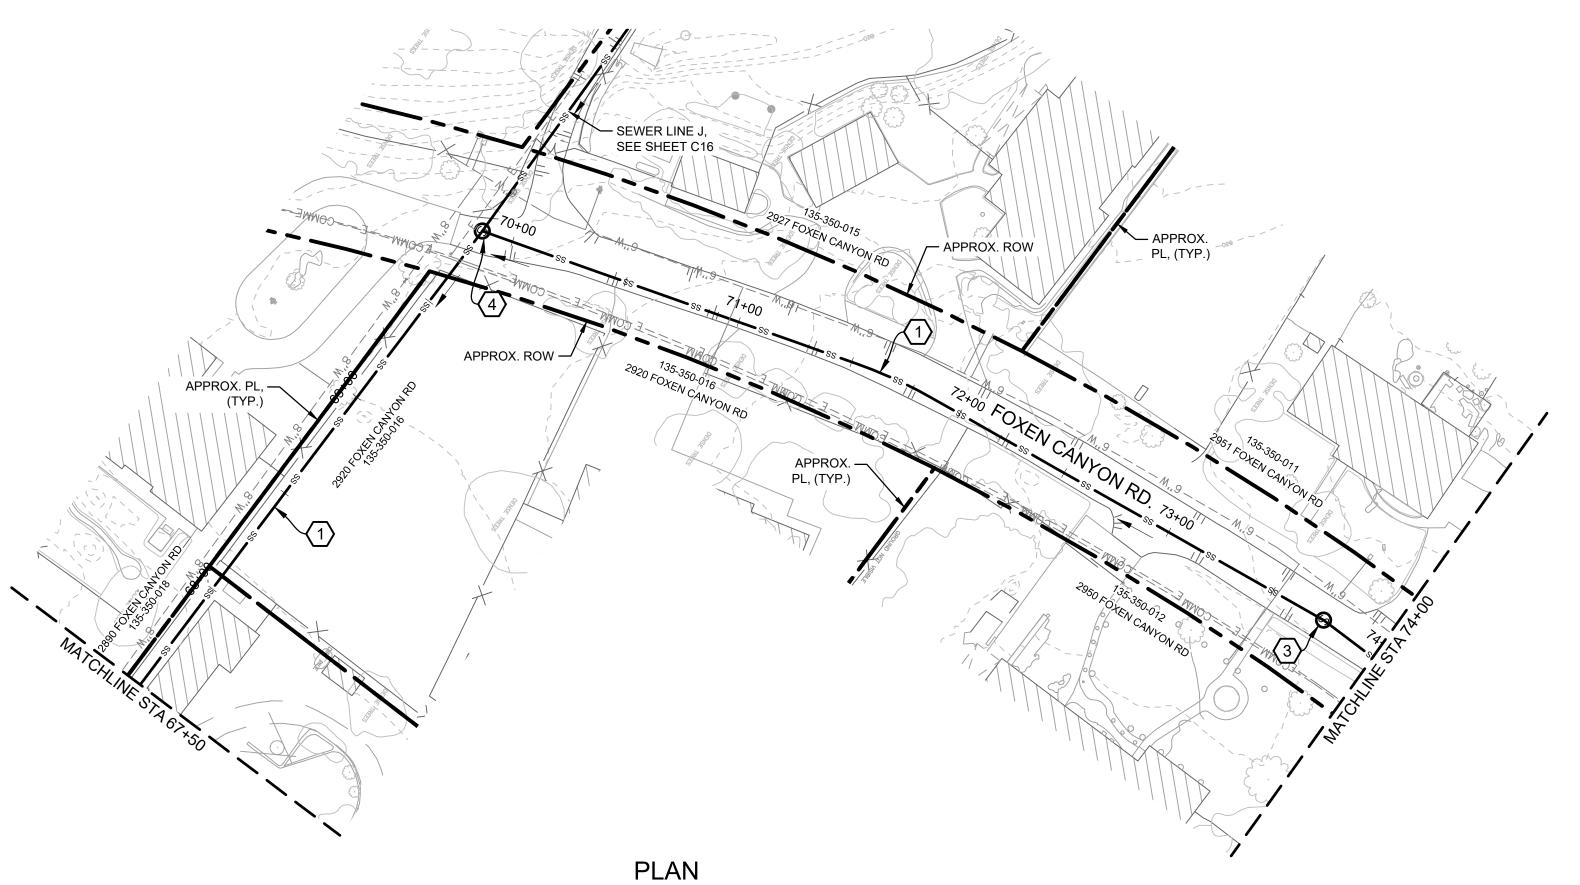

DESIGNED BY: CEP/ JTZ

ALG/ GA

06/28/2022

IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS NOT TO SCALE

DRAFTED BY:


CHECKED BY:

SCALE: 1" = 40'

REVISIONS

NO. DATE

30% SUBMITTAL

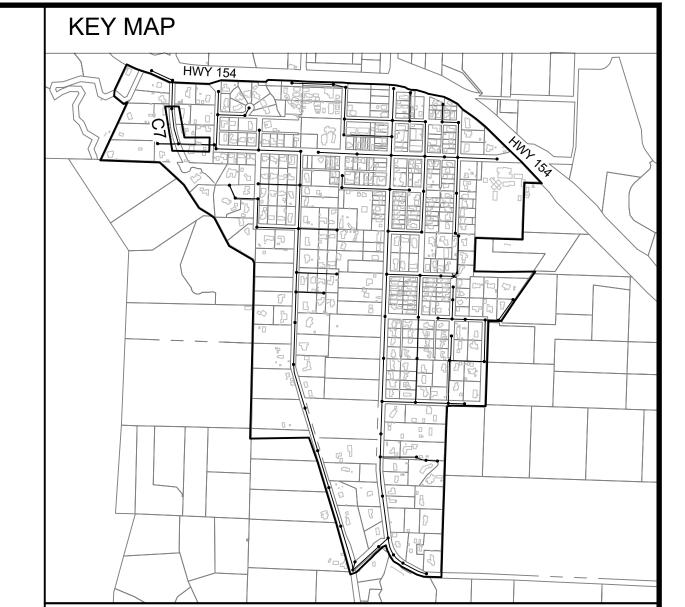

### GENERAL SHEET NOTES

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (2) CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.




Stantec

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE AUOT PLAN AND PROFILEON STA 67+50 TO STA 74+00 ALAMO PINTADO AVE. & FOXEN CYN RD. PROJECT NO. 184031368


> DWG NO. C7 SHT. 9 OF 54

LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

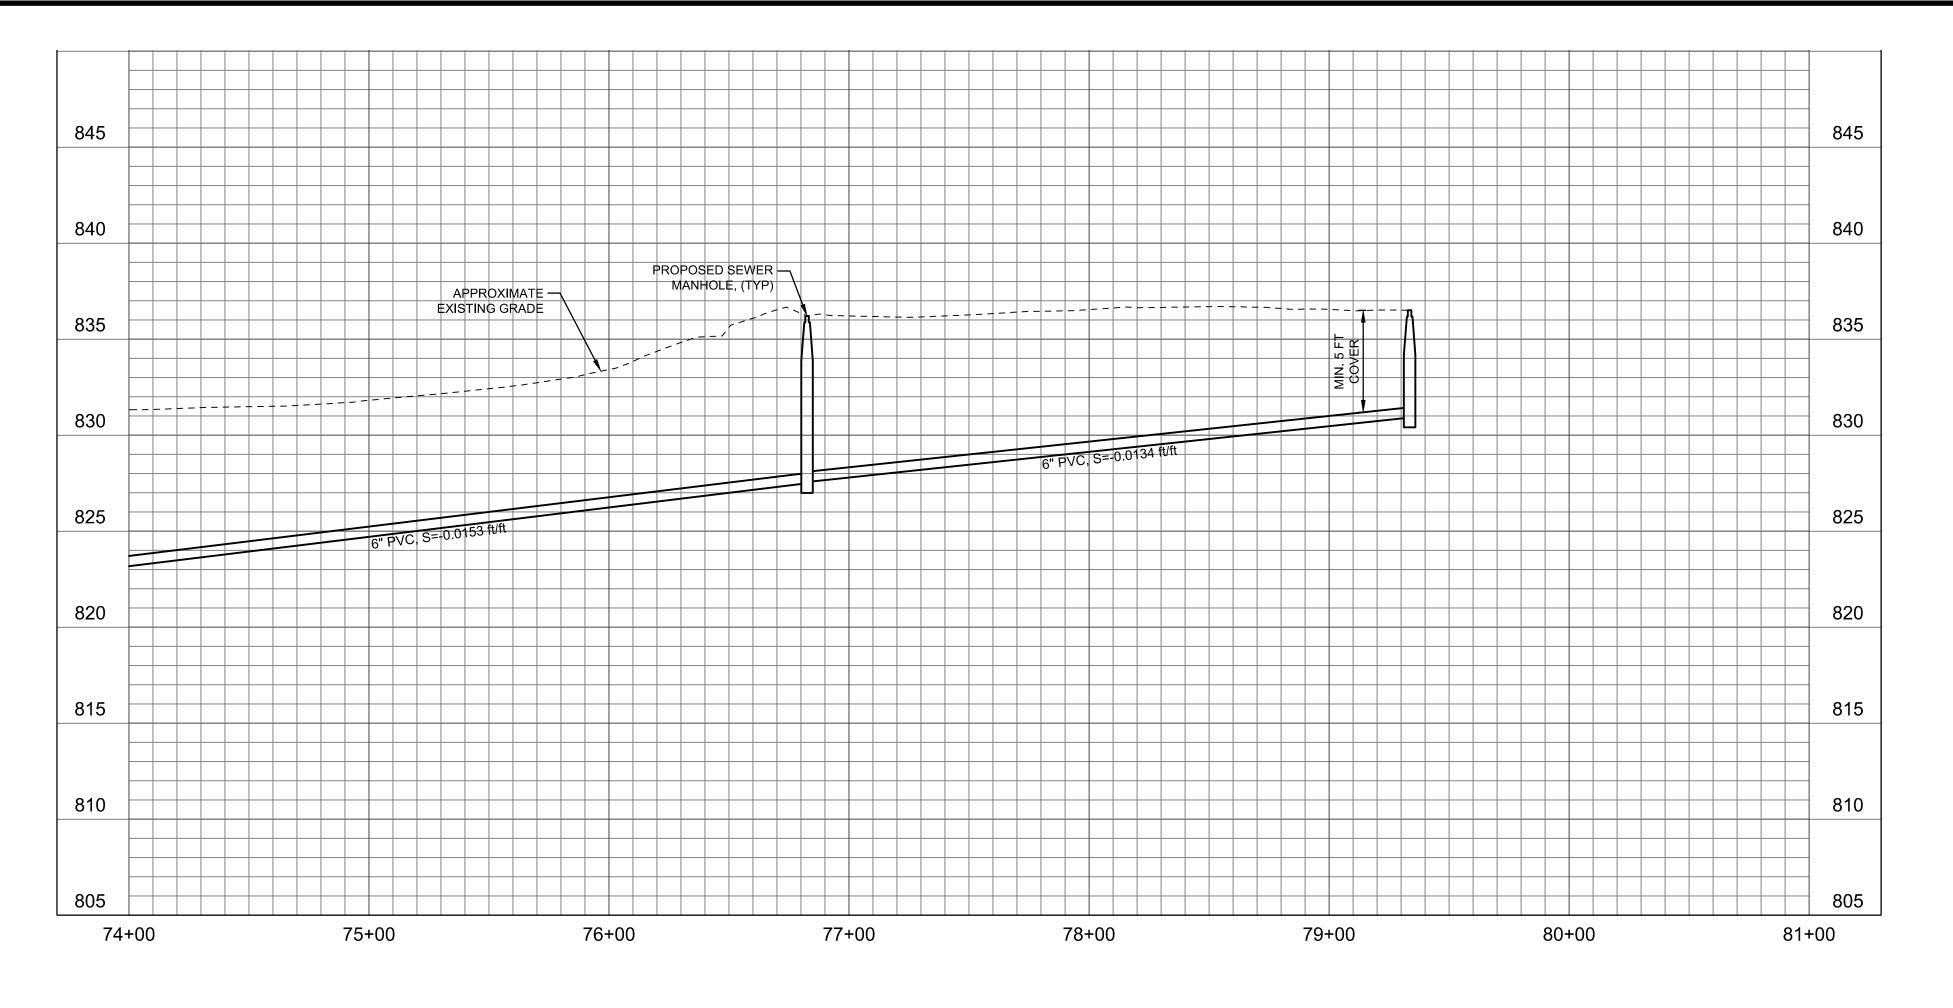

SCALE: HORIZ: 1" =40', VERT: 1"= 5'

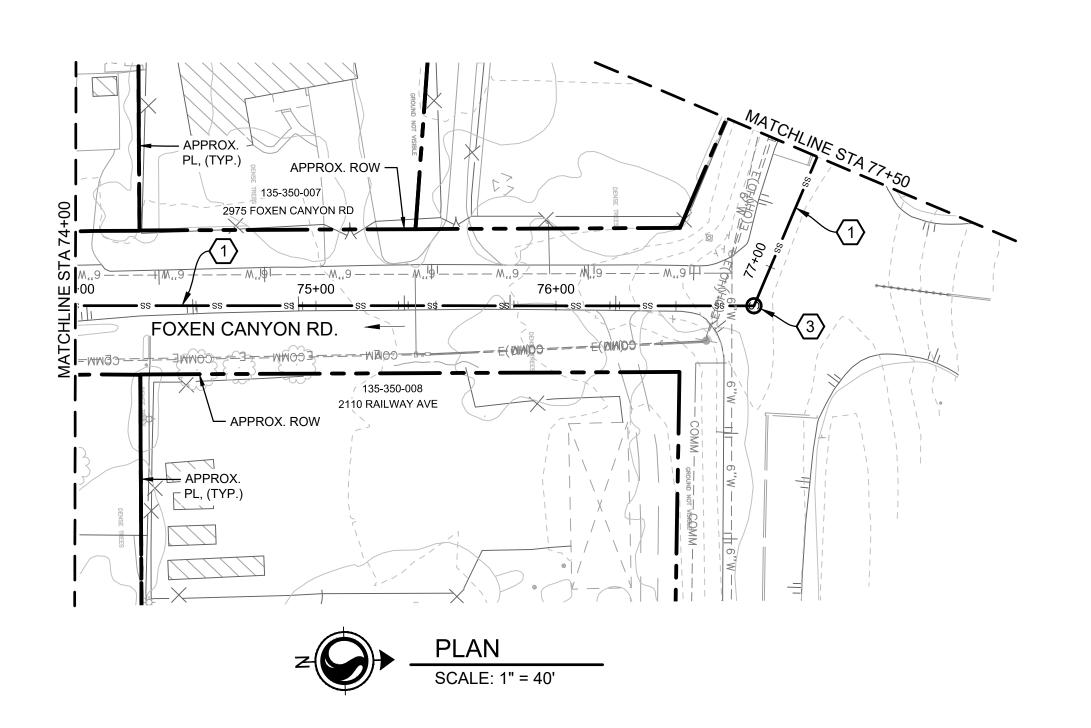


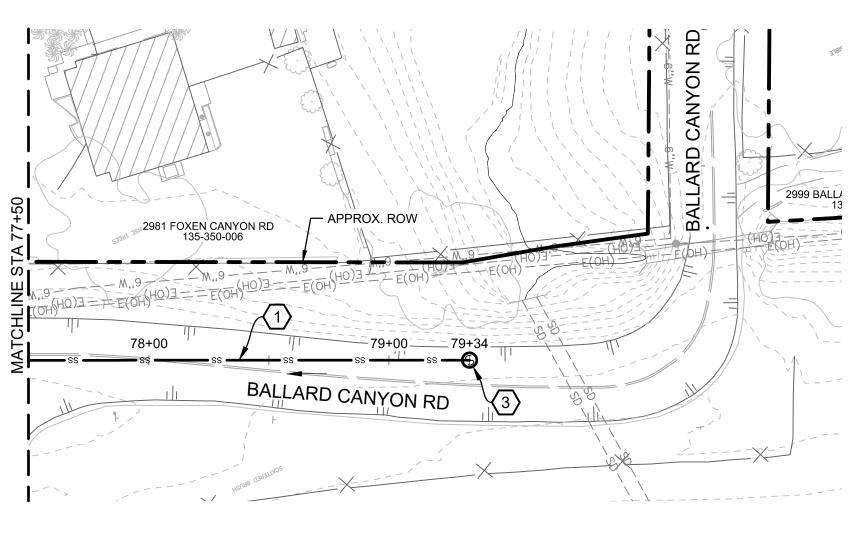



30% SUBMITTAL

CEP/ JTZ DESIGNED BY: DRAFTED BY: ALG/ GA CHECKED BY: 06/28/2022 REVISIONS NO. DATE

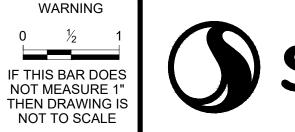

Stantec

LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE AUOT PLAN AND PROFILE STA 74+00 TO STA 79+89 FOXEN CYN RD. & BALLARD CYN RD.

DWG NO. C8

GENERAL SHEET NOTES A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.

CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN. C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER

B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR

MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.

D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

**KEY MAP** 

 $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.

 $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.

(3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.


4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.


 $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.


6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.


PROJECT NO. 184031368

SHT. 10 OF 54

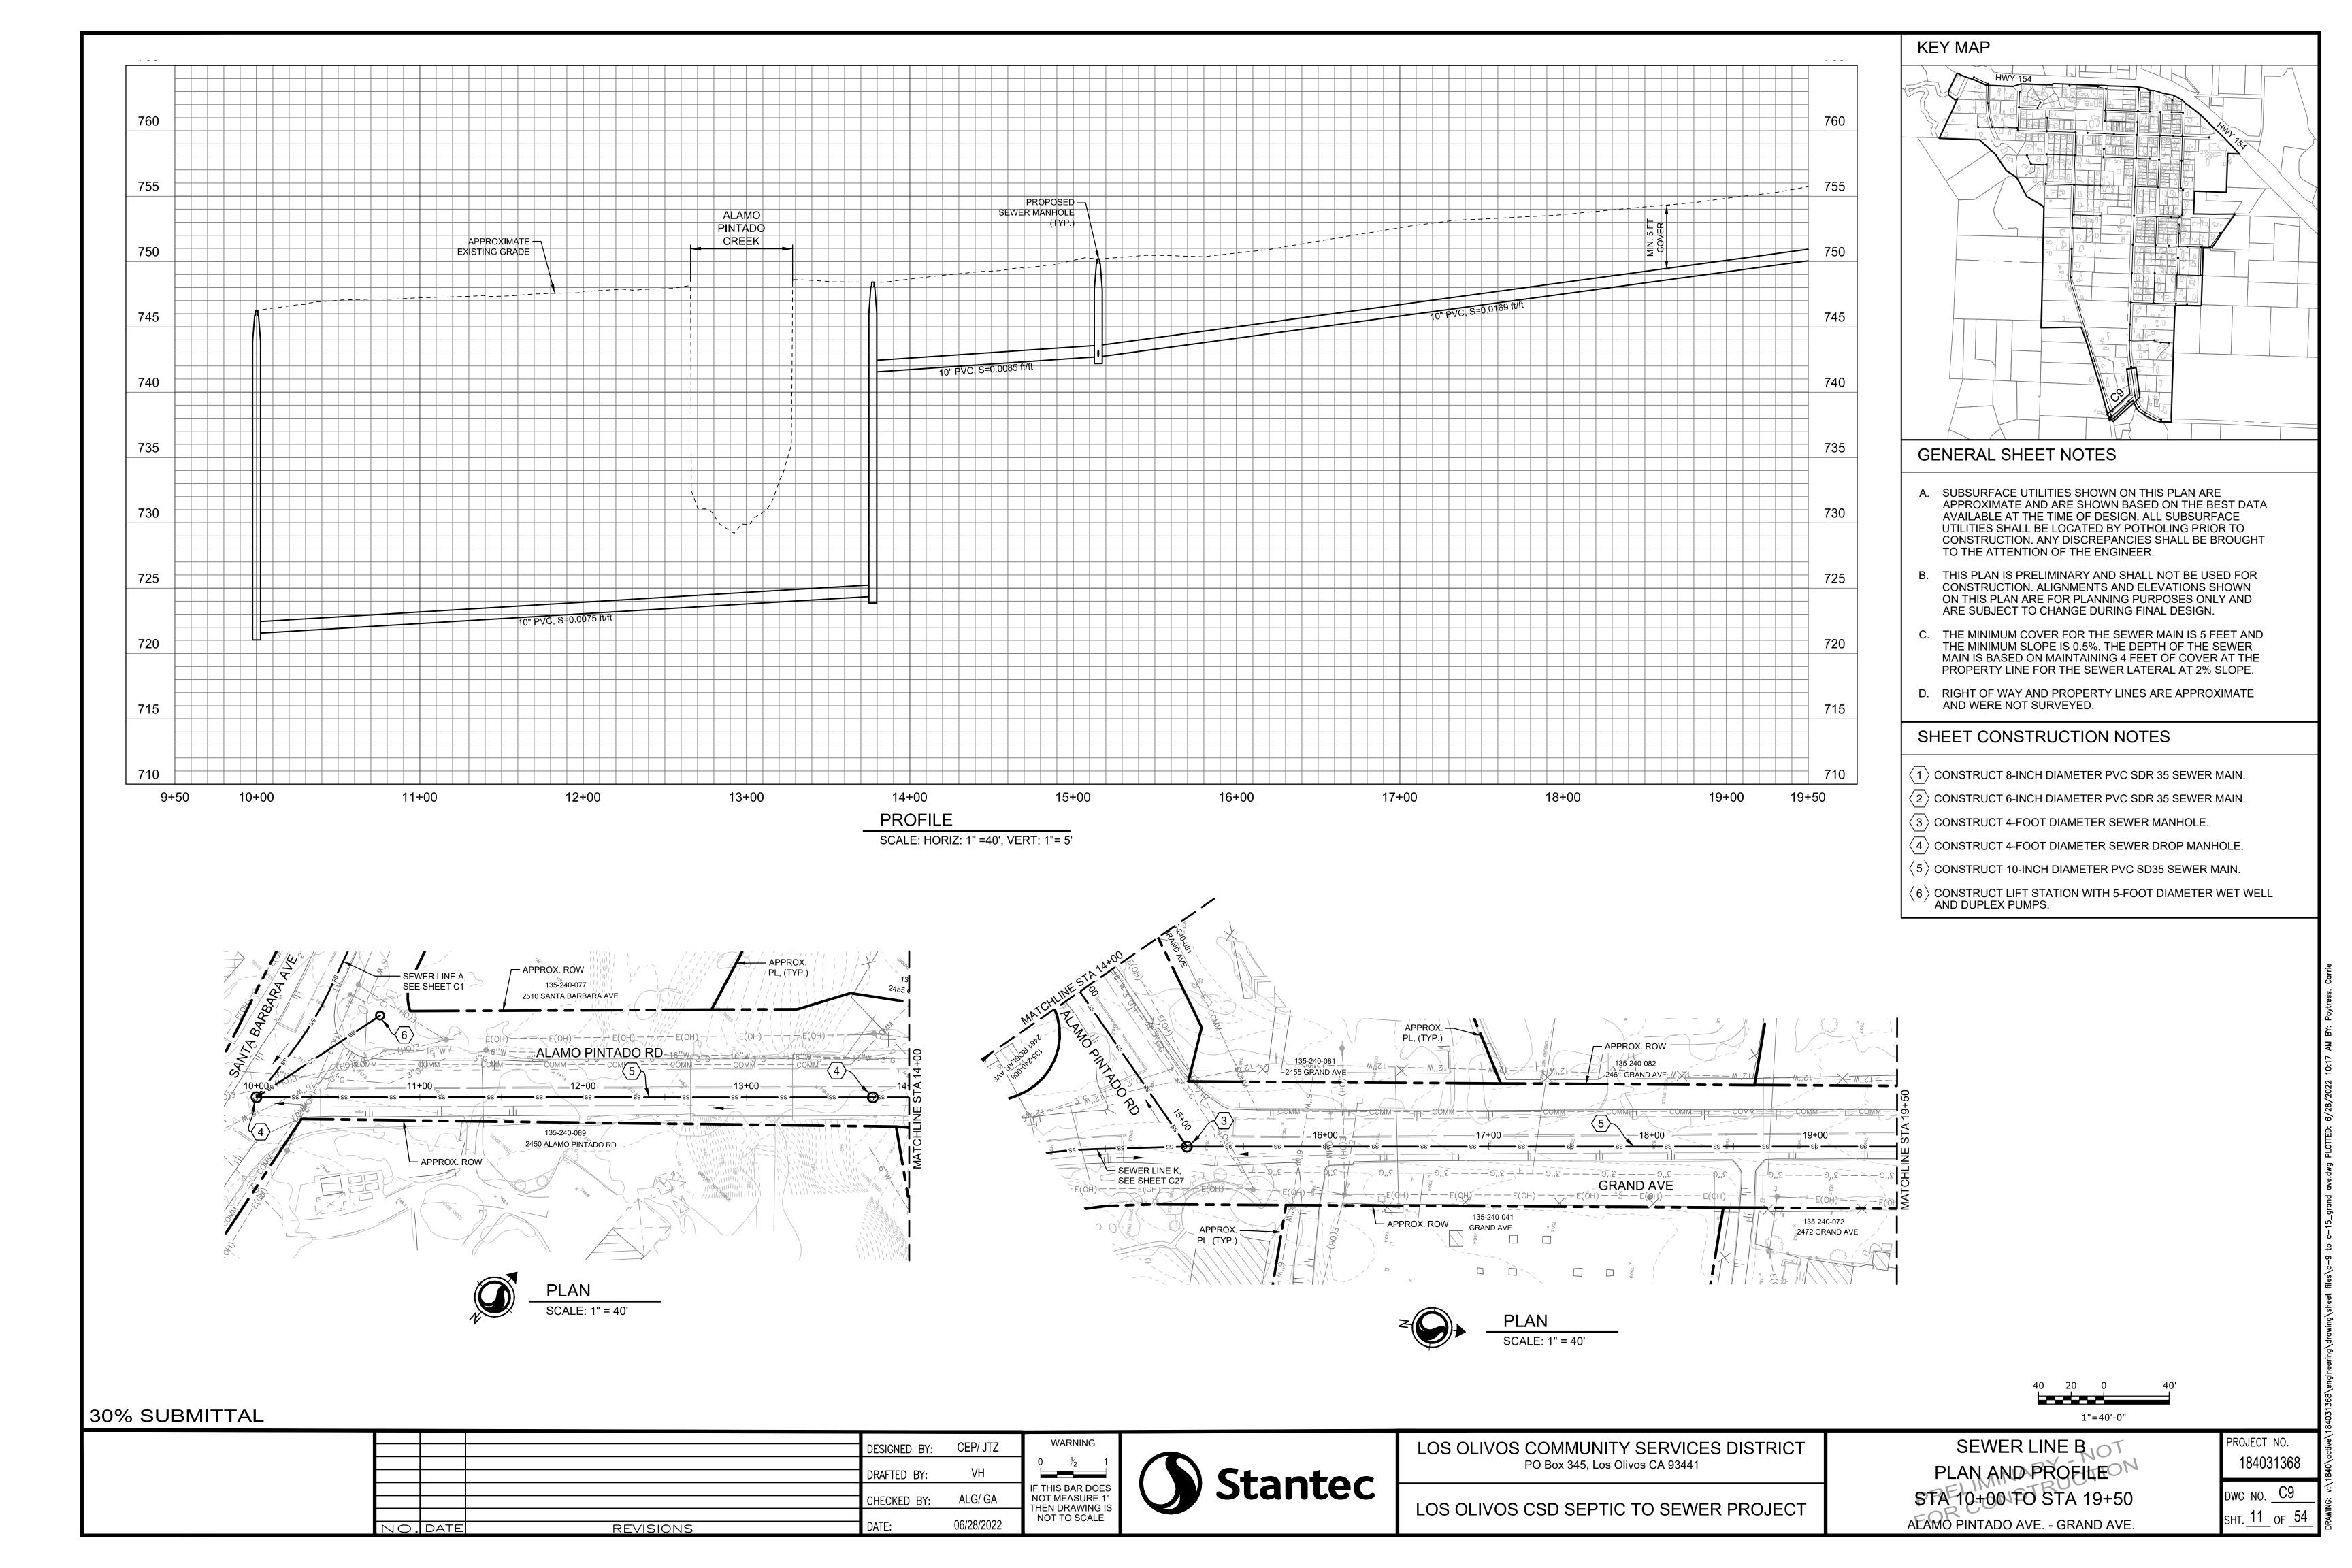

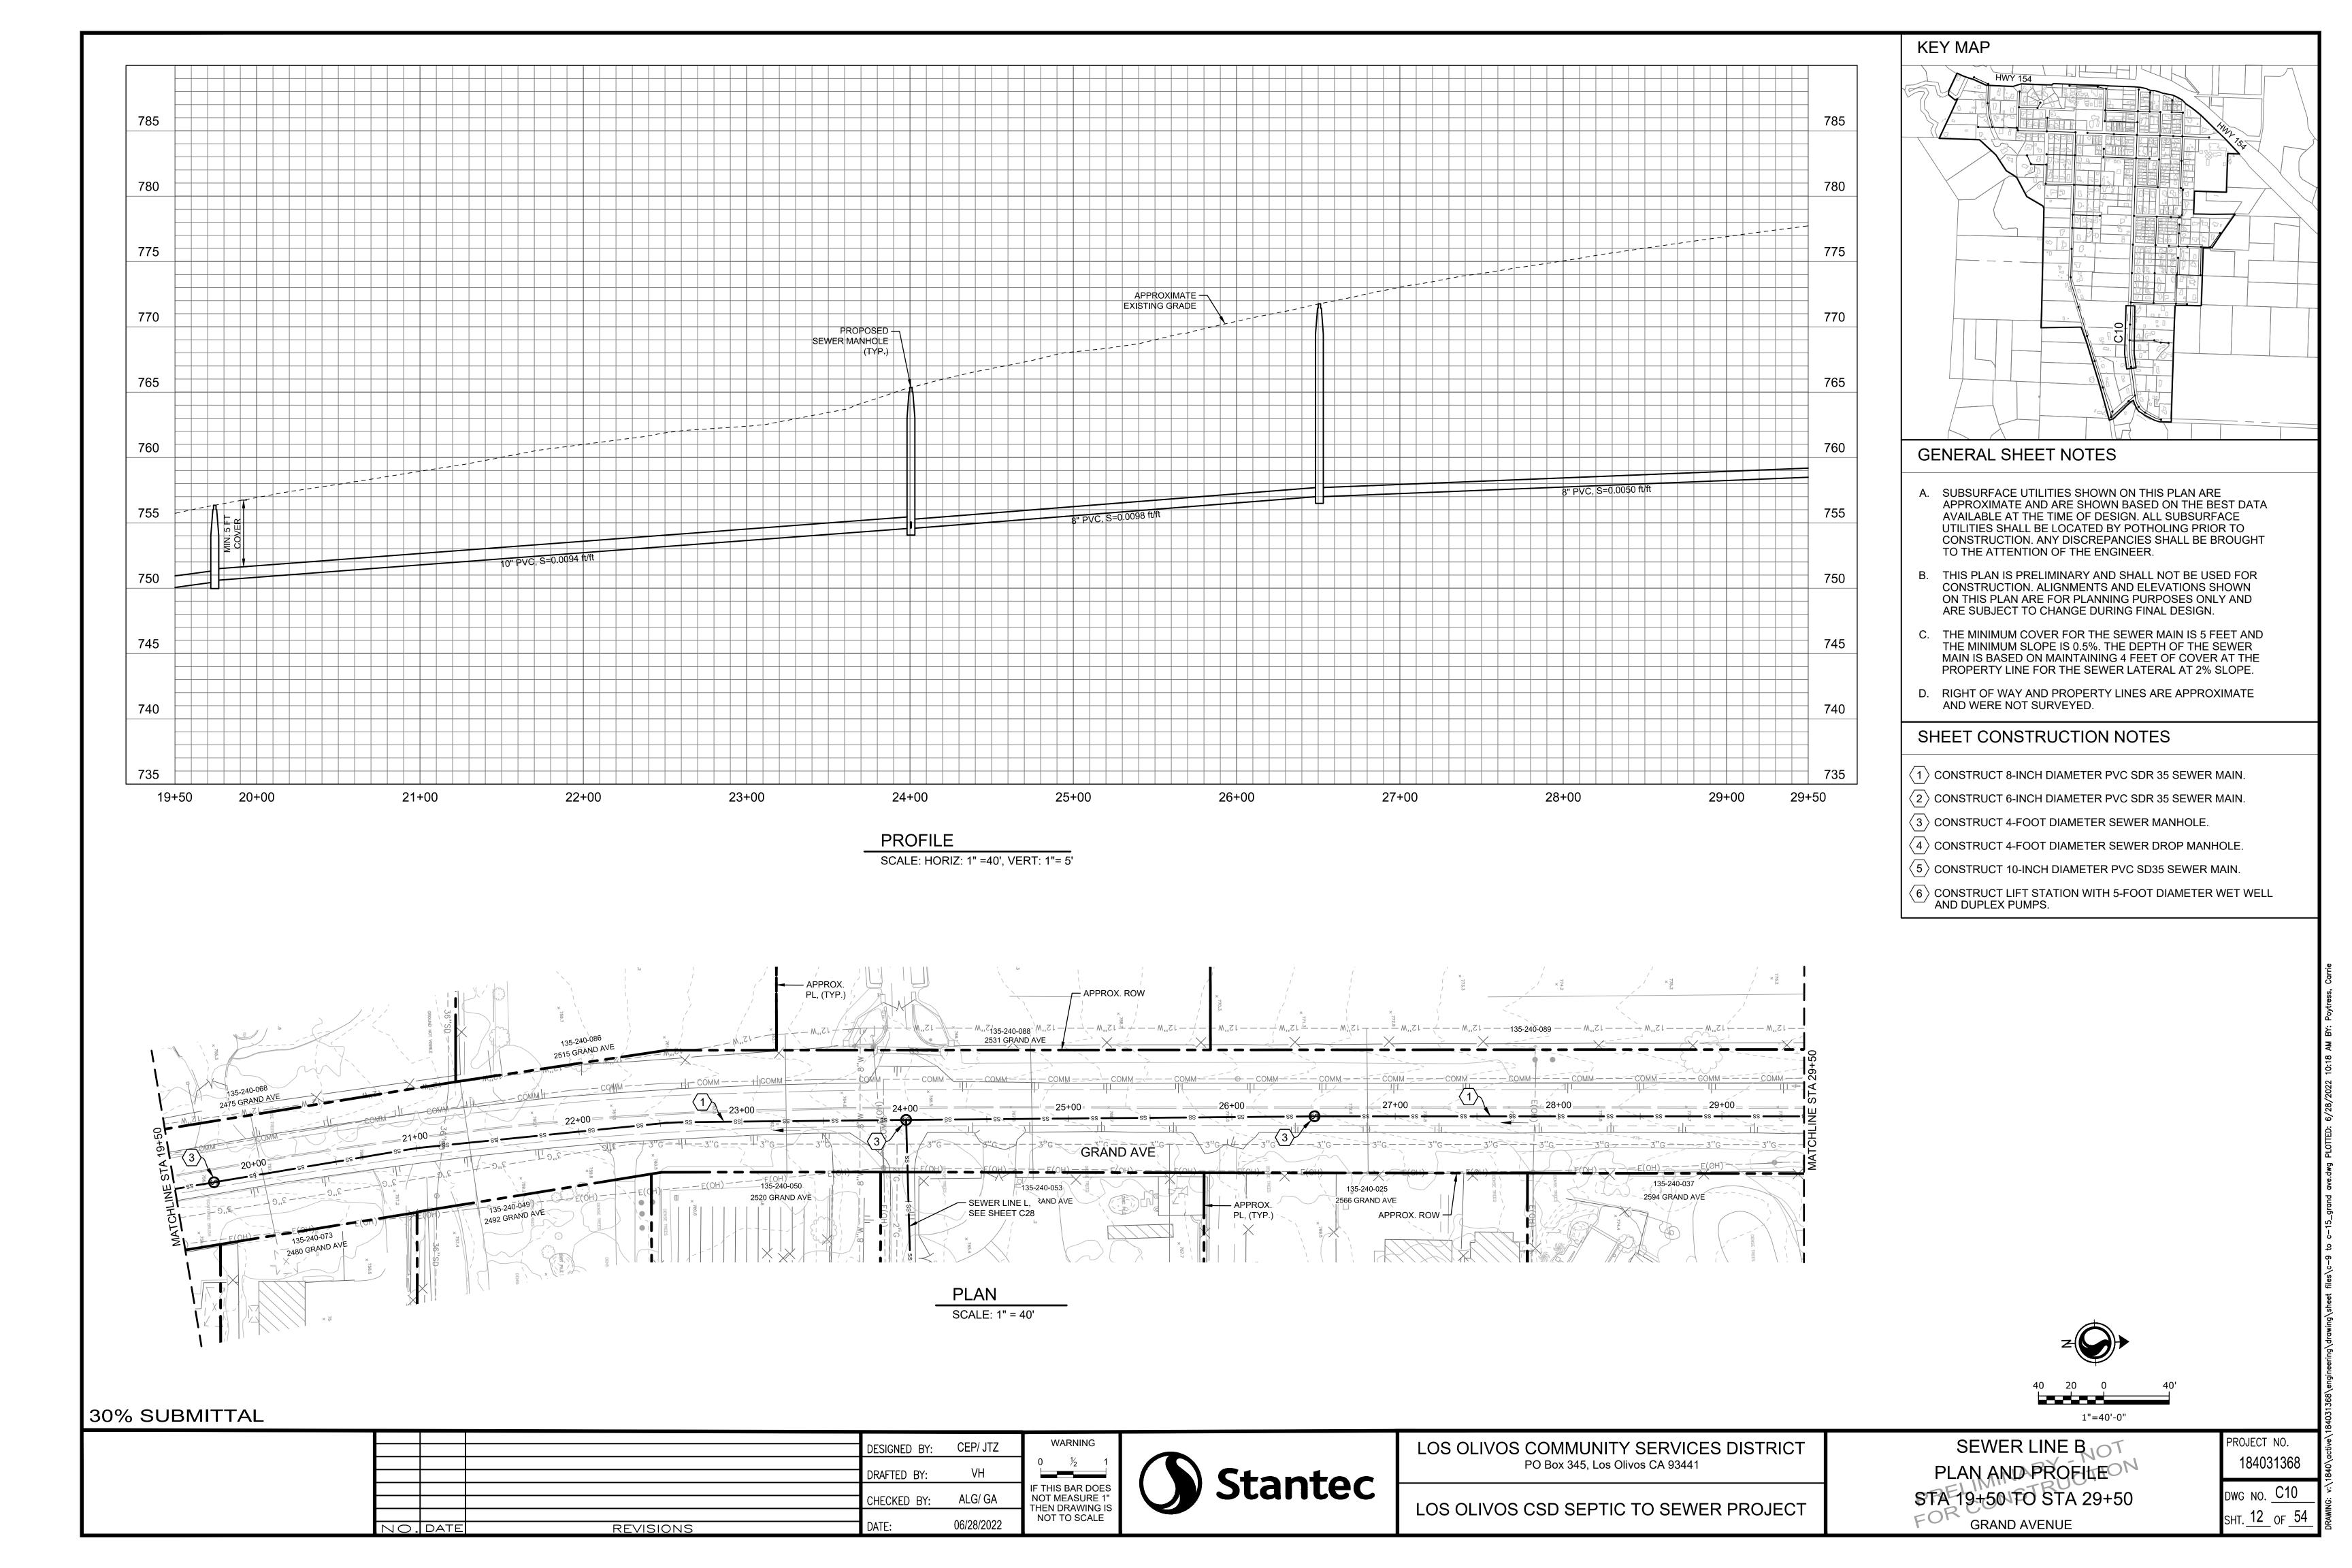

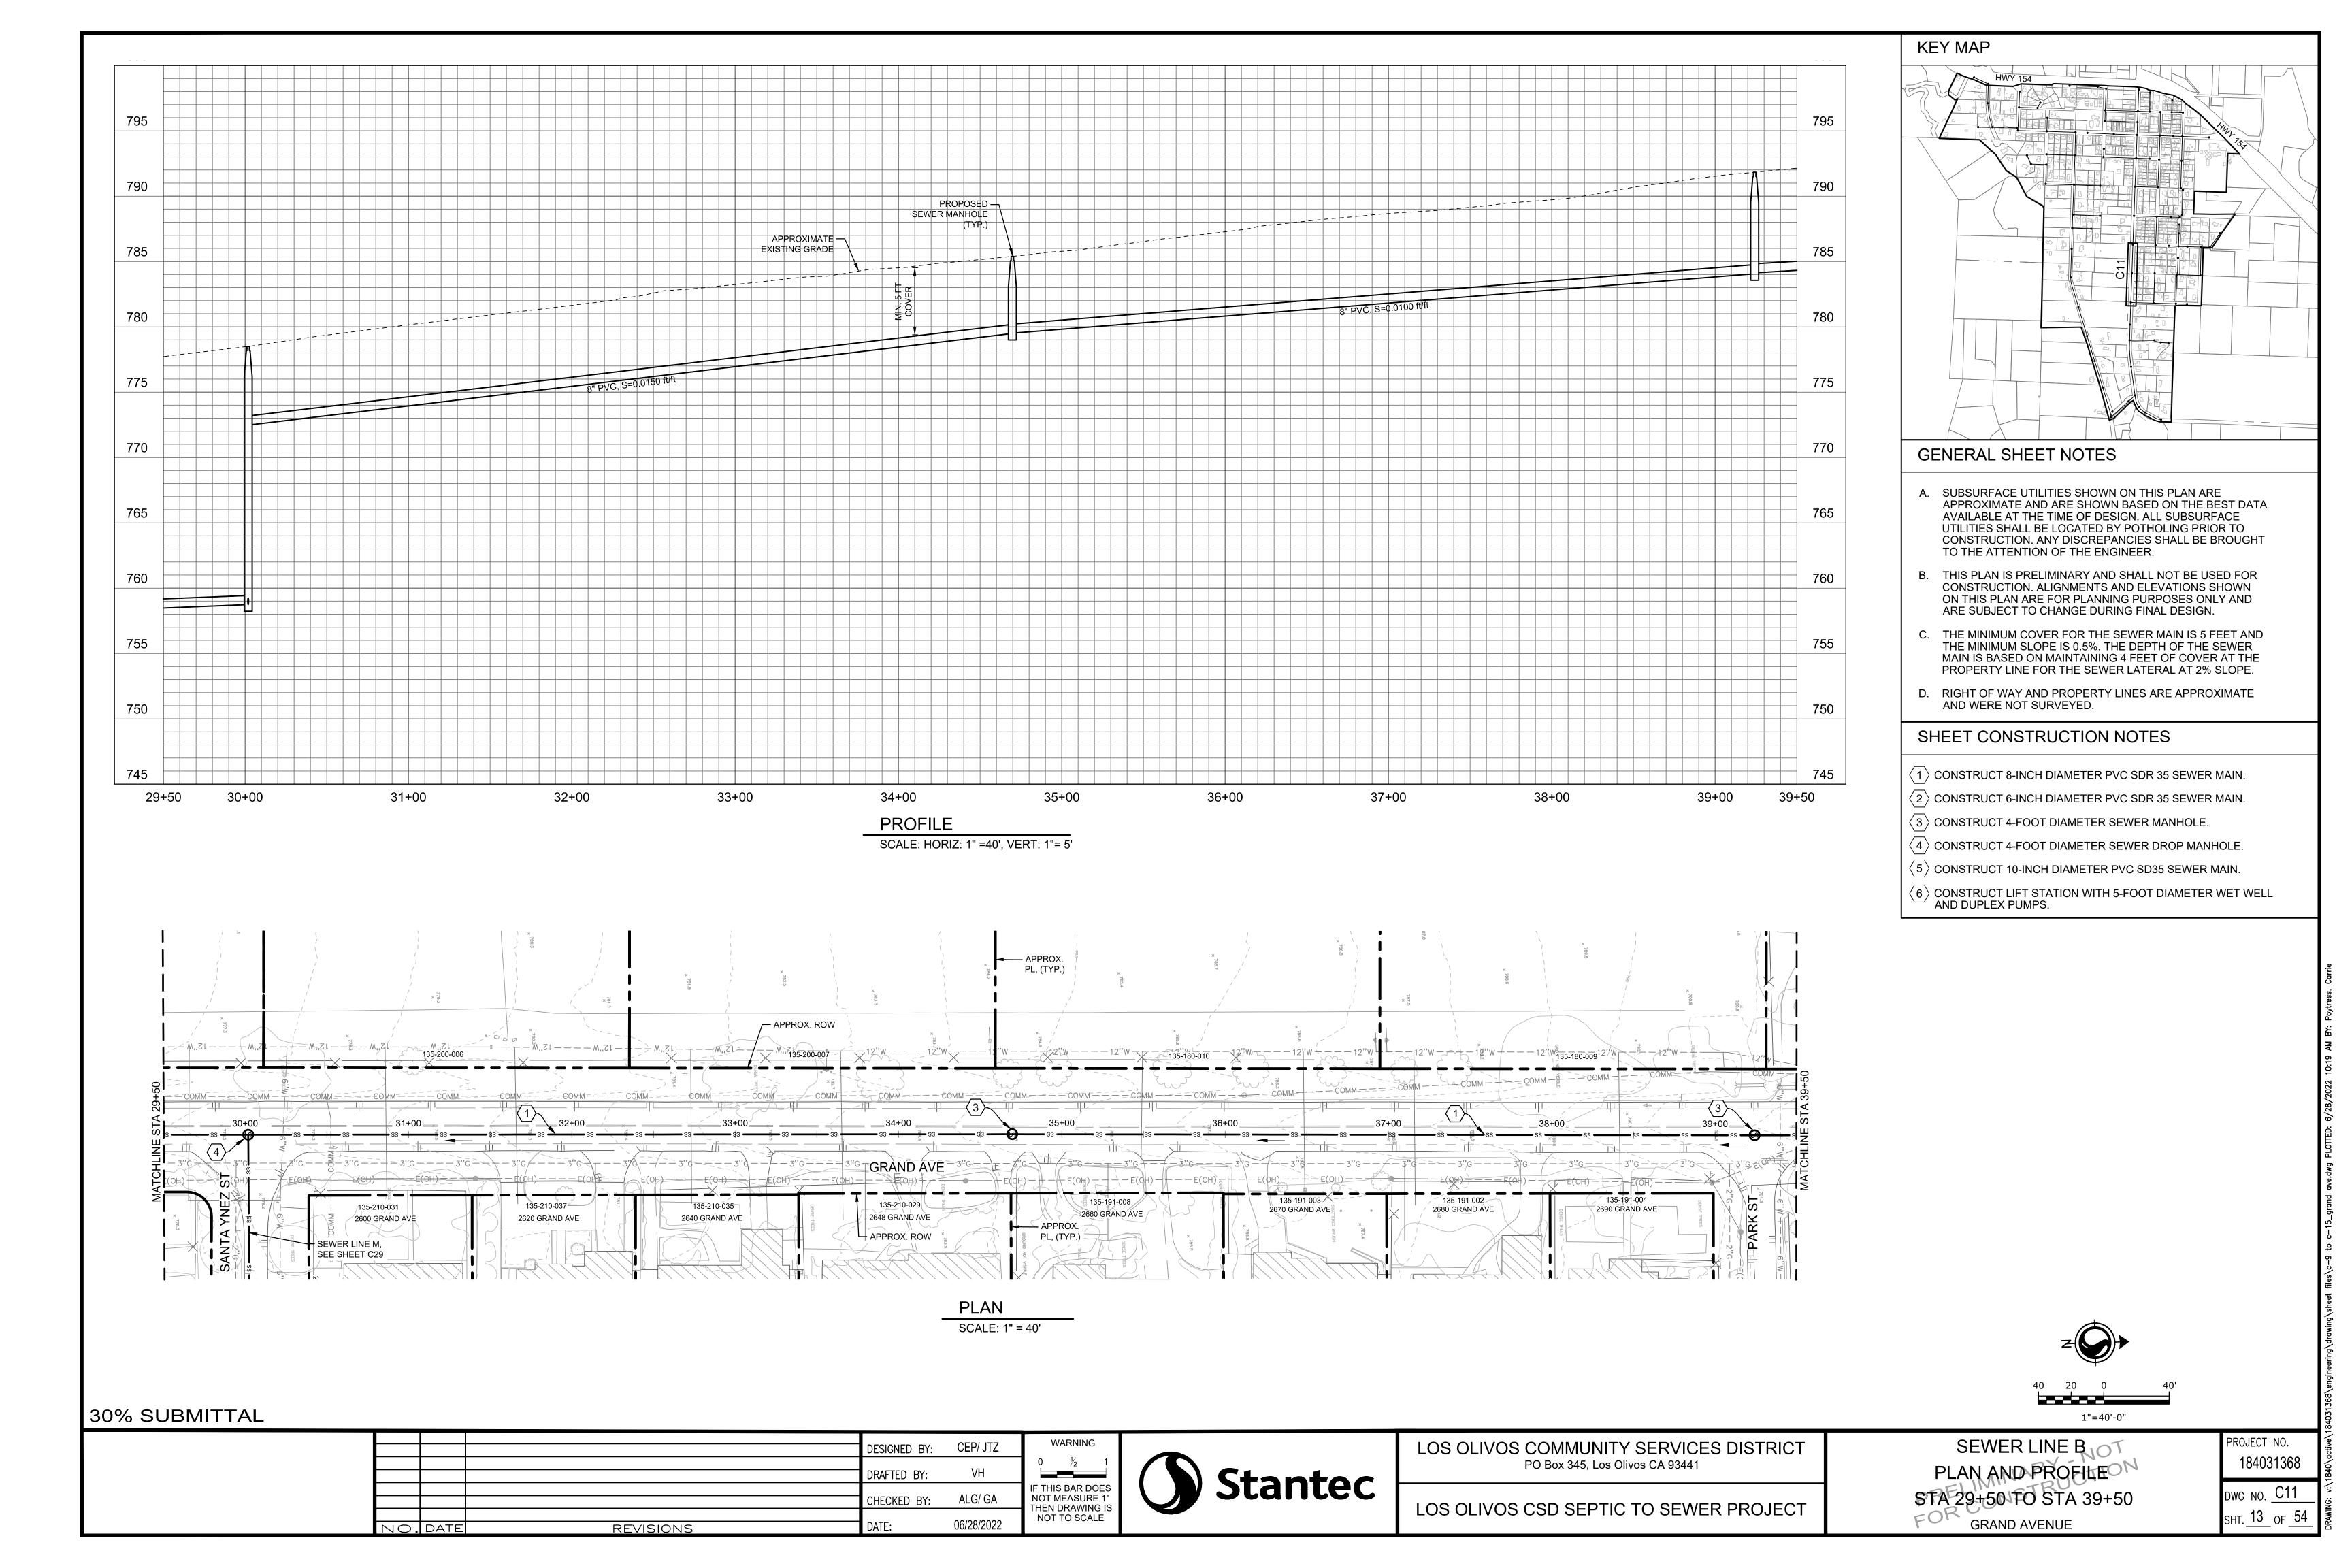

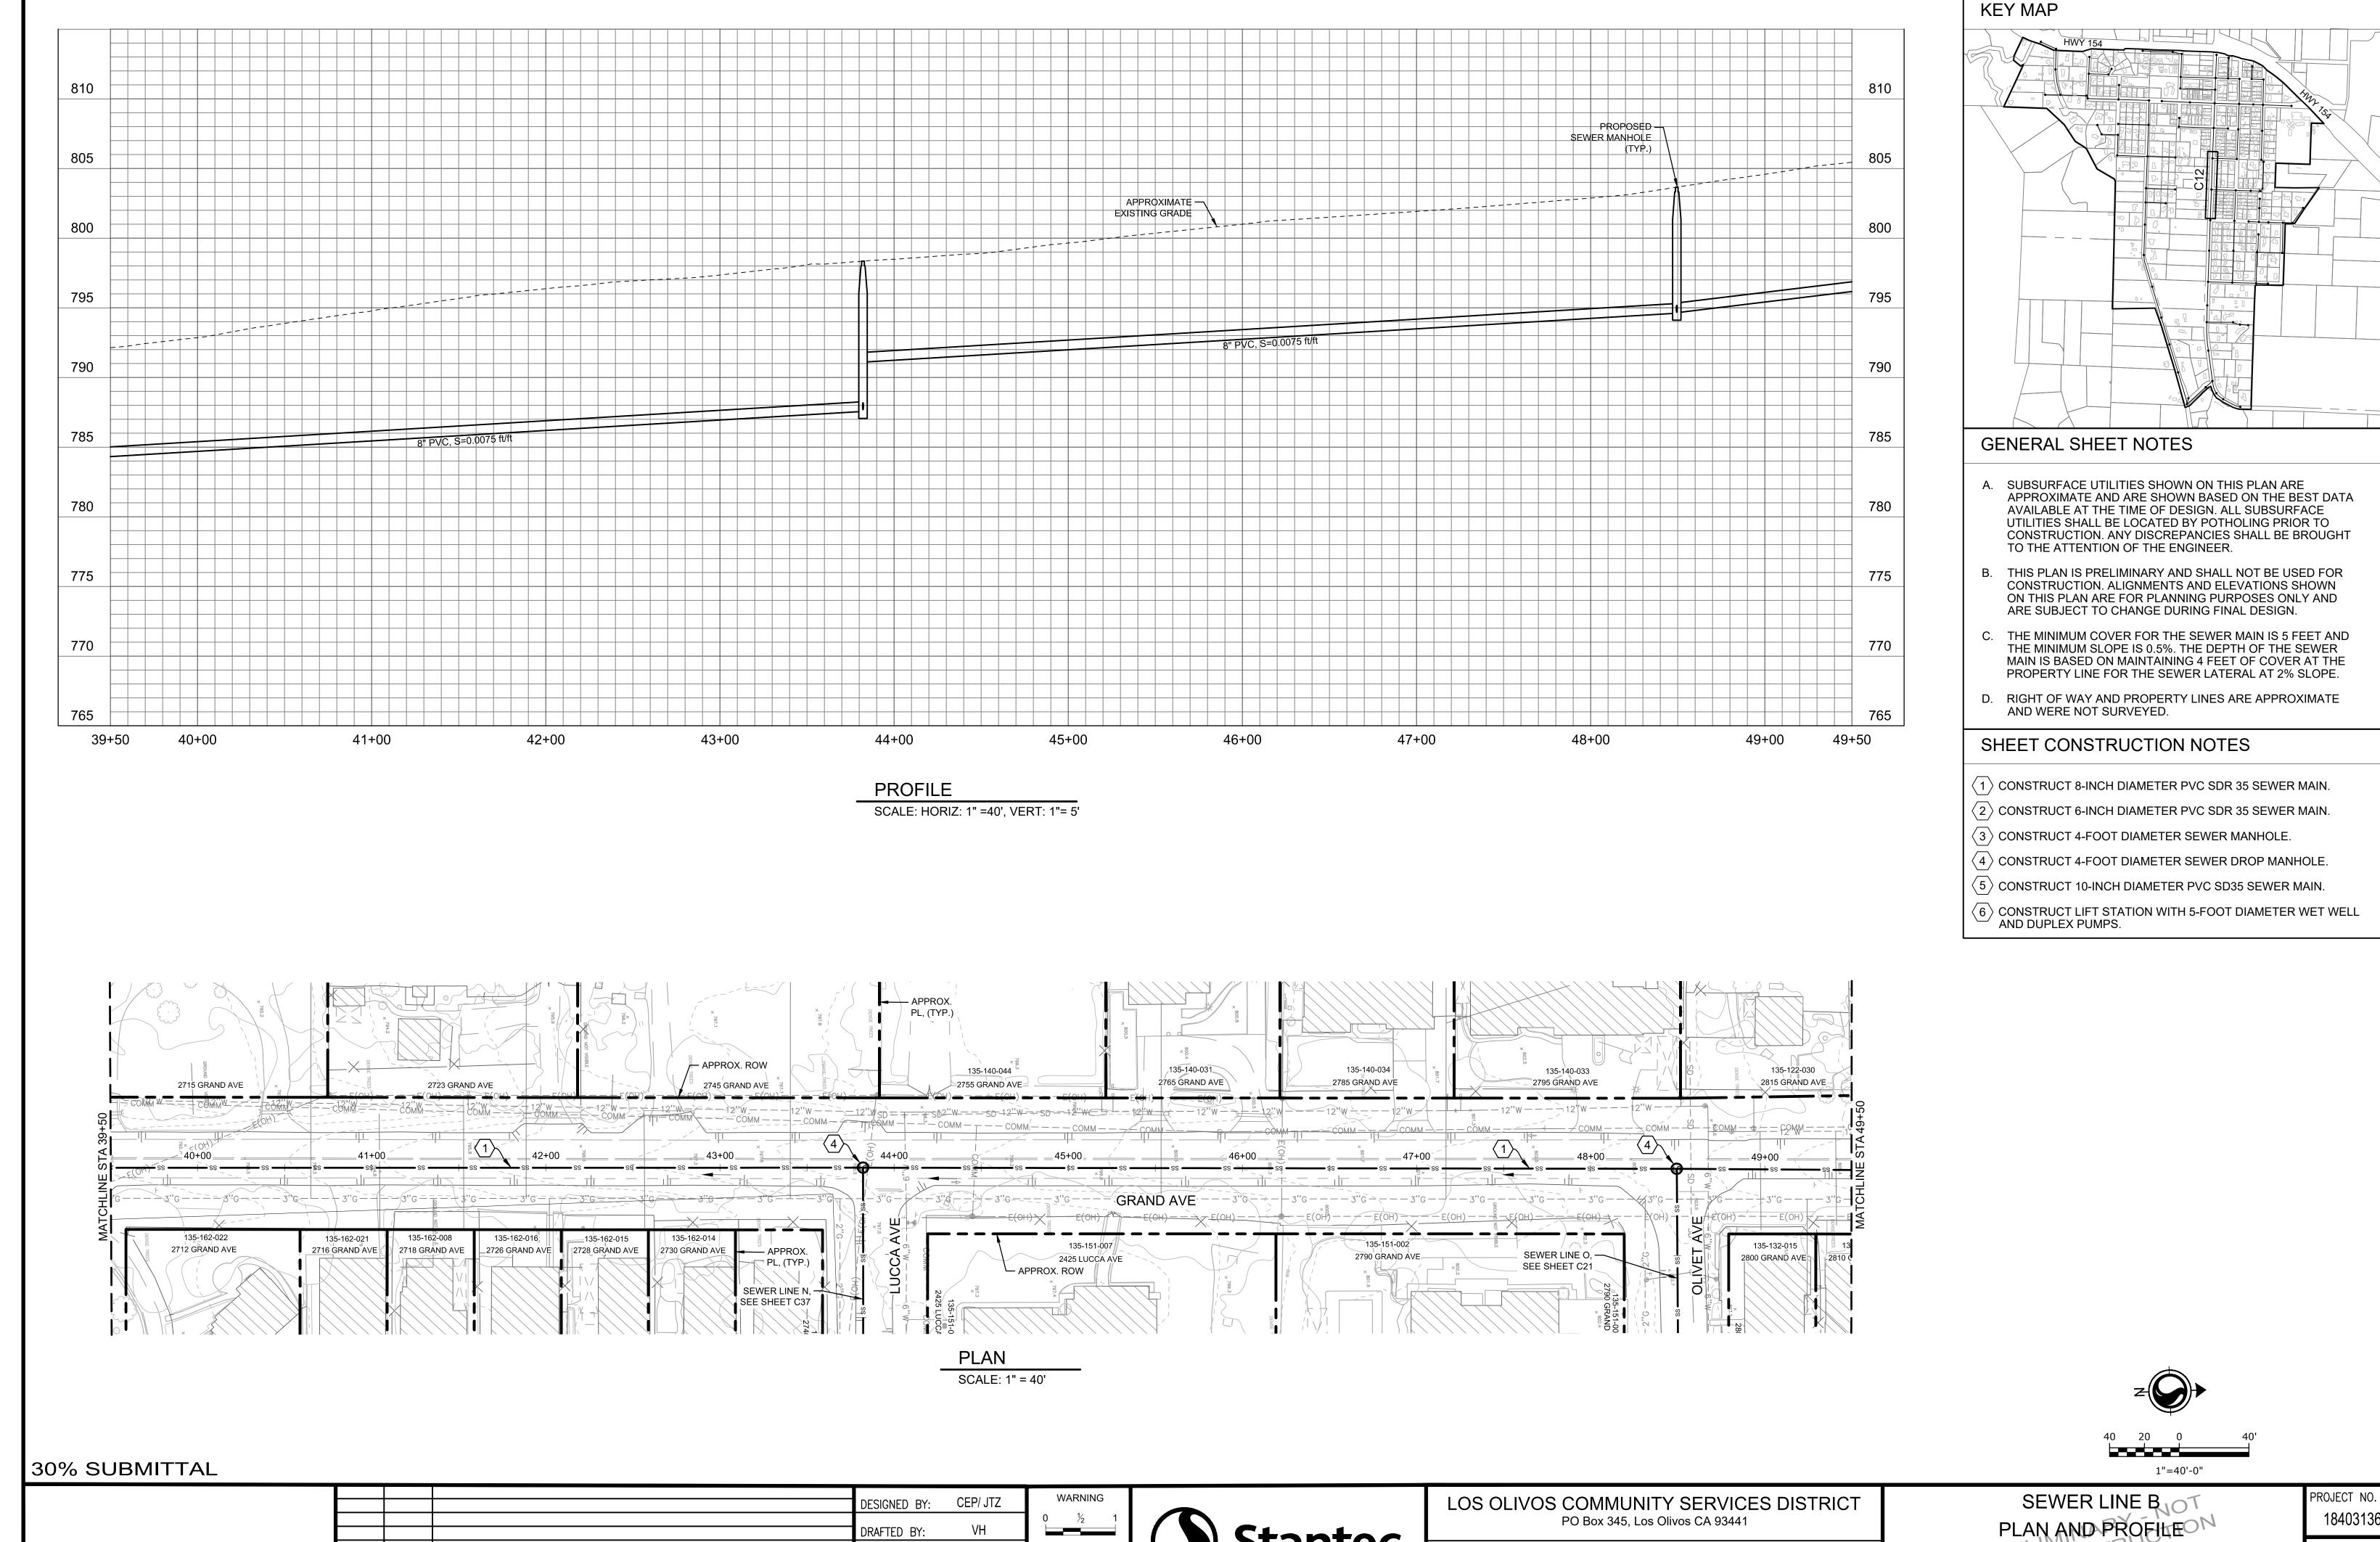

Stantec

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

DRAFTED BY:

CHECKED BY:

REVISIONS

NO. DATE

ALG/ GA

06/28/2022

IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS


NOT TO SCALE


PROJECT NO. 184031368 DWG NO. C12


SHT. 14 OF 54


STA 39+50 TO STA 49+50

**GRAND AVENUE** 

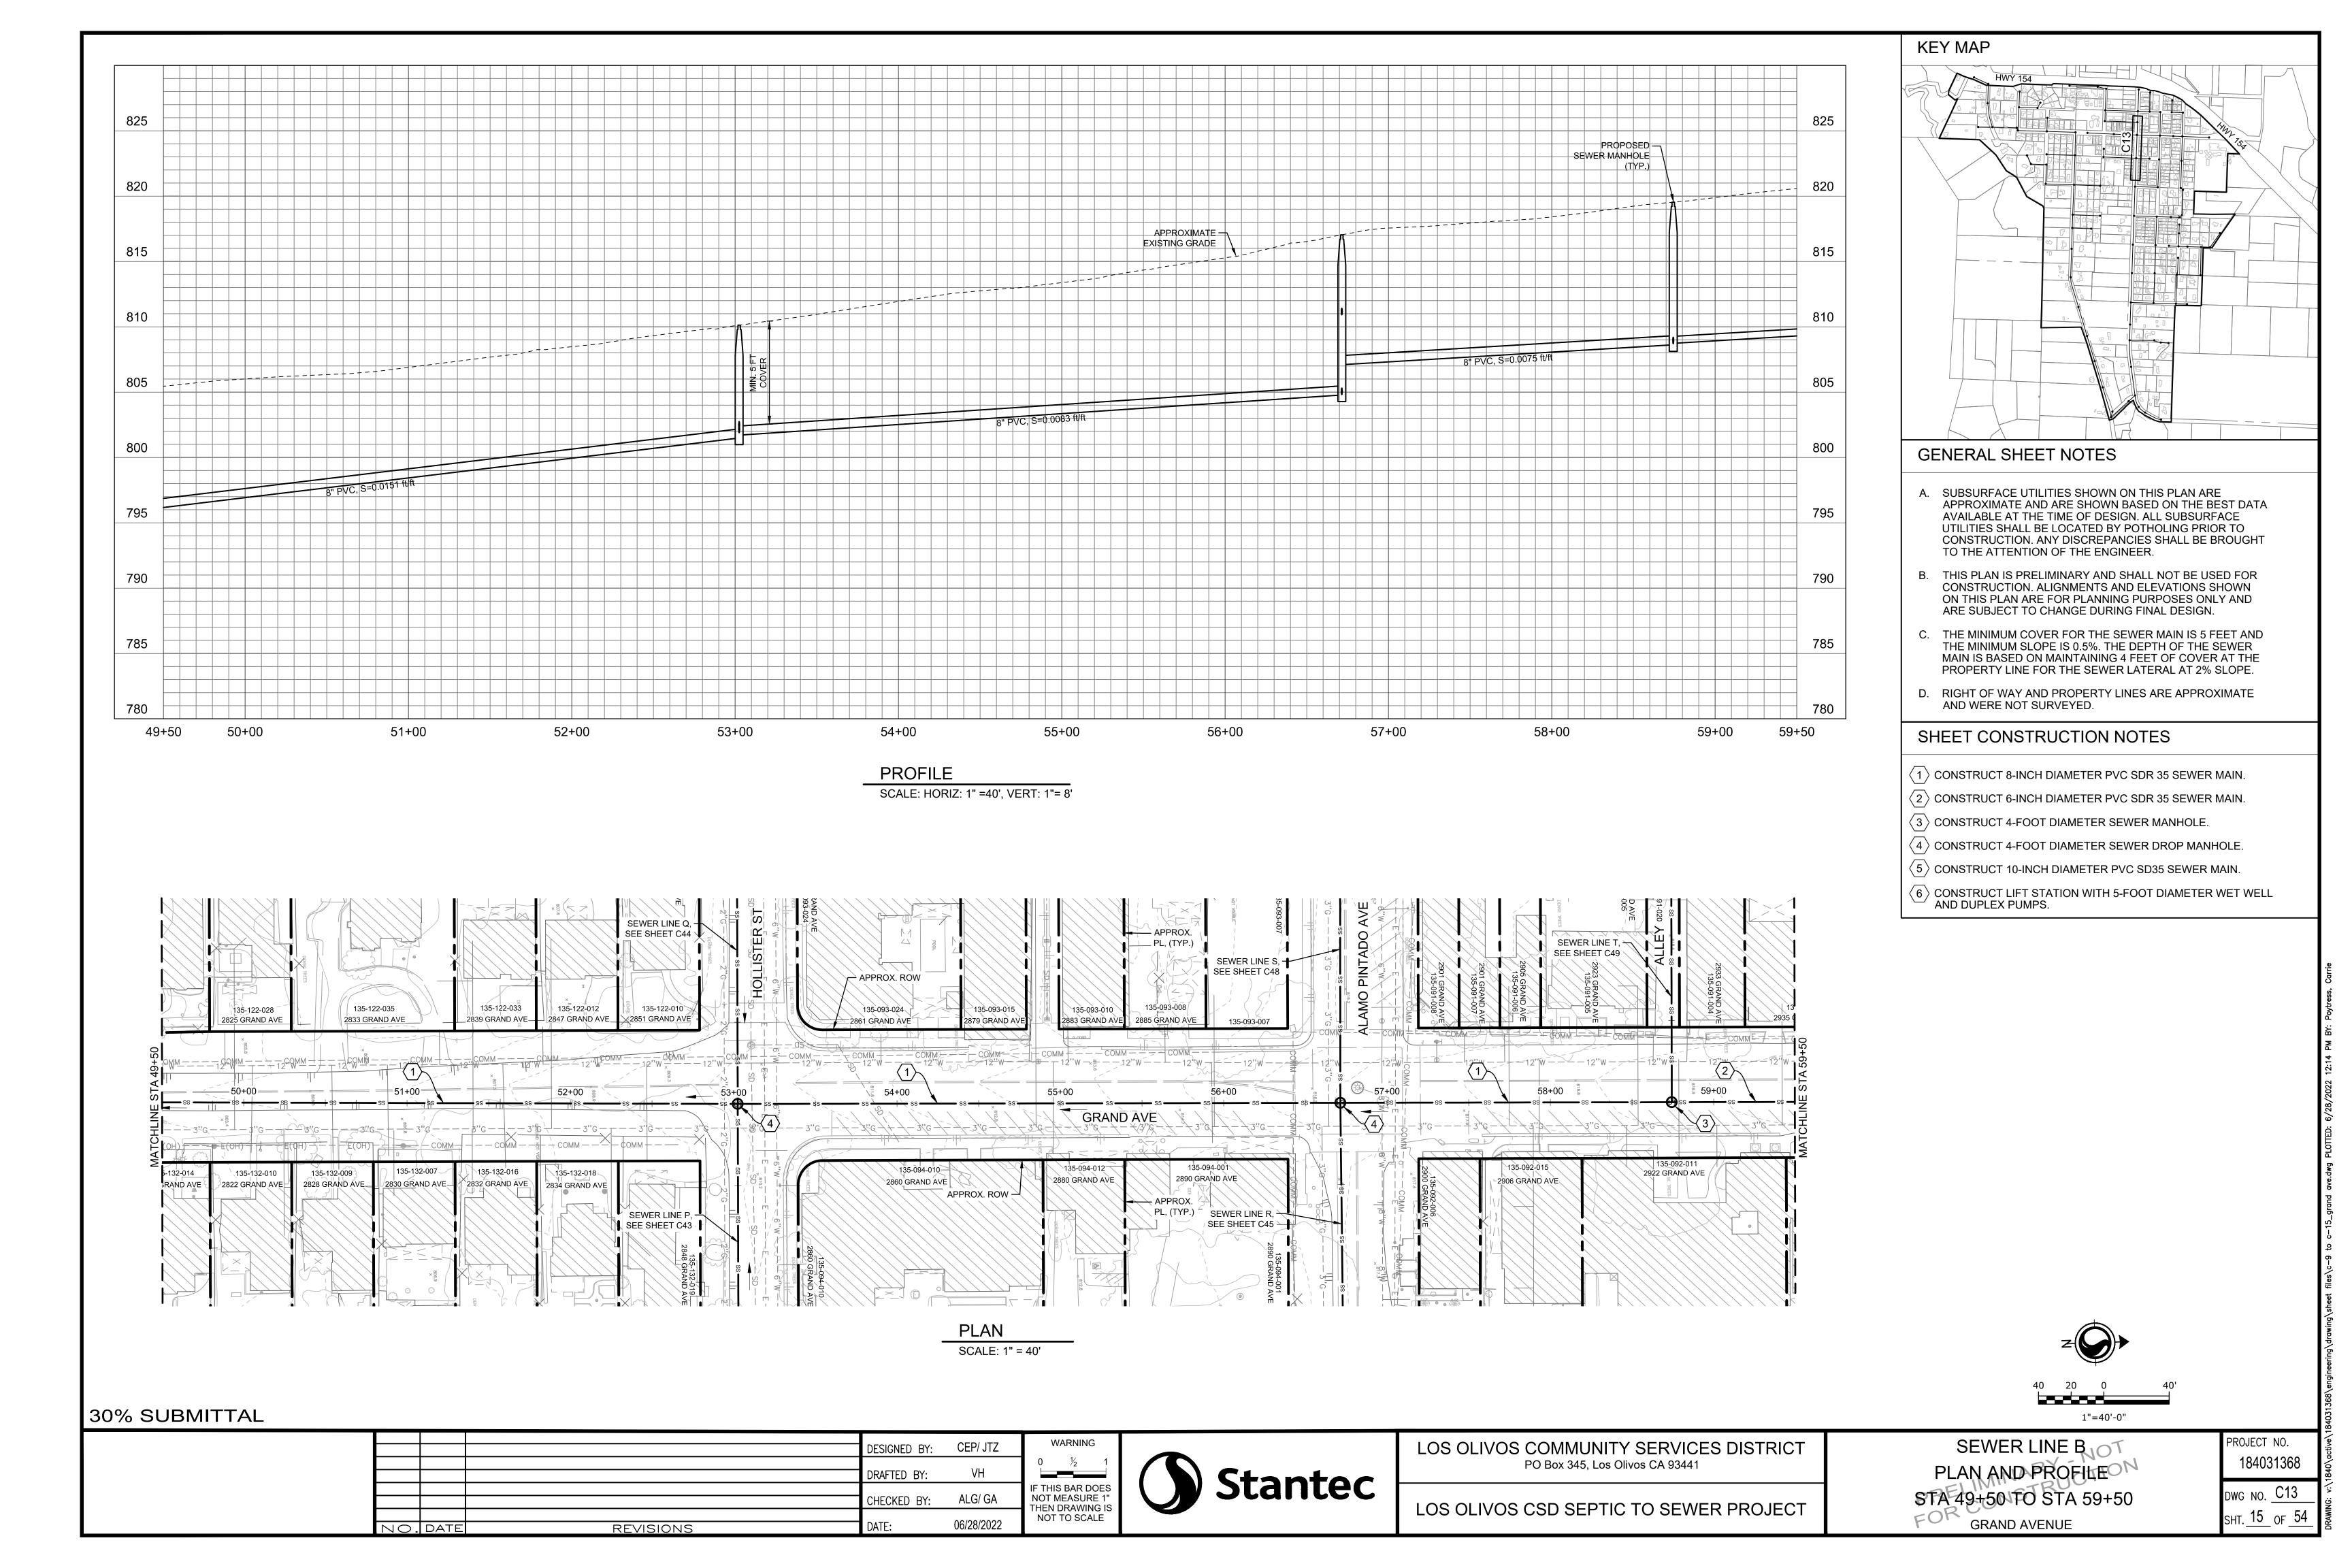

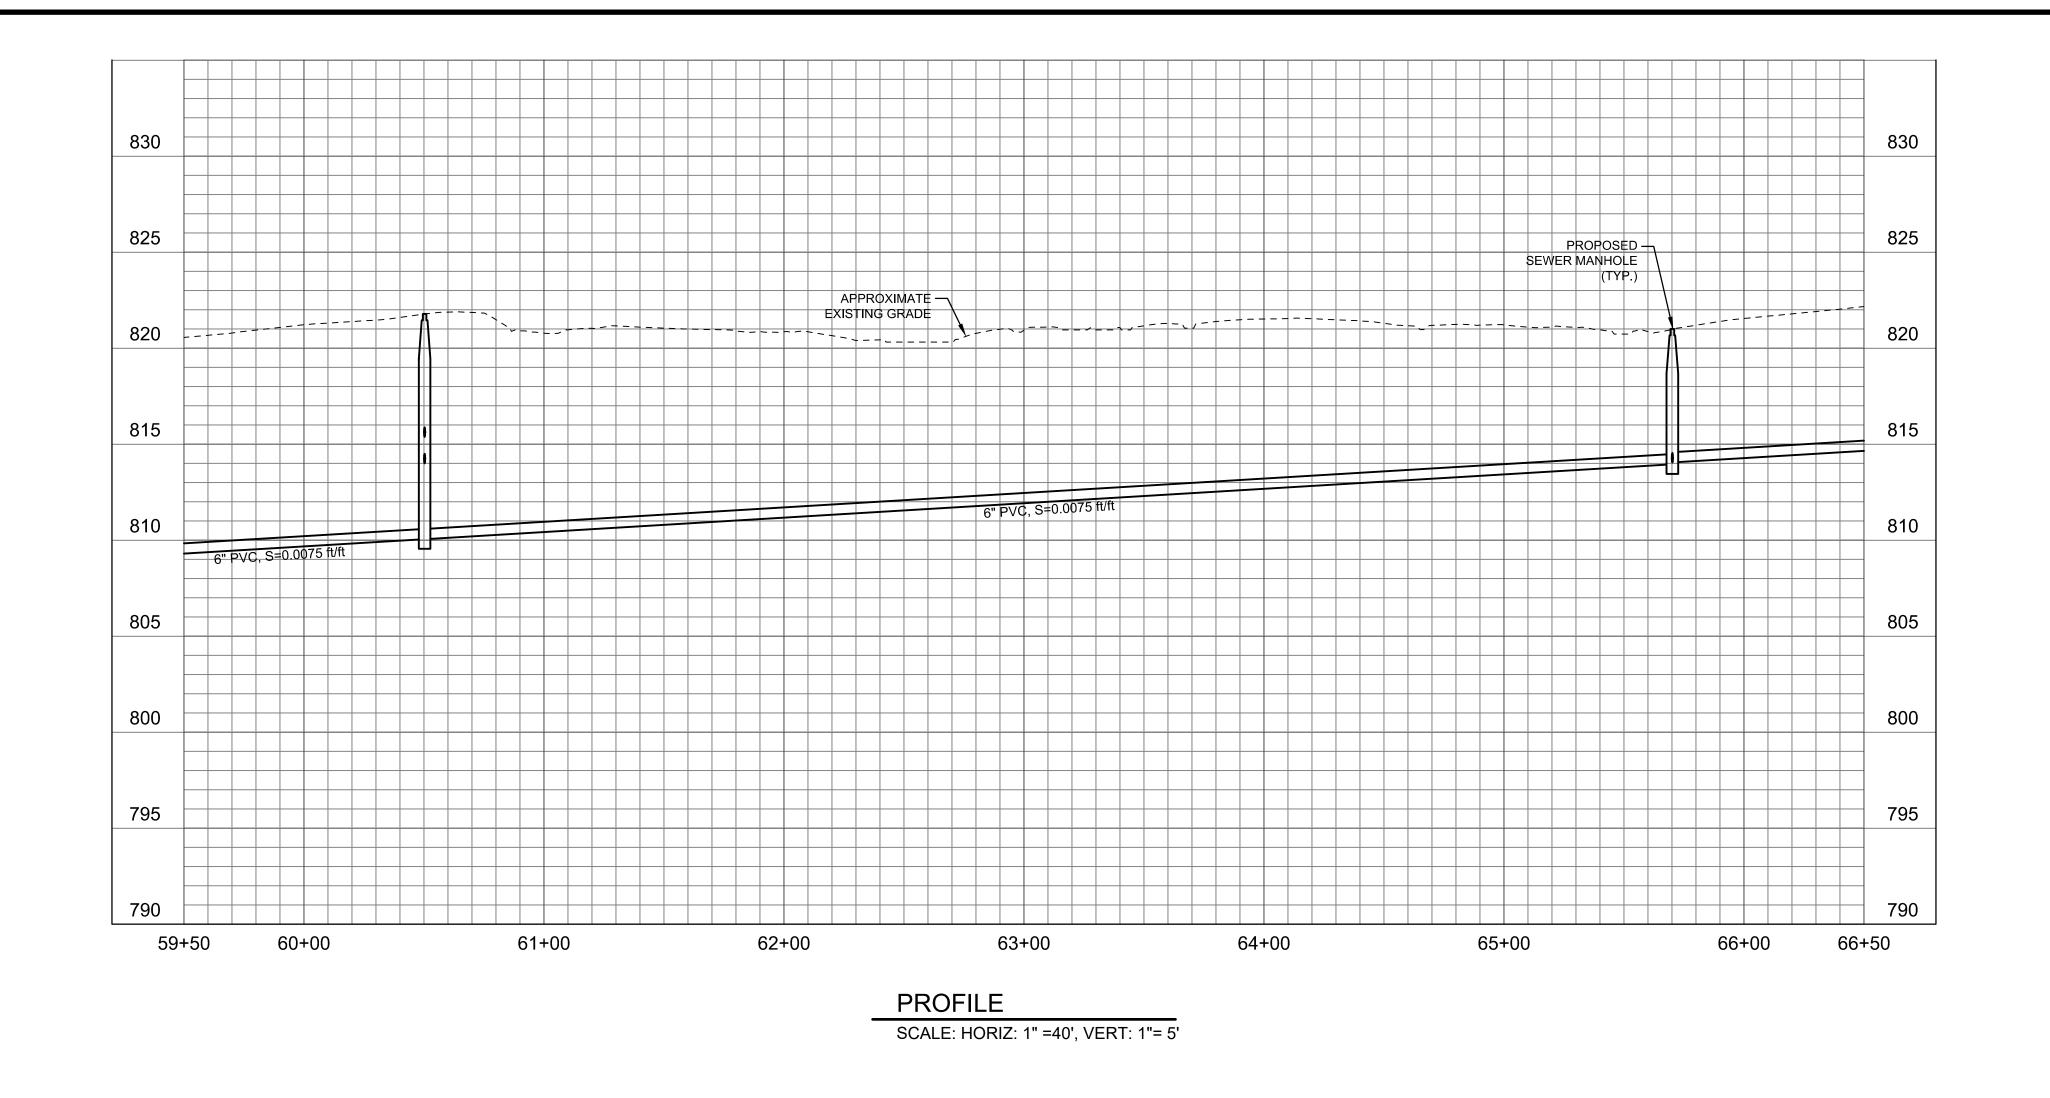

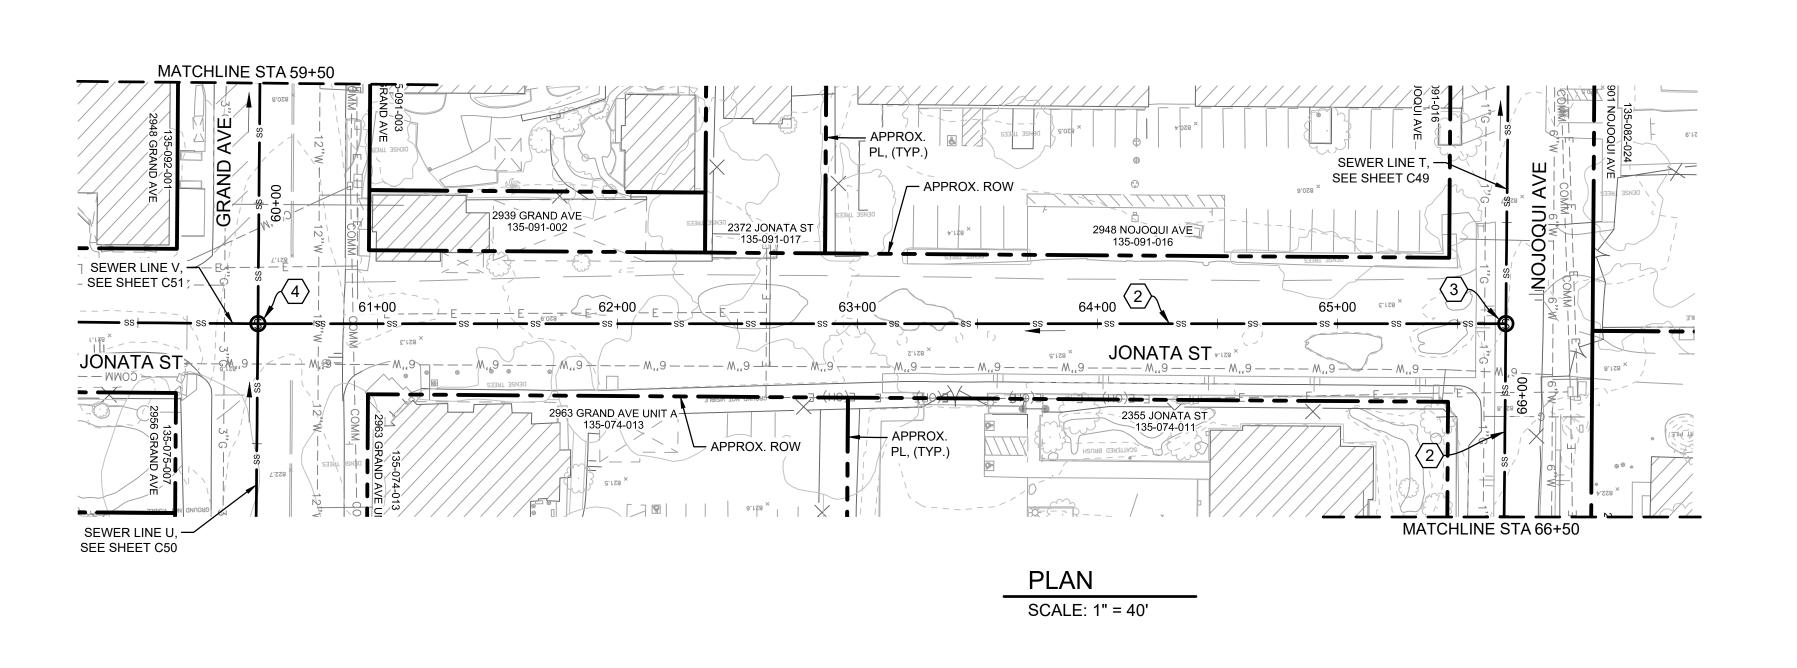


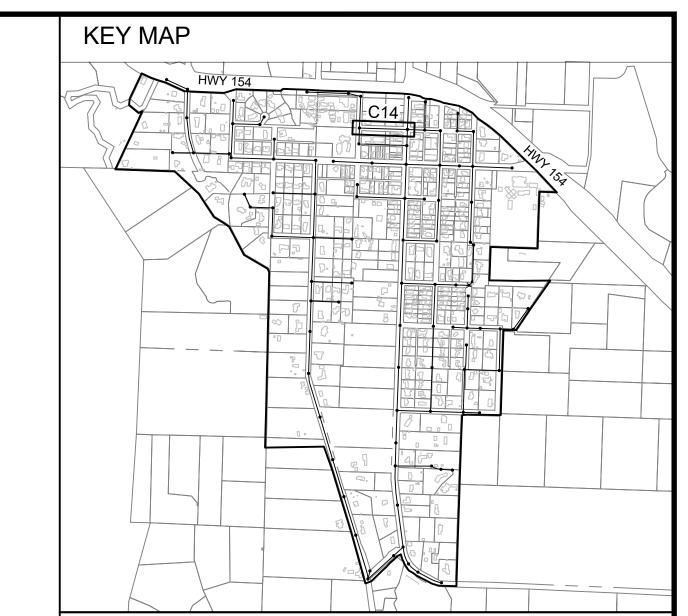

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- $\langle 1 \rangle$  CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\overline{\langle 2 \rangle}$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- $\overline{\langle 4 \rangle}$  CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
VО.	DATE	REVISIONS	DATE:	06/28/2022



WARNING

IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS

NOT TO SCALE

LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441


LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE B PLAN AND PROFILE STA 59+50 TO STA 66+50 GRAND AVE. - JONATA ST. - NOJOQUI AVE. PROJECT NO.

184031368


DWG NO. C14

SHT. 16 OF 54

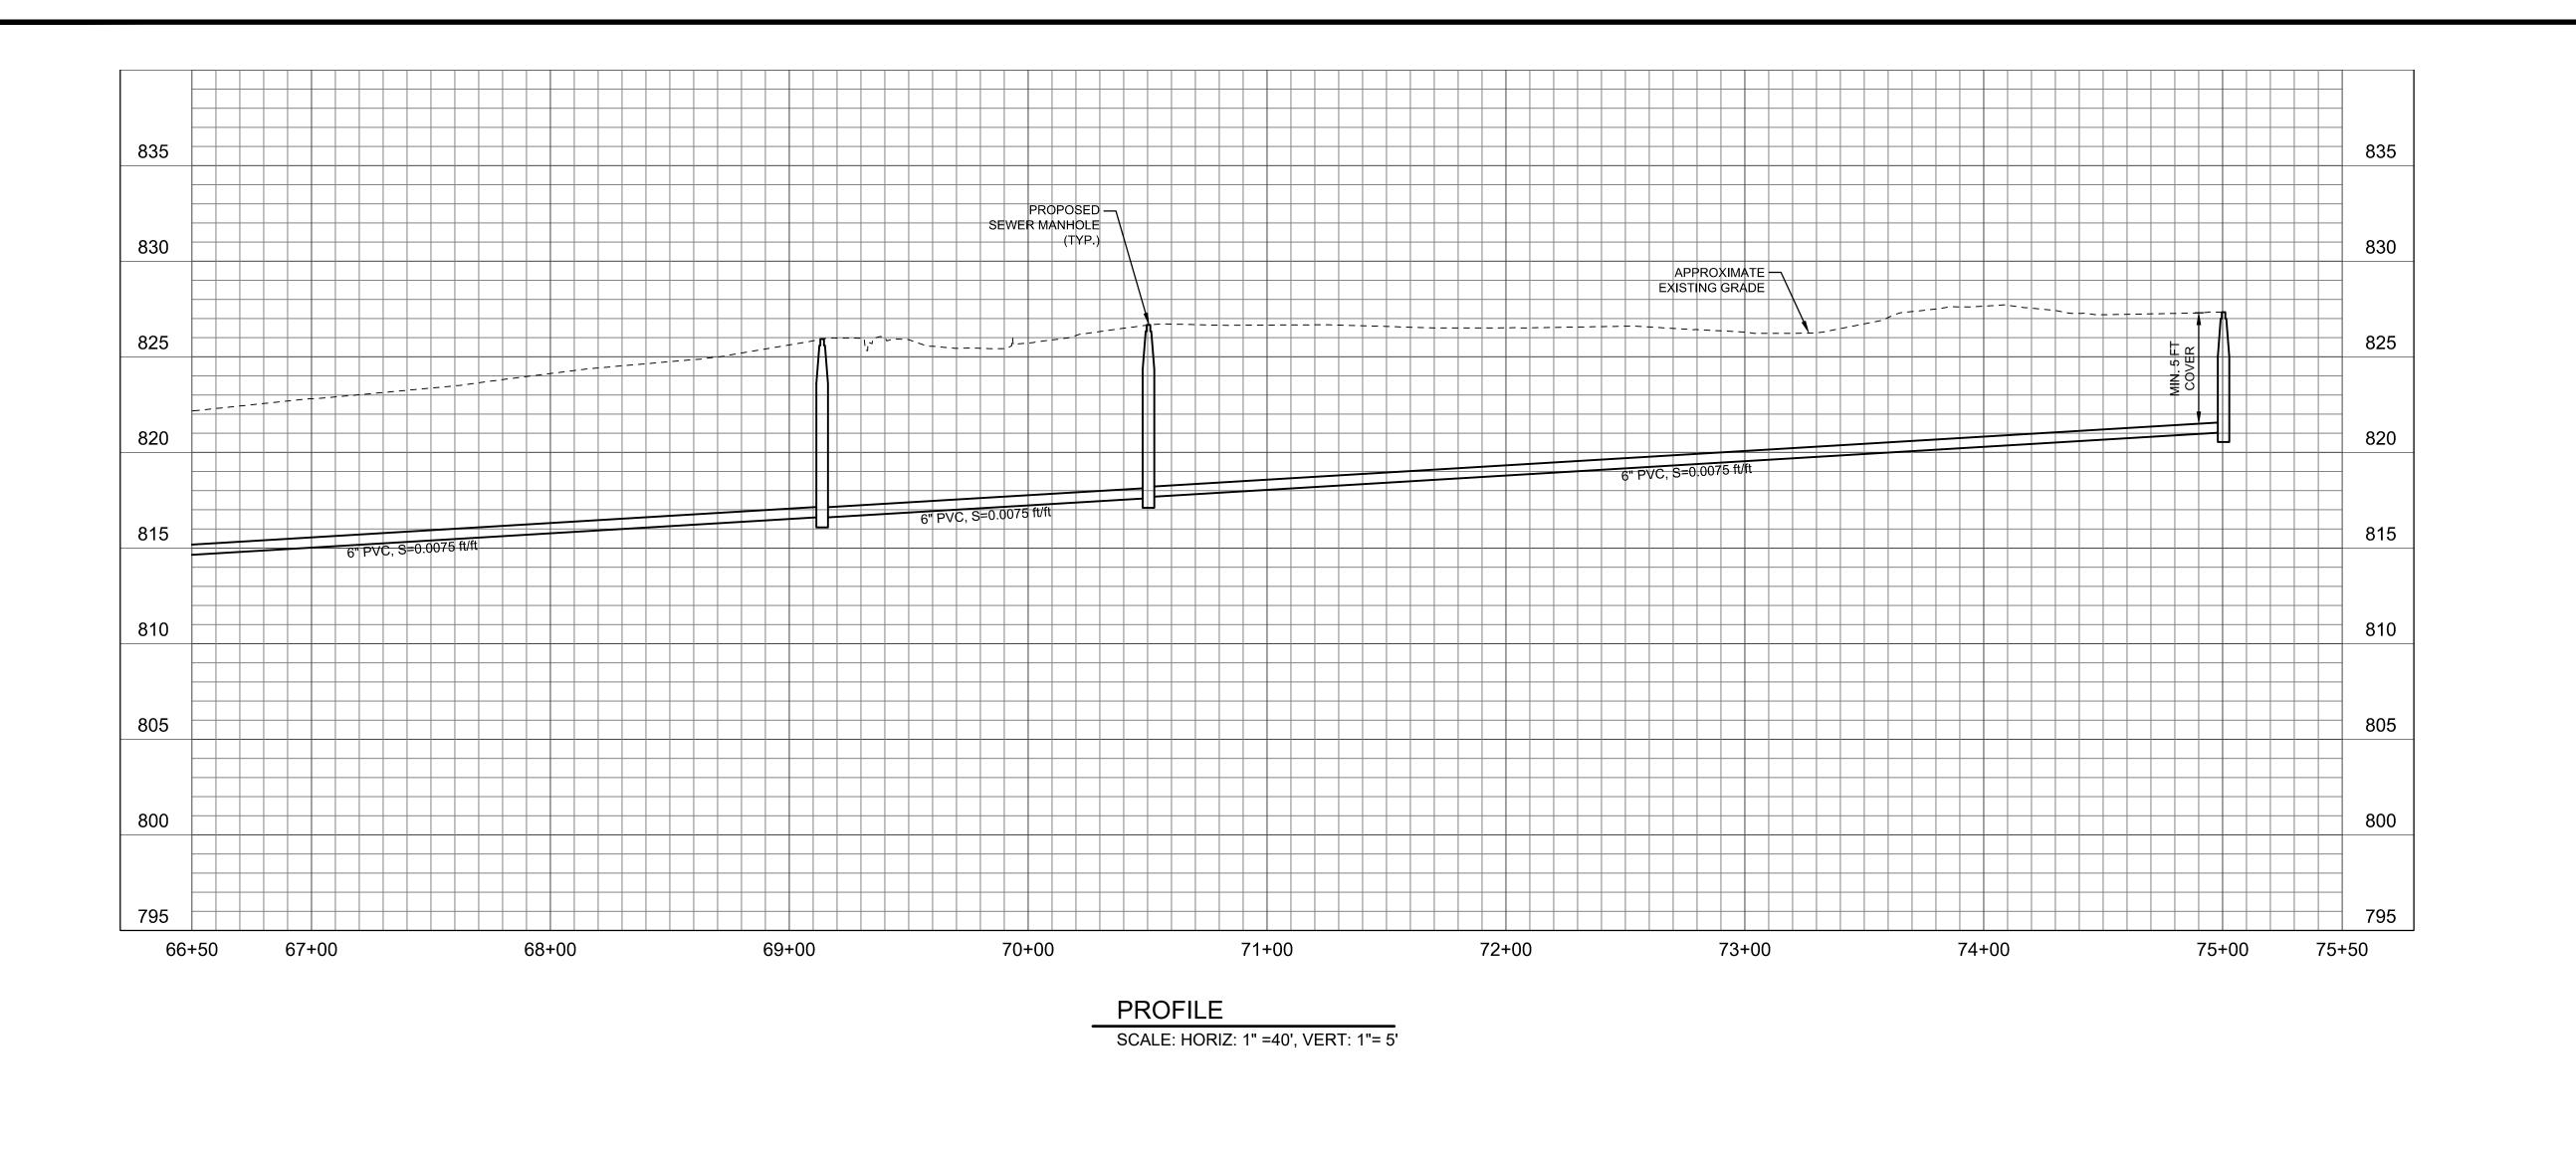

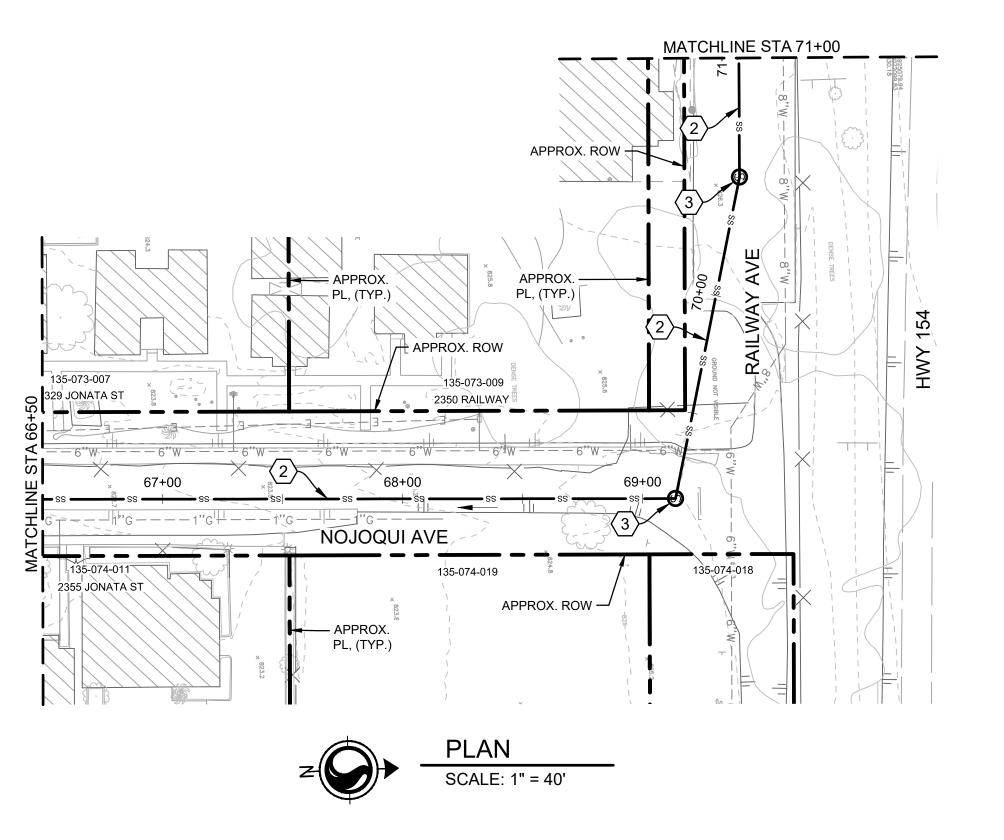

30% SUBMITTAL

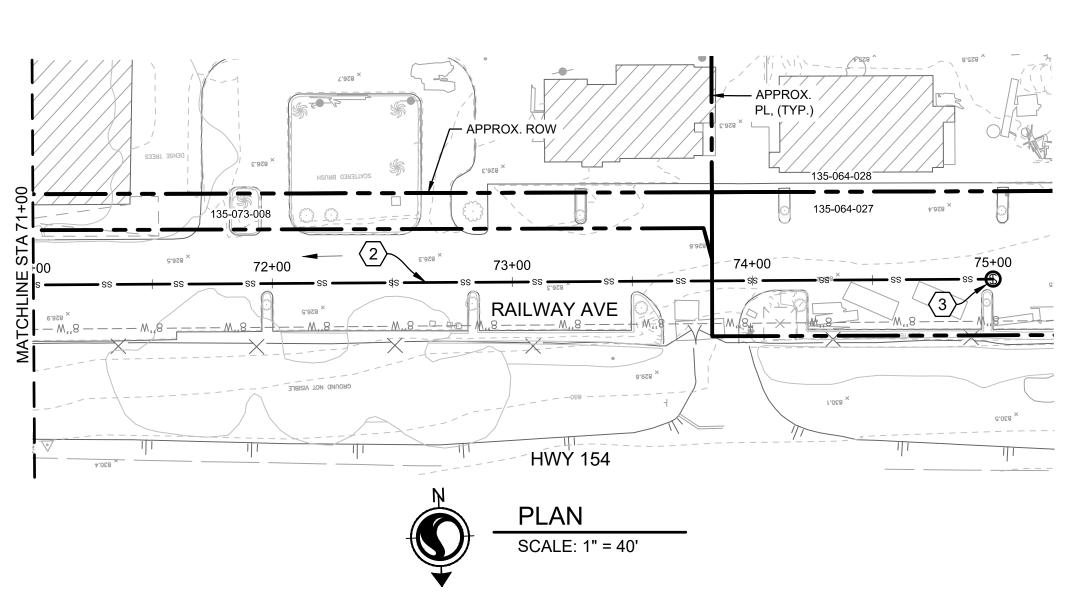

DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE B PLAN AND PROFILE STA 66+50 TO STA 75+00 NOJOQUI AVE. - RAILWAY AVE.

1"=40'-0"

**KEY MAP** 

**GENERAL SHEET NOTES** 

AND WERE NOT SURVEYED.

SHEET CONSTRUCTION NOTES

A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE

TO THE ATTENTION OF THE ENGINEER.

APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA

AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT

B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND

C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE

PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.

D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE

 $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.

 $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.

4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.

 $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.

6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

(3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.


ARE SUBJECT TO CHANGE DURING FINAL DESIGN.

PROJECT NO.

184031368


DWG NO. C15

DWG NO. C15
SHT. 17 OF 54

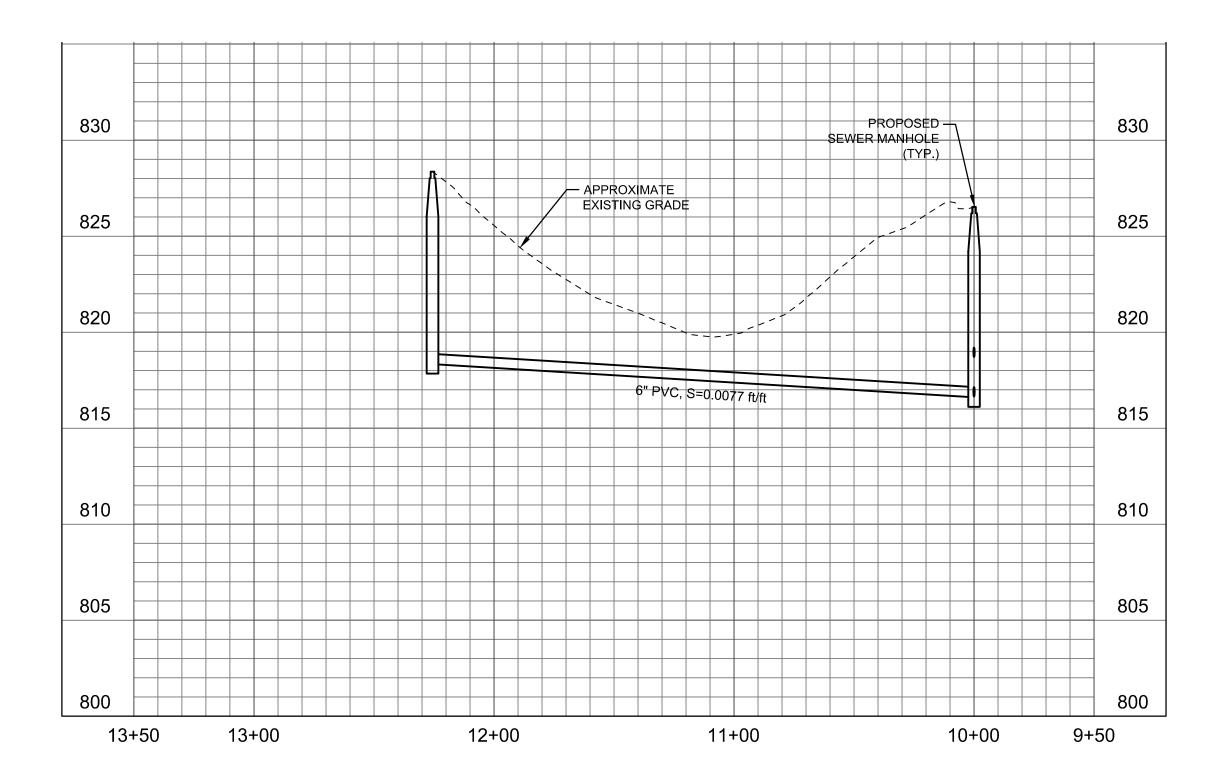

PROFILE

SCALE: HORIZ: 1" =40', VERT: 1"= 5'

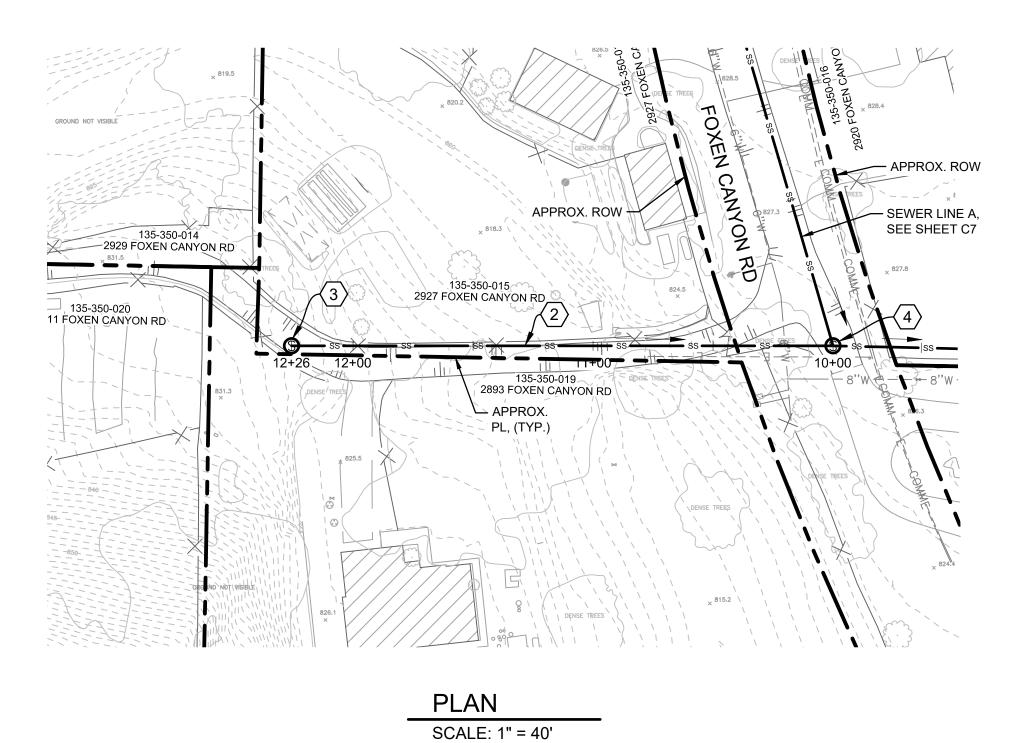


### 

### GENERAL SHEET NOTES

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- igg(1igg) CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\overline{\langle 2 \rangle}$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- 5 CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ	
			DRAFTED BY:	VH	0
			CHECKED BY:	ALG/ GA	IF 1
ΝО.	DATE	REVISIONS	DATE:	06/28/2022	THE N




LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441


LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE JOTO PLAN AND PROFILE STA 10+00 TO STA 12+26 DRIVEWAY FROM FOXEN CANYON RD.

PROJECT NO. 184031368

DWG NO. C16 SHT. 18 OF 54

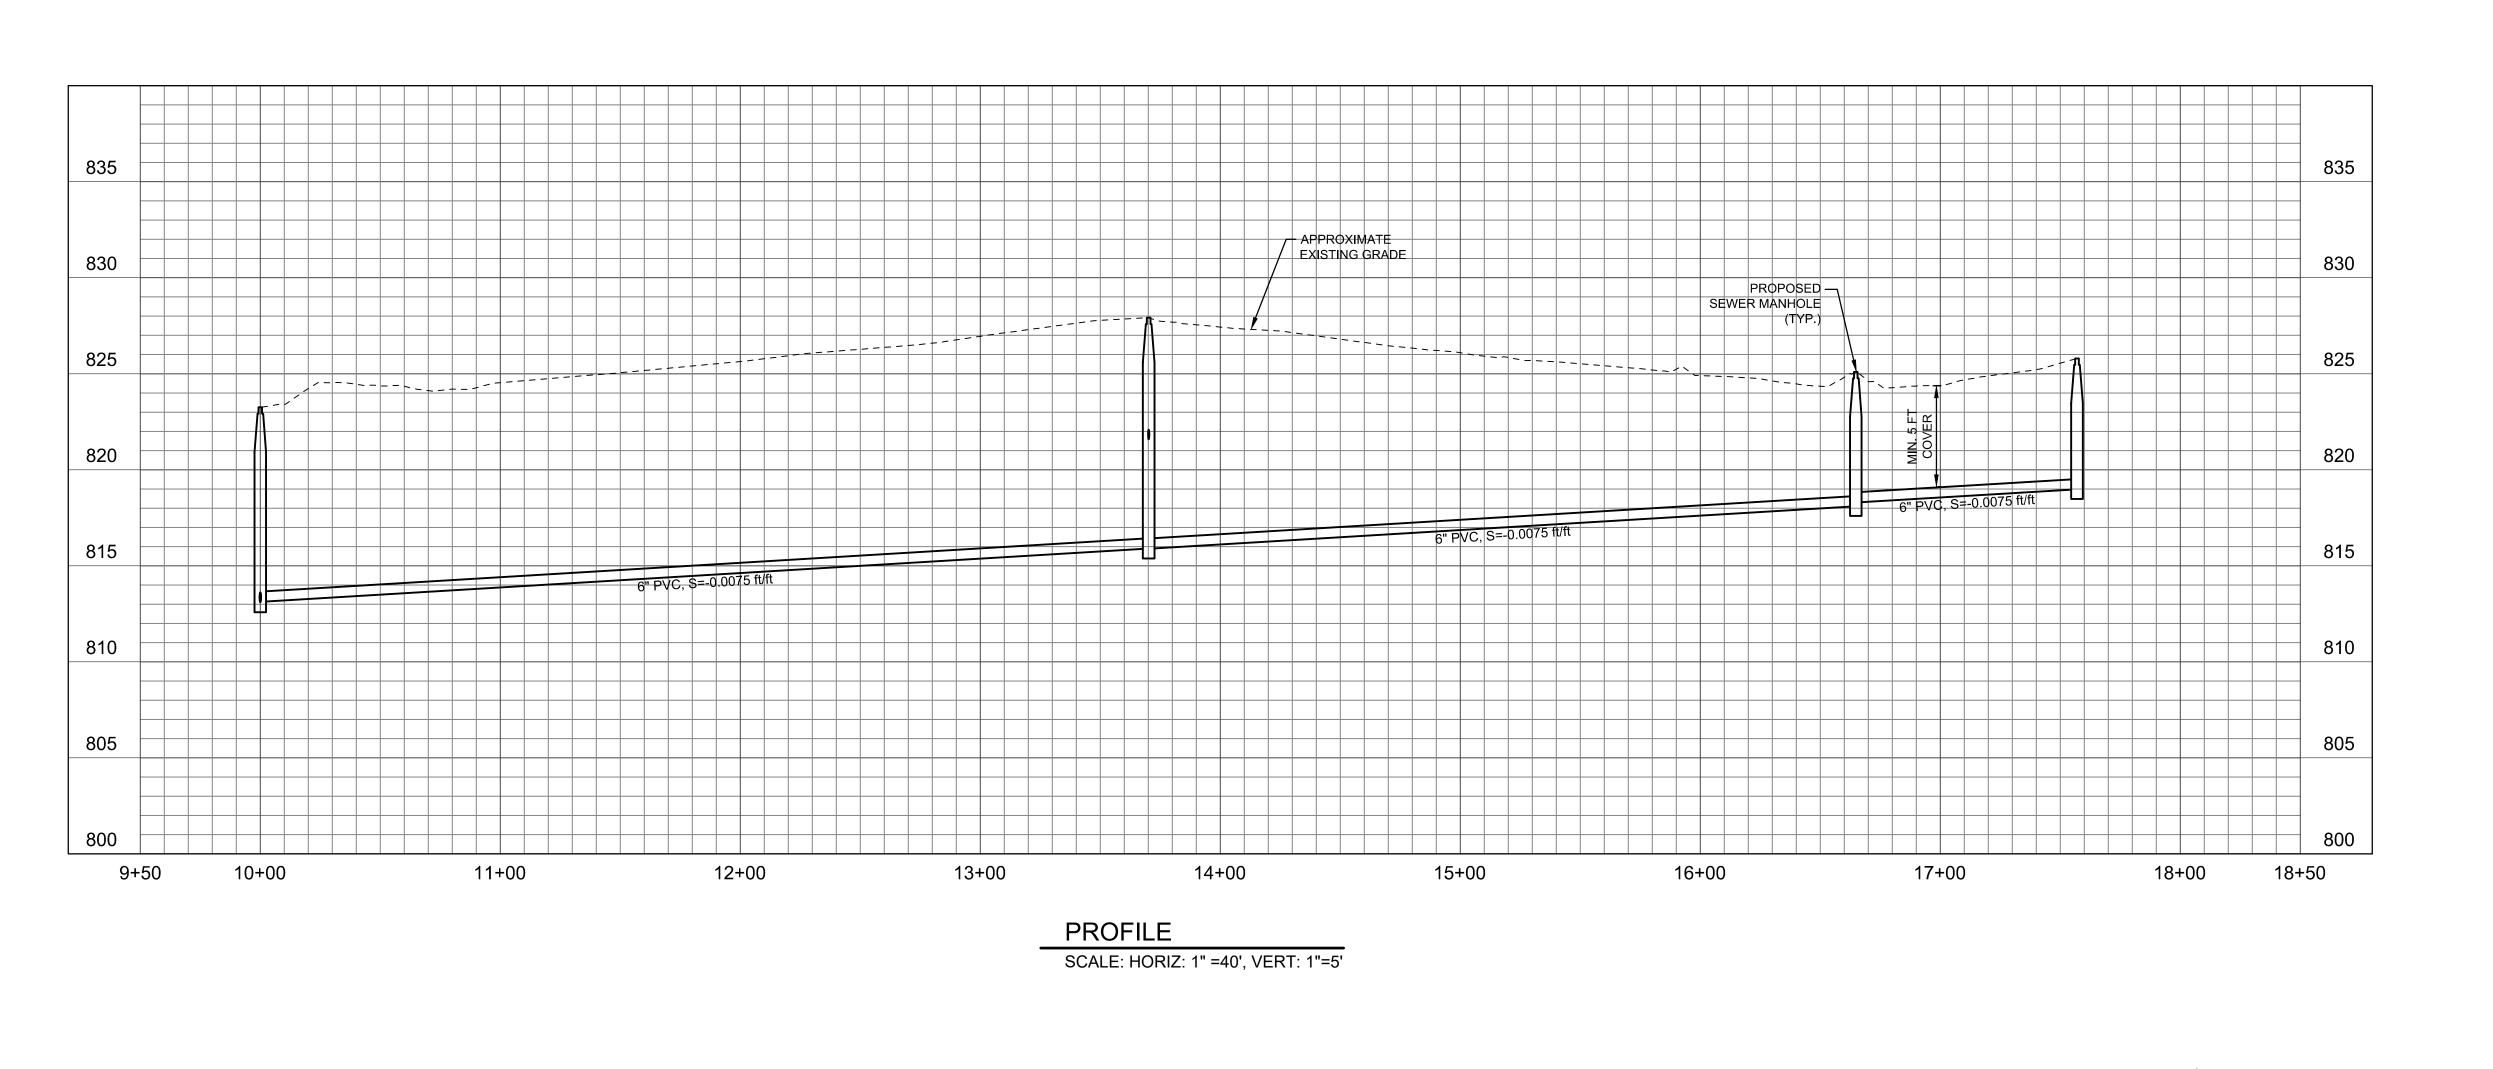

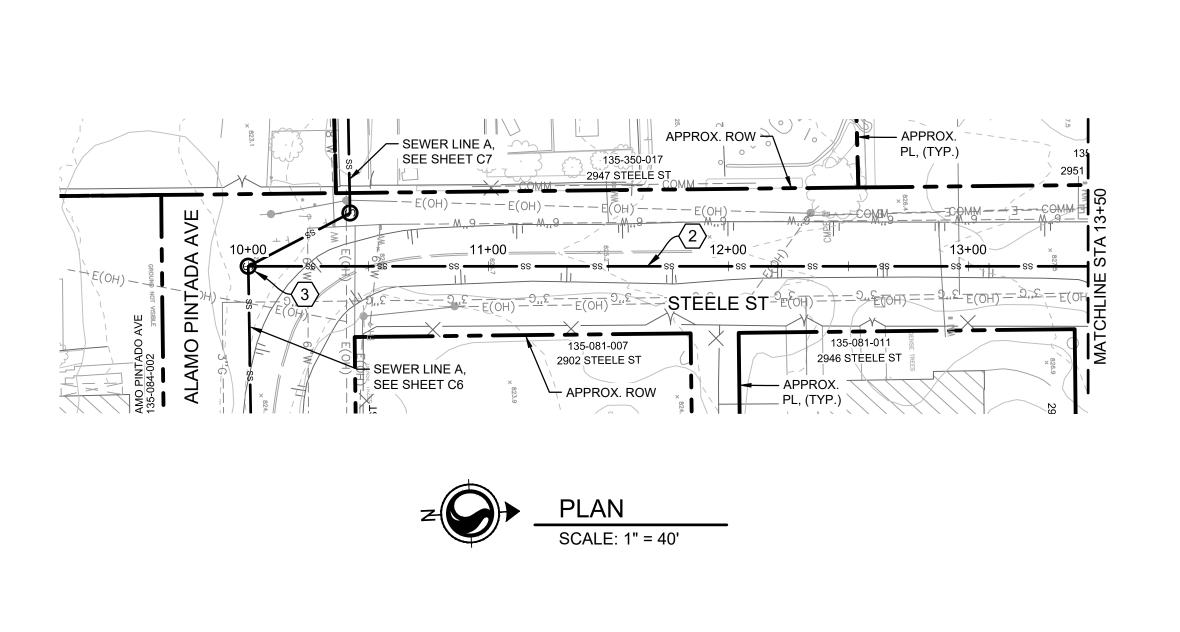

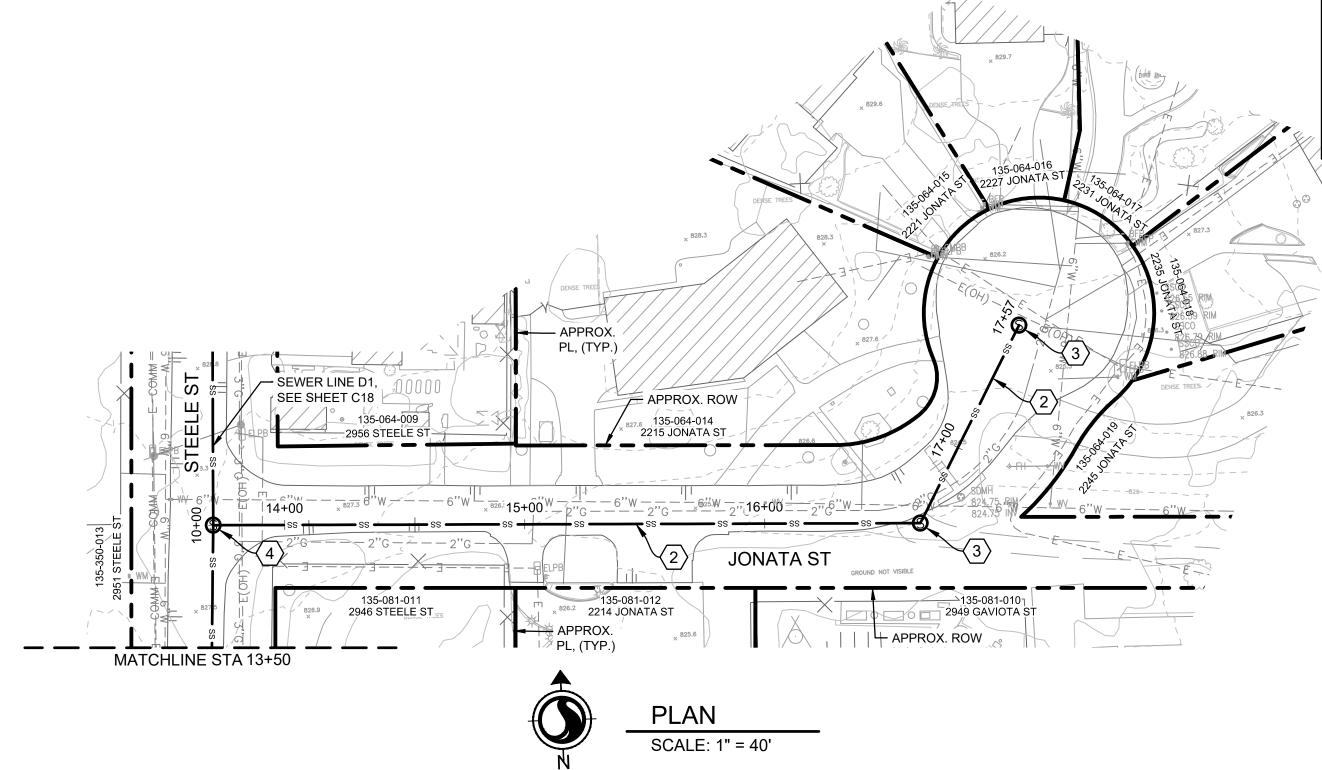

KEY MAP

HWY 154

GOVERNMENT OF THE PROPERTY O

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\bigcirc$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- (4) CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

40 20 0 40' 1"=40'-0"

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
0. Z	DATE	REVISIONS	DATE:	06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

PO Box 345, Los Olivos CA 93441

PLAN AND PRO

STA 10+00 TO ST.


SEWER LINE LOT PLAN AND PROFILE STA 10+00 TO STA 17+57
STEELE ST. - JONATA ST.

PROJECT NO.

184031368


DWG NO. C17


SHT. 19 OF 54

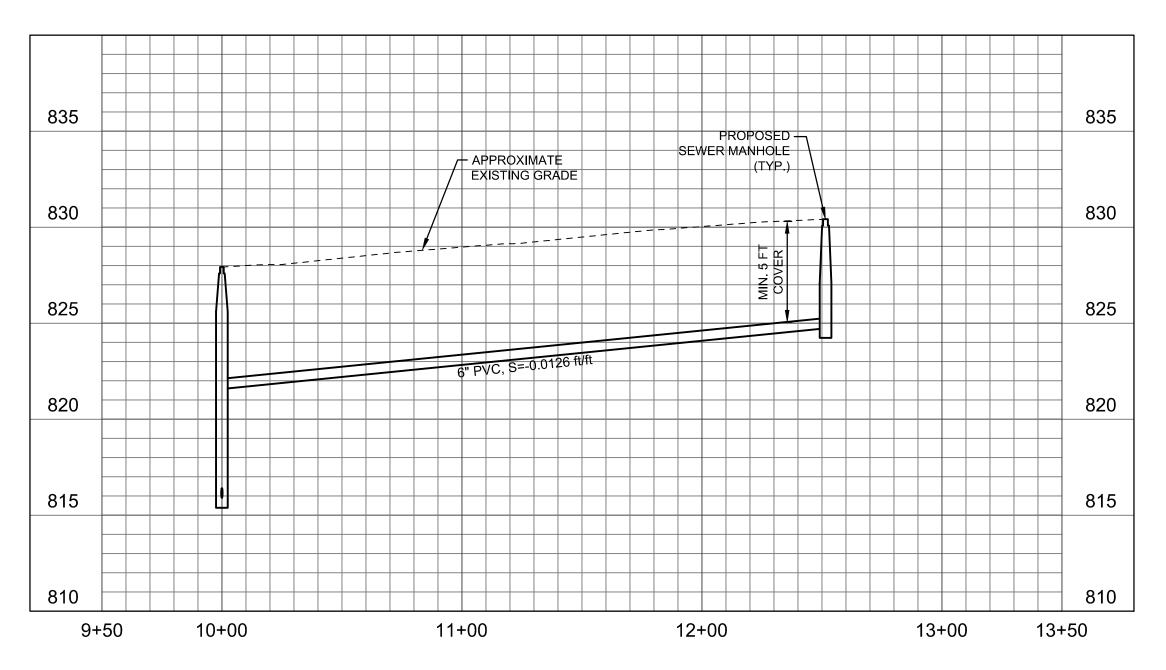

PROFILE

SCALE: HORIZ: 1" =40', VERT: 1"=5'

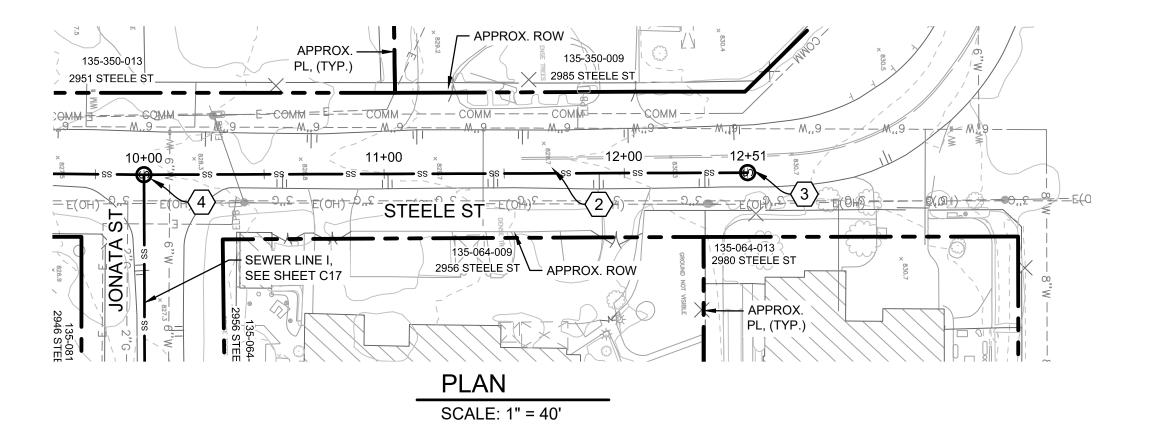

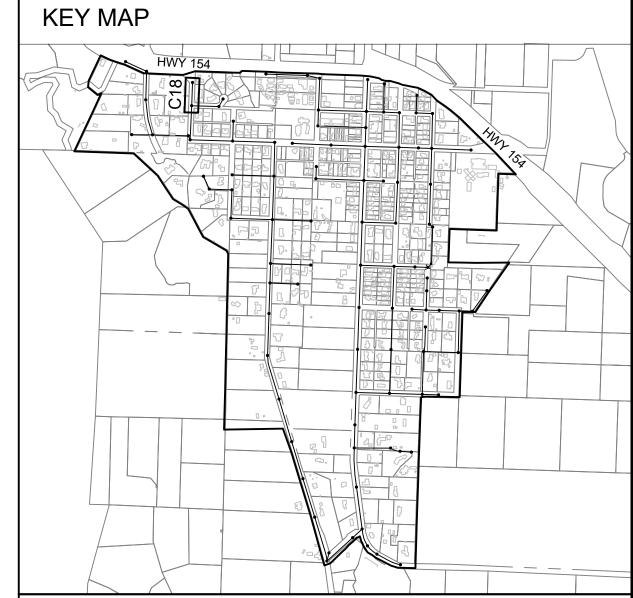

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.


### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 2 CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\overline{\langle 5 \rangle}$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

40 20 0 1"=40'-0"

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
ΝО.	DATE	REVISIONS	DATE:	06/28/2022





LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE D1 PLAN AND PROFILE STA 10+00 TO STA 12+15 STEELE STREET

PROJECT NO.

184031368


DWG NO. C18

SHT. 20 OF 54

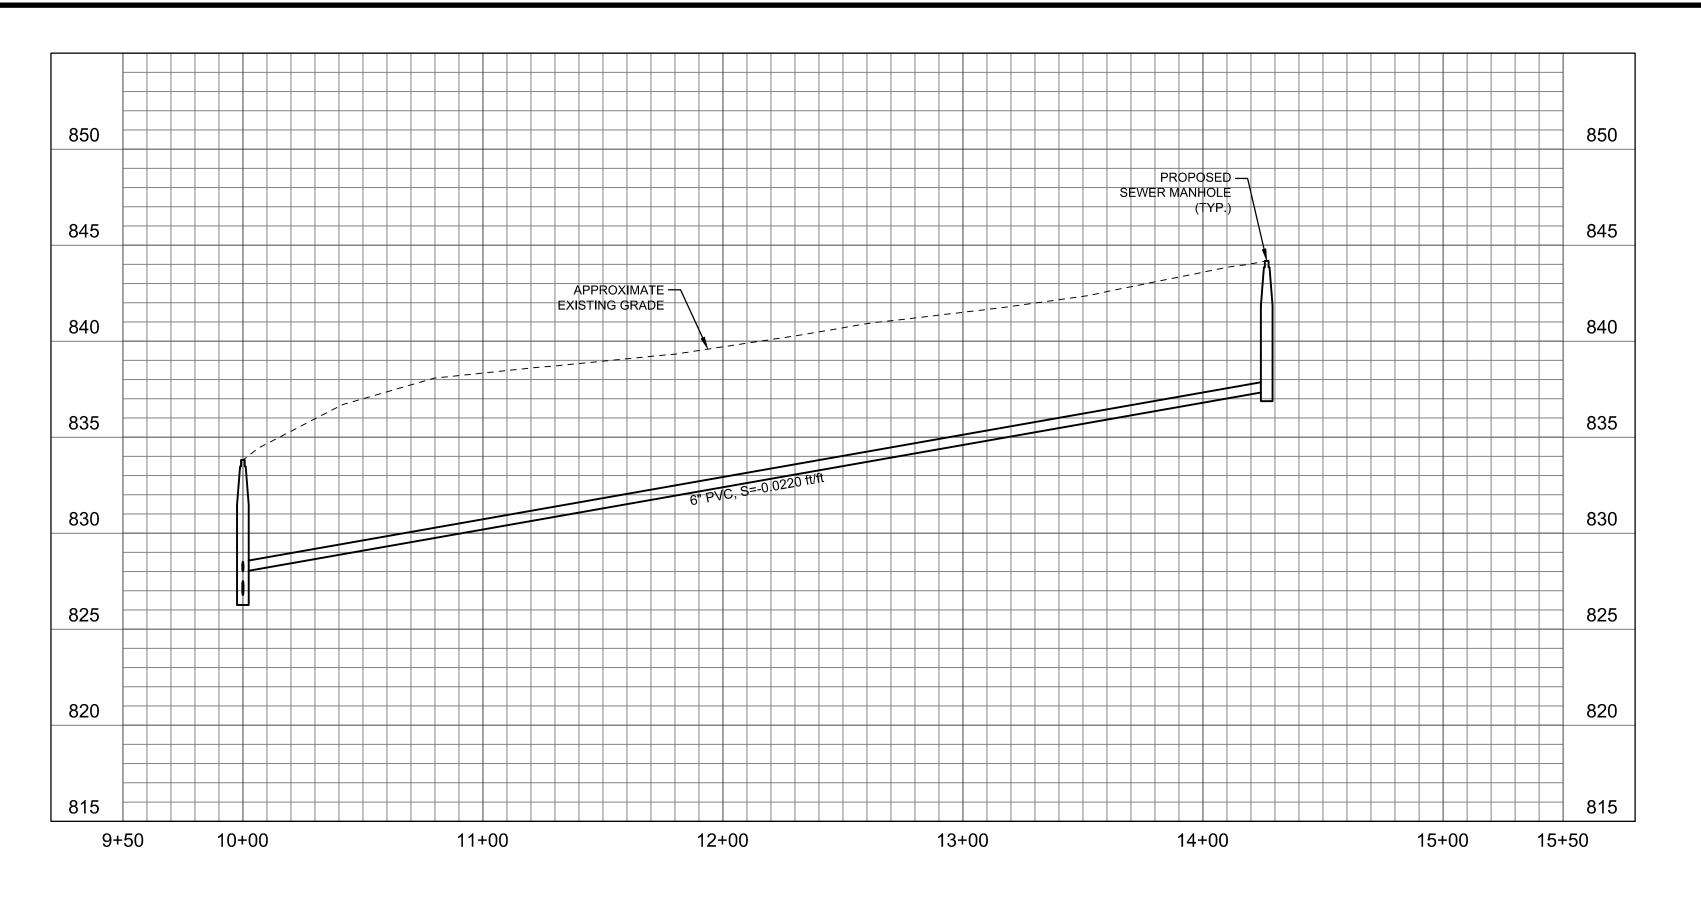

PROFILE

SCALE: HORIZ: 1" =40', VERT: 1"= 5'

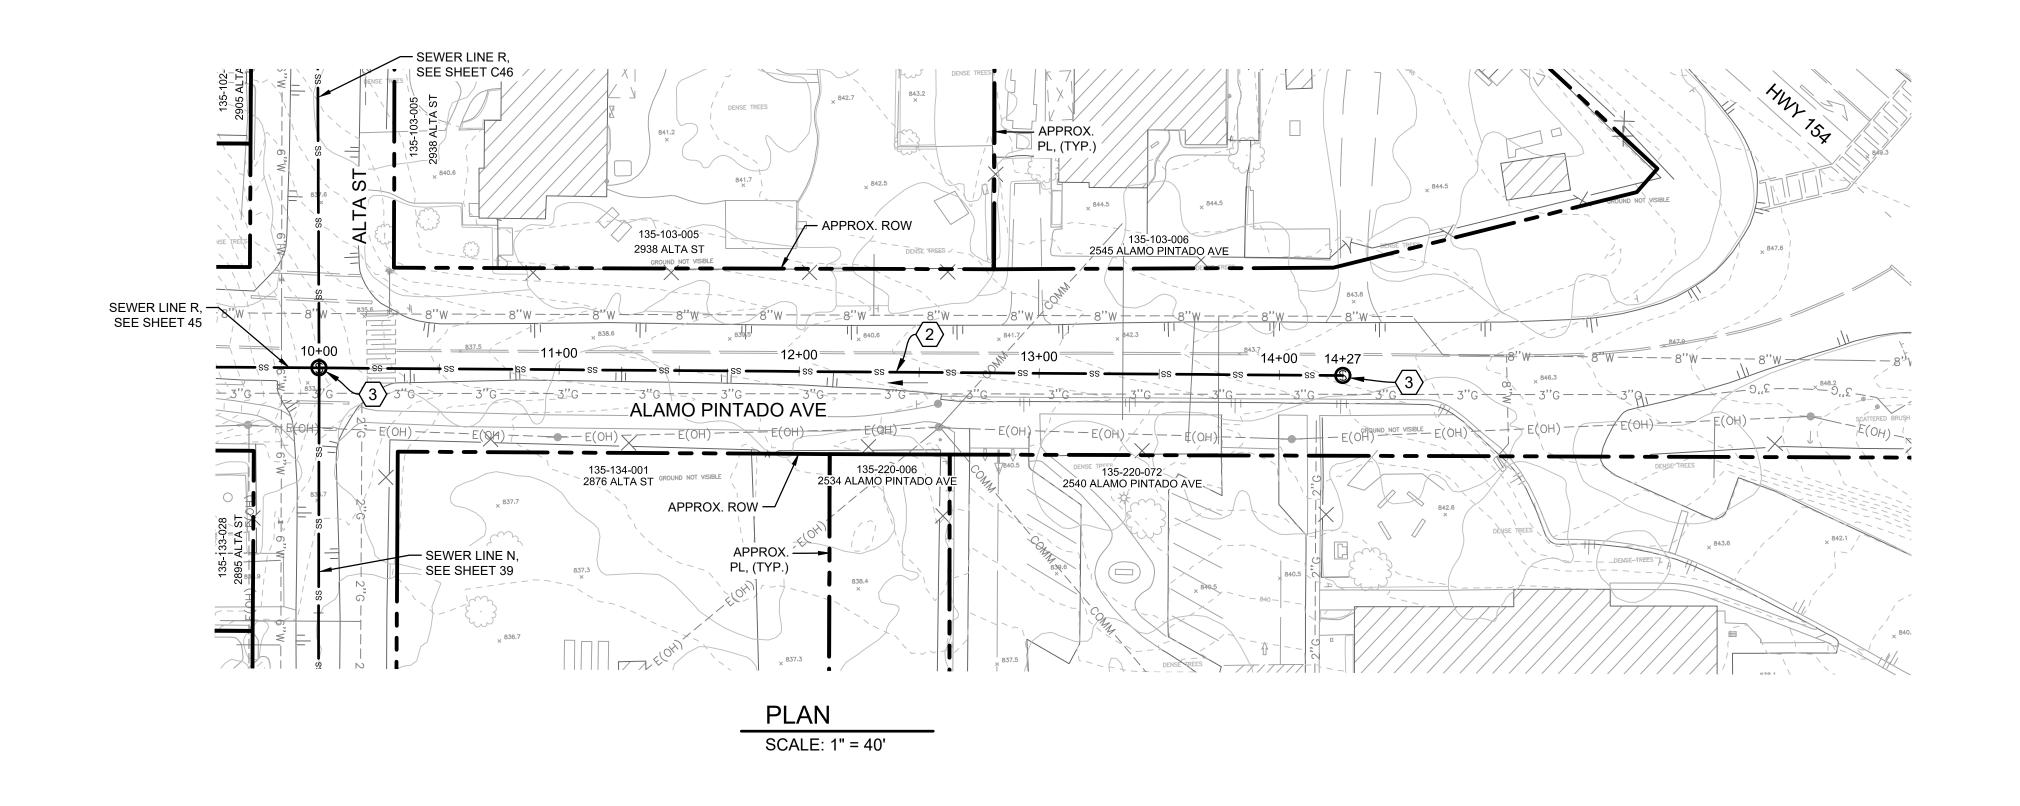


# 

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- (5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DESIGNED BI:	OLI / JIZ
			DRAFTED BY:	VH
			DRAFIED DI:	VII
			CHECKED BY:	ALG/ GA
NO.	DATE	REVISIONS	DATE:	06/28/2022

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE





LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE B1 PLAN AND PROFILE STA 10+00 TO STA 14+27 ALAMO PINTADO AVE. PROJECT NO. 184031368

DWG NO. C19
SHT. 21 OF 54

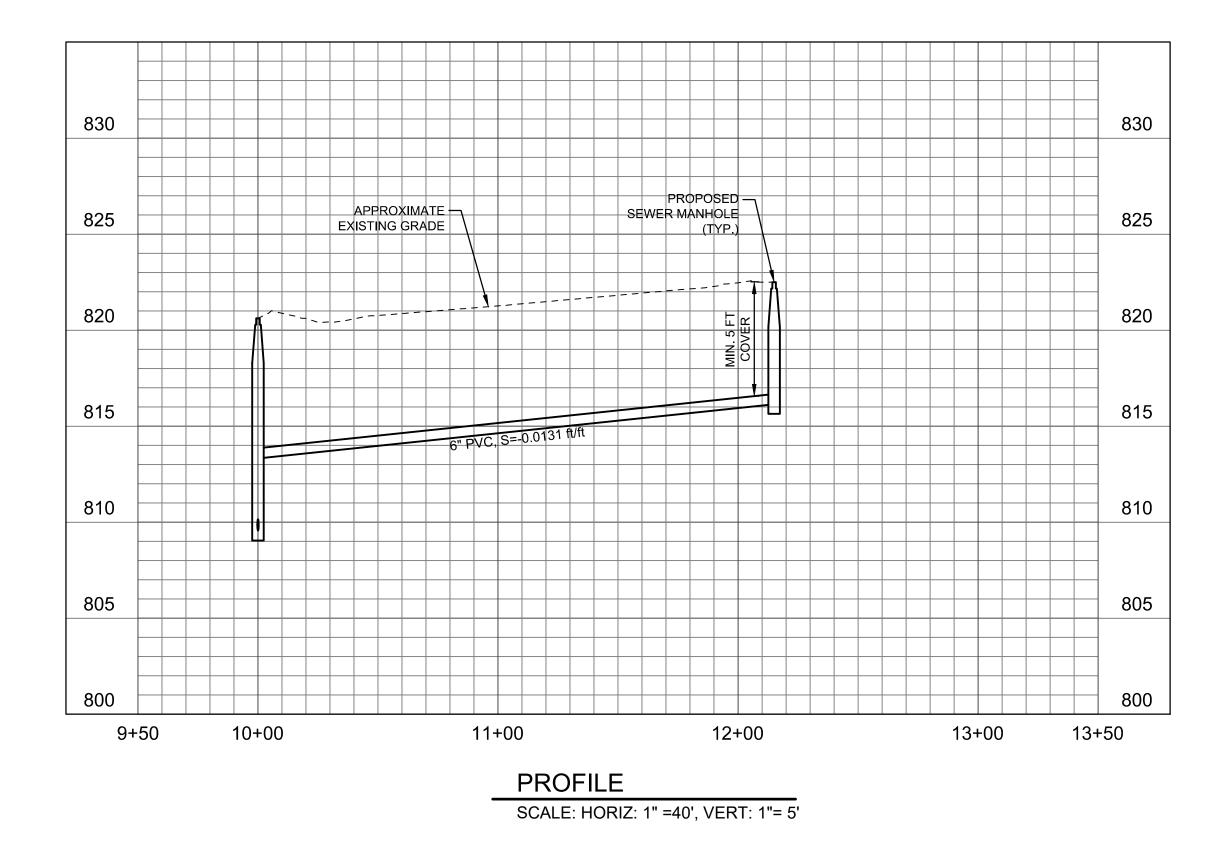

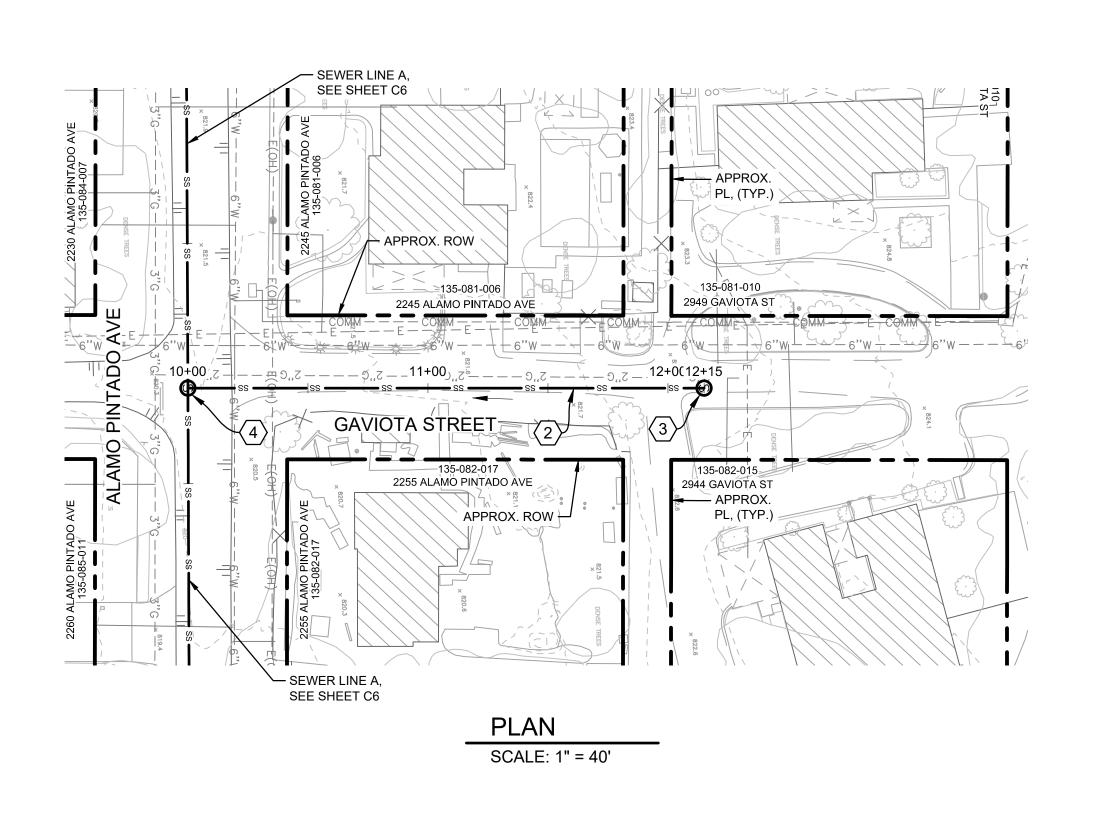

## KEY MAP

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 2 CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- 5 CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

20 0

40 20 0 40' 1"=40'-0"

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ	
			DRAFTED BY:	VH	0
			CHECKED BY:	ALG/ GA	IF NO
O.	DATE	REVISIONS	DATE:	06/28/2022	N



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE HOTPLAN AND PROFILE

STA 10+00 TO STA 12+15

GAVIOTA STREET


PROJECT NO. 184031368


DWG NO. C20
SHT. 22 OF 54

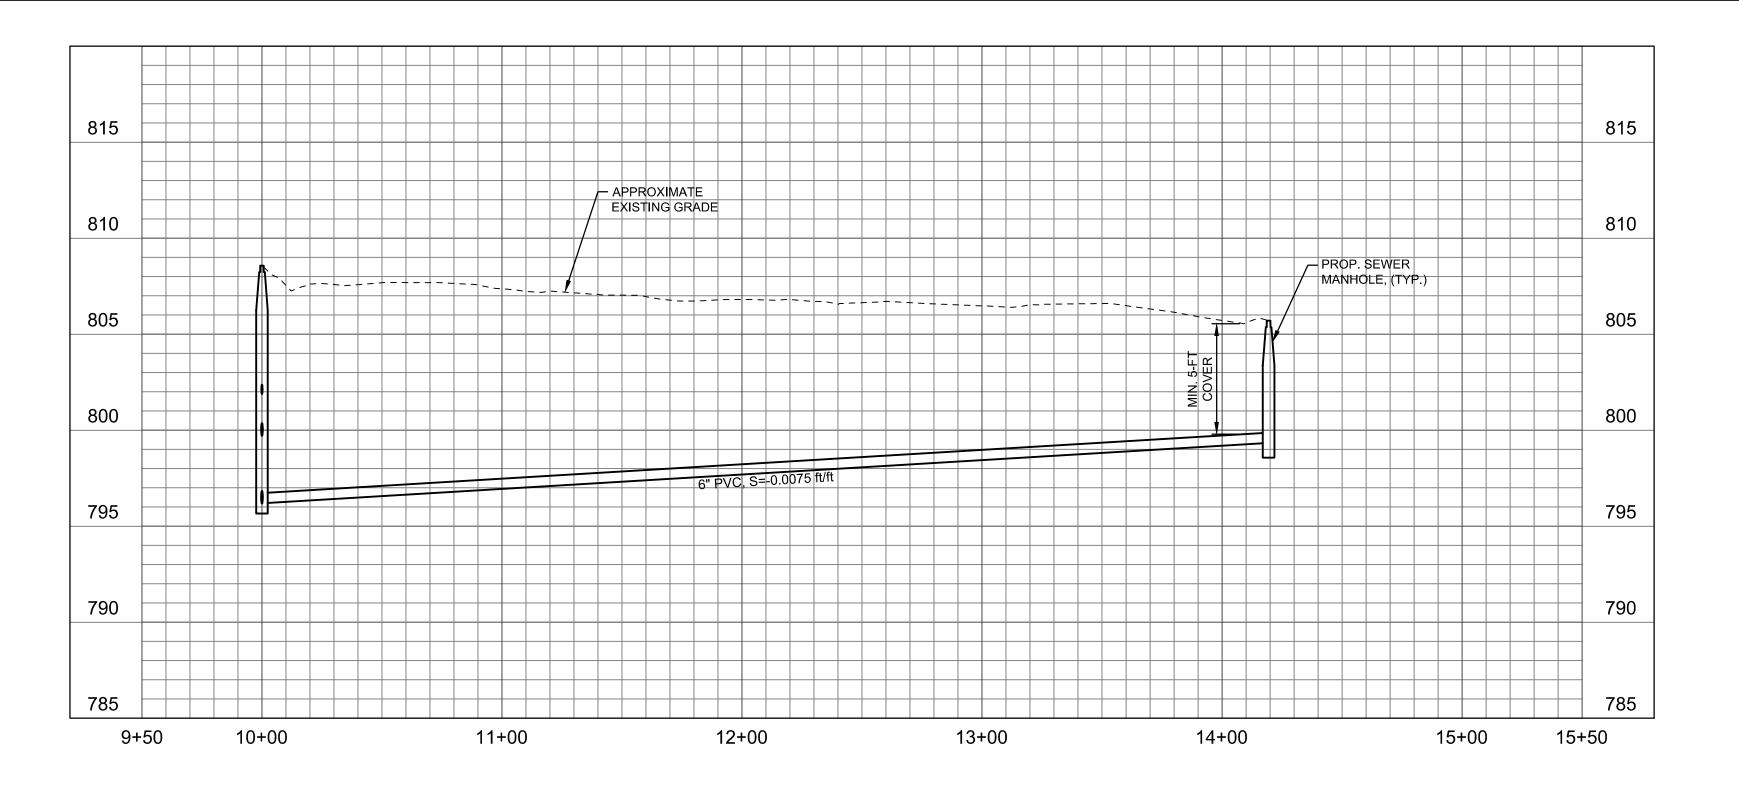

PROFILE

SCALE: HORIZ: 1" =40', VERT: 1"=5'

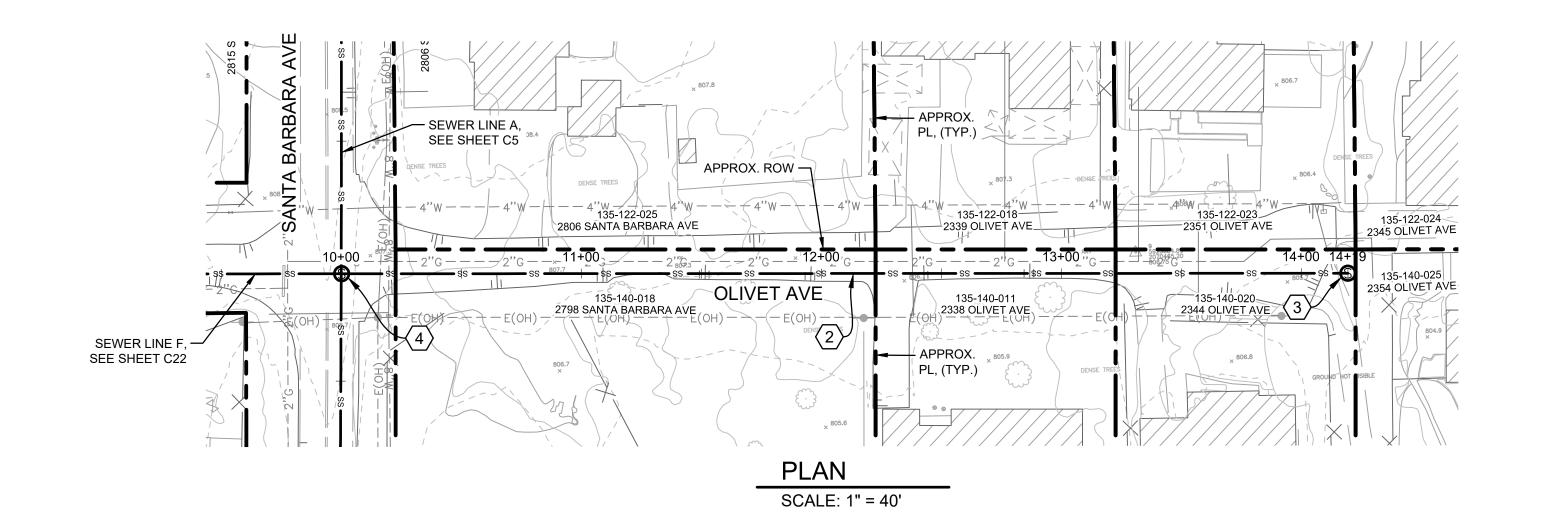

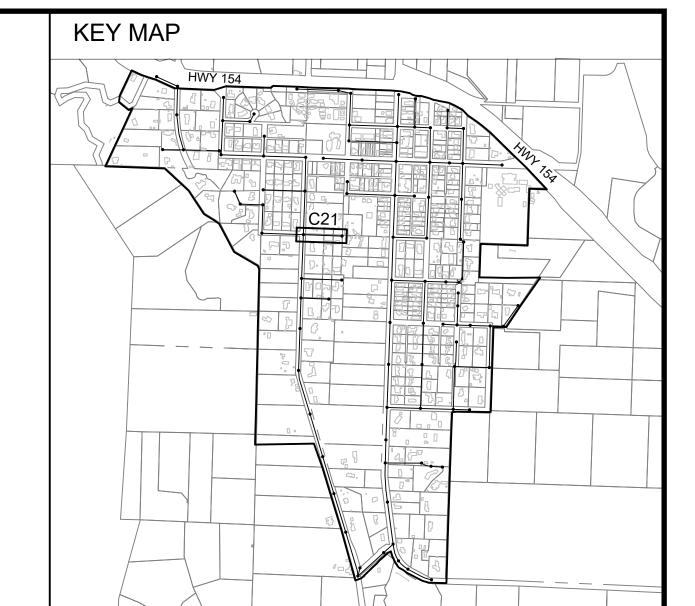

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- $igl \langle 1 igr 
  angle$  CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\overline{\langle 2 \rangle}$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- (4) CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

40 20 0 1"=40'-0"

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DESIGNED BI:	OLI / JIZ
			DRAFTED BY:	VH
			DRAFIED DI:	VII
			CHECKED BY:	ALG/ GA
NO.	DATE	REVISIONS	DATE:	06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE E
PLAN AND PROFILE
STA 10+00 TO STA 14+19
OLIVET AVENUE


PROJECT NO.

184031368

DWG NO C21

DWG NO. <u>C21</u> SHT. <u>23</u> OF <u>54</u>

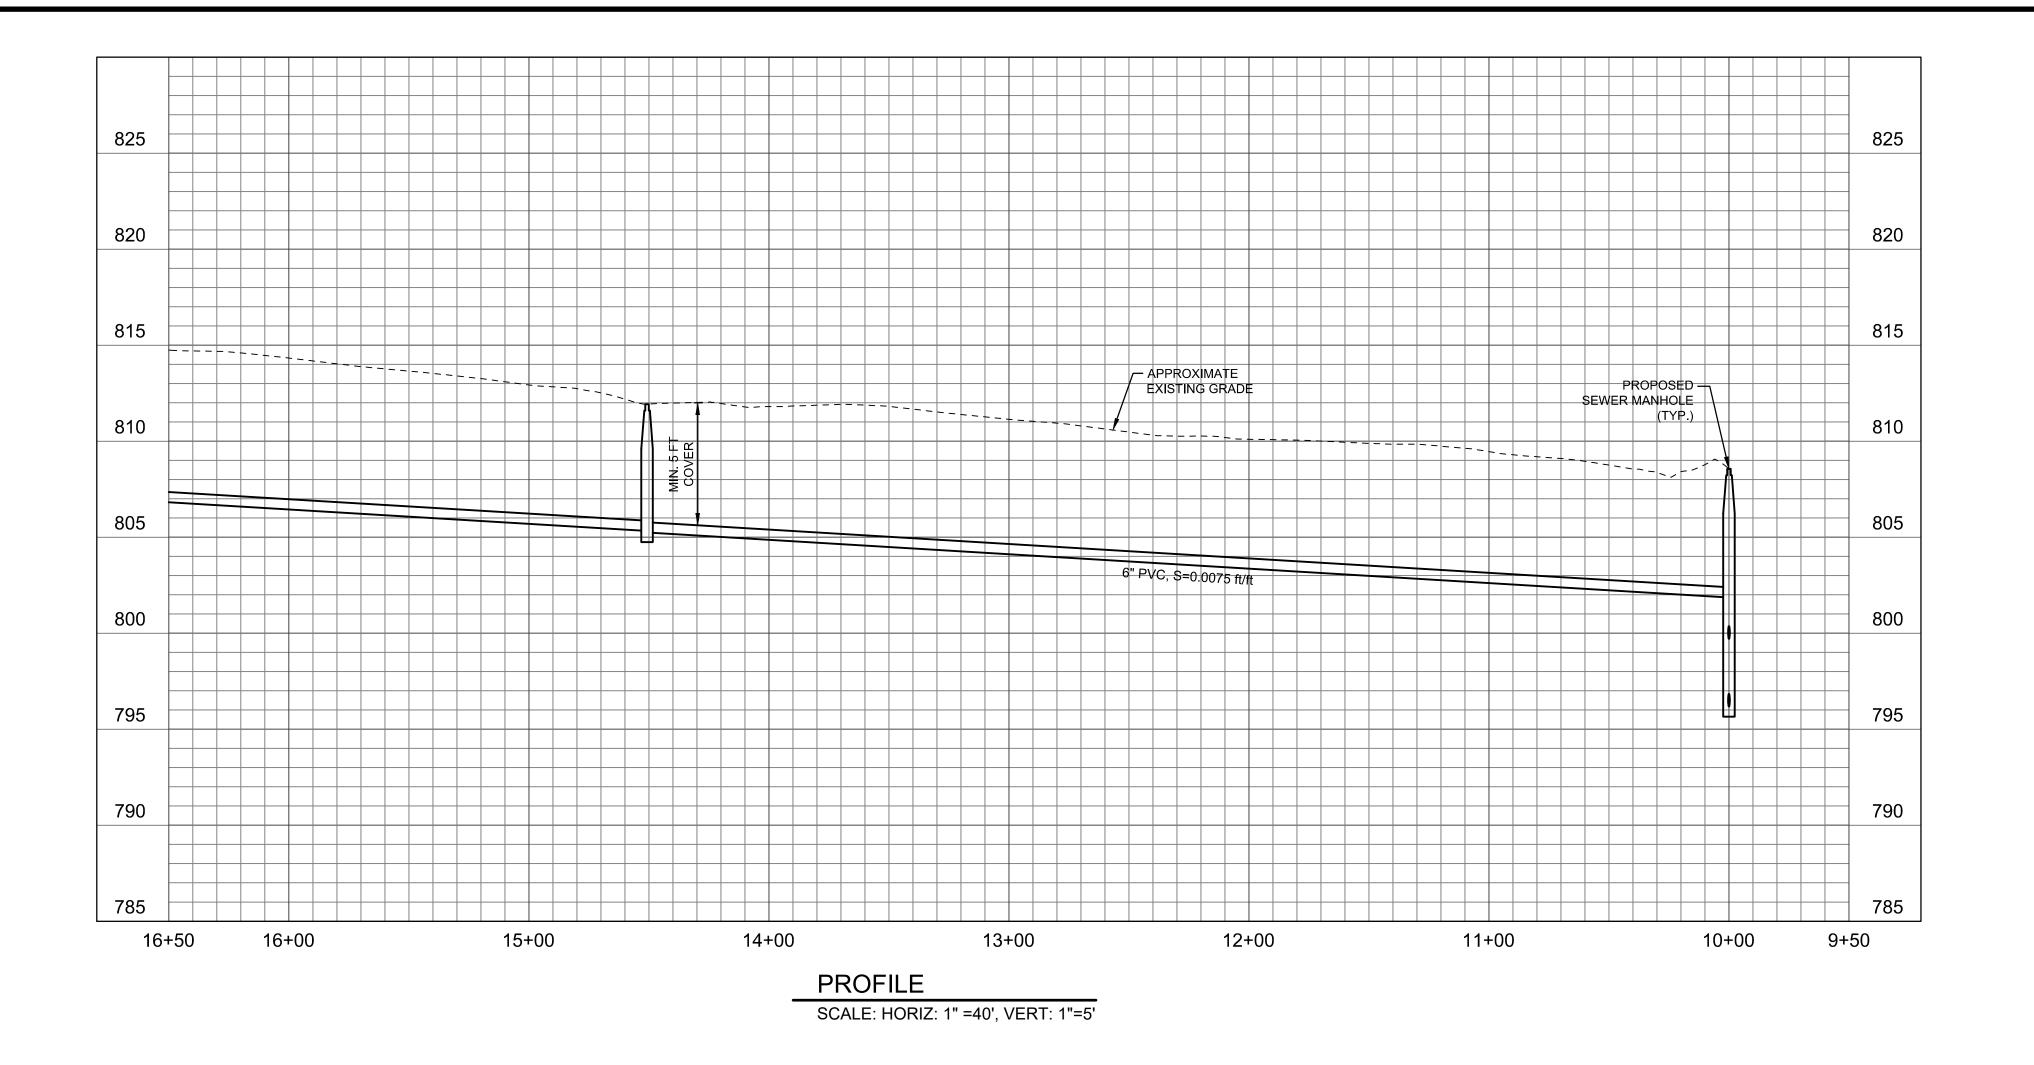

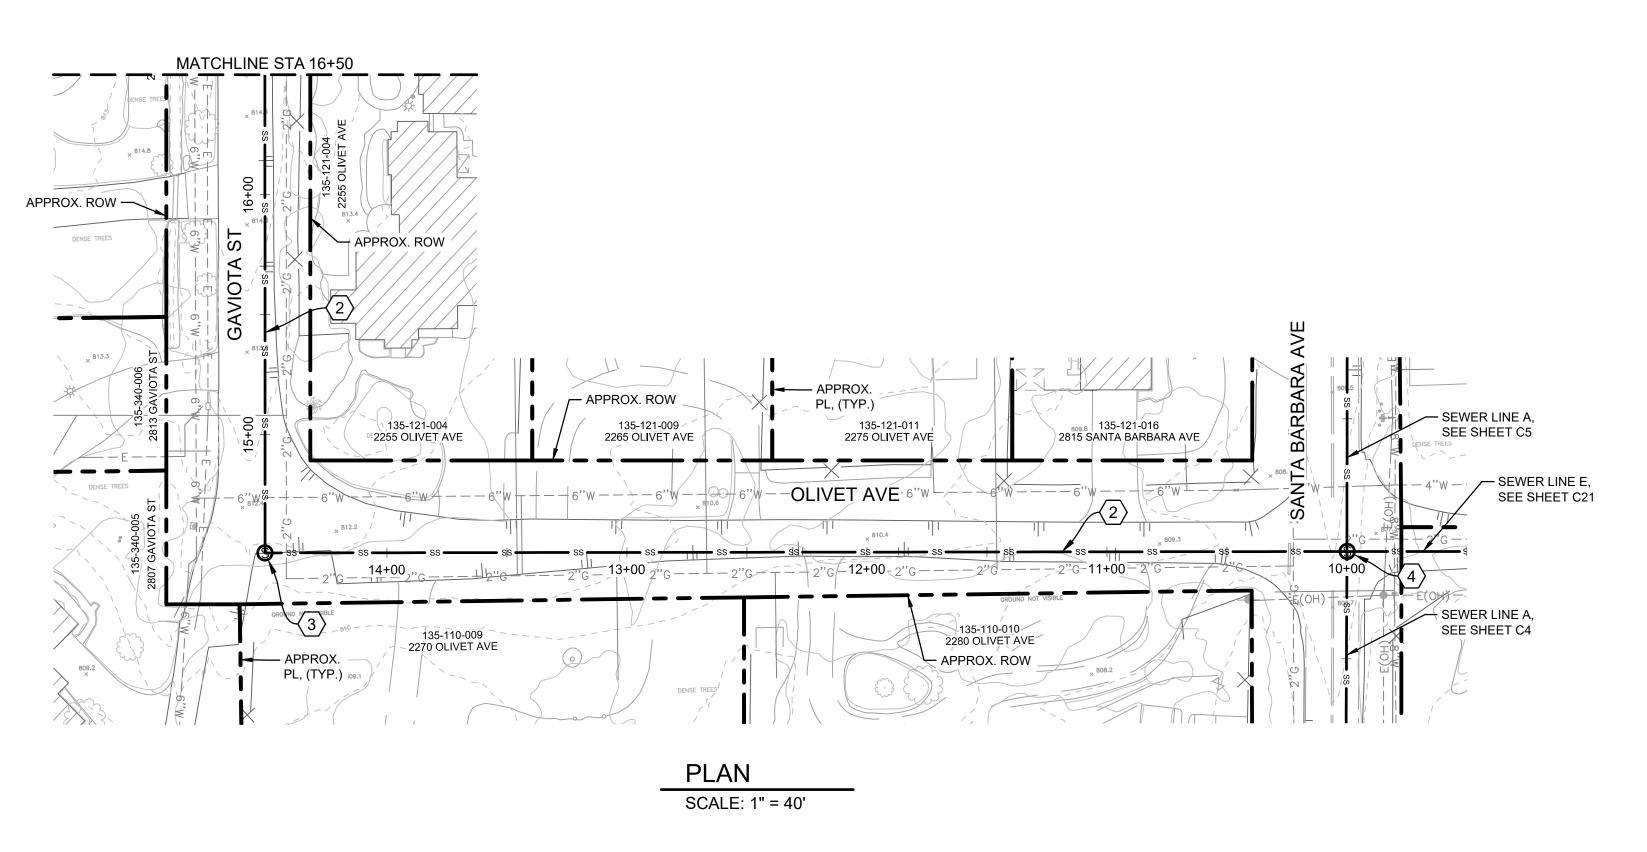


## 

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- igg(1igg) CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $raket{2}$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- $\overline{\langle 4 \rangle}$  CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- (5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
ΖО.	DATE	REVISIONS	DATE:	06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441


LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE FOR PLAN AND PROFILE STA 10+00 TO STA 16+50 OLIVET AVE. - GAVIOTA ST.

PROJECT NO.

184031368

DWG NO. <u>C22</u>
SHT. <u>24</u> OF <u>54</u>

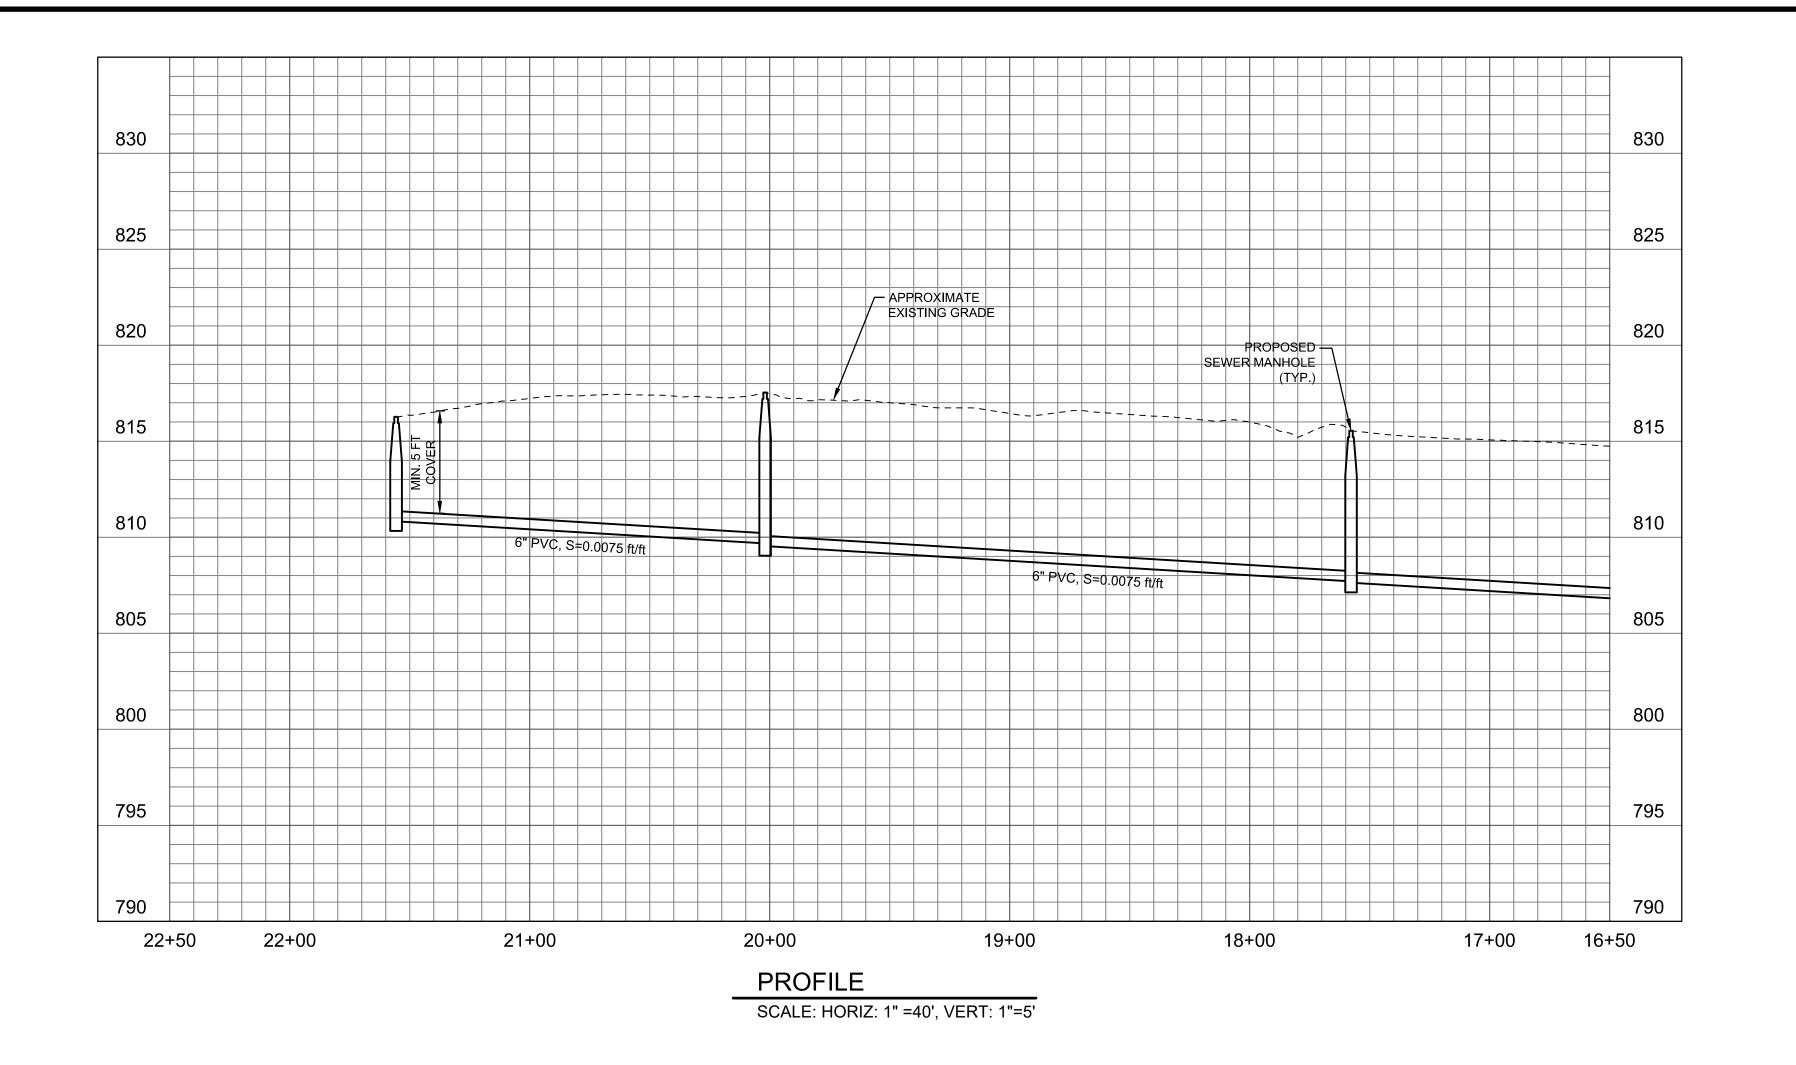

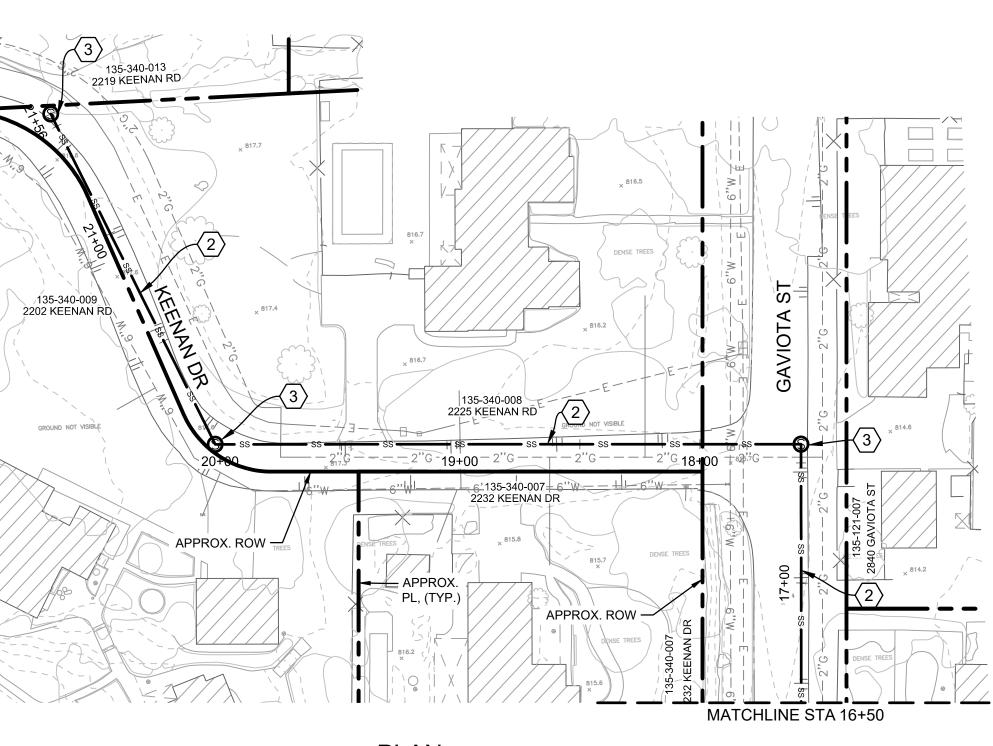

PLAN SCALE: 1" = 40'

30% SUBMITTAL


DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022





LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

### SEWER LINE FOR PLAN AND PROFILE STA 16+50 TO STA 21+56 GAVIOTA ST. - KEENAN DR.

PROJECT NO.

184031368

21+56

DWG NO. C23

1"=40'-0"

DWG NO. C23
SHT. 25 OF 54

THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.

D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

SHEET CONSTRUCTION NOTES

1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.

2 CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.

GENERAL SHEET NOTES

A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE

TO THE ATTENTION OF THE ENGINEER.

APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA

AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT

B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR

ARE SUBJECT TO CHANGE DURING FINAL DESIGN.

CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND

C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND


**KEY MAP** 

3 CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.

3 CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.


4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.

5 CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

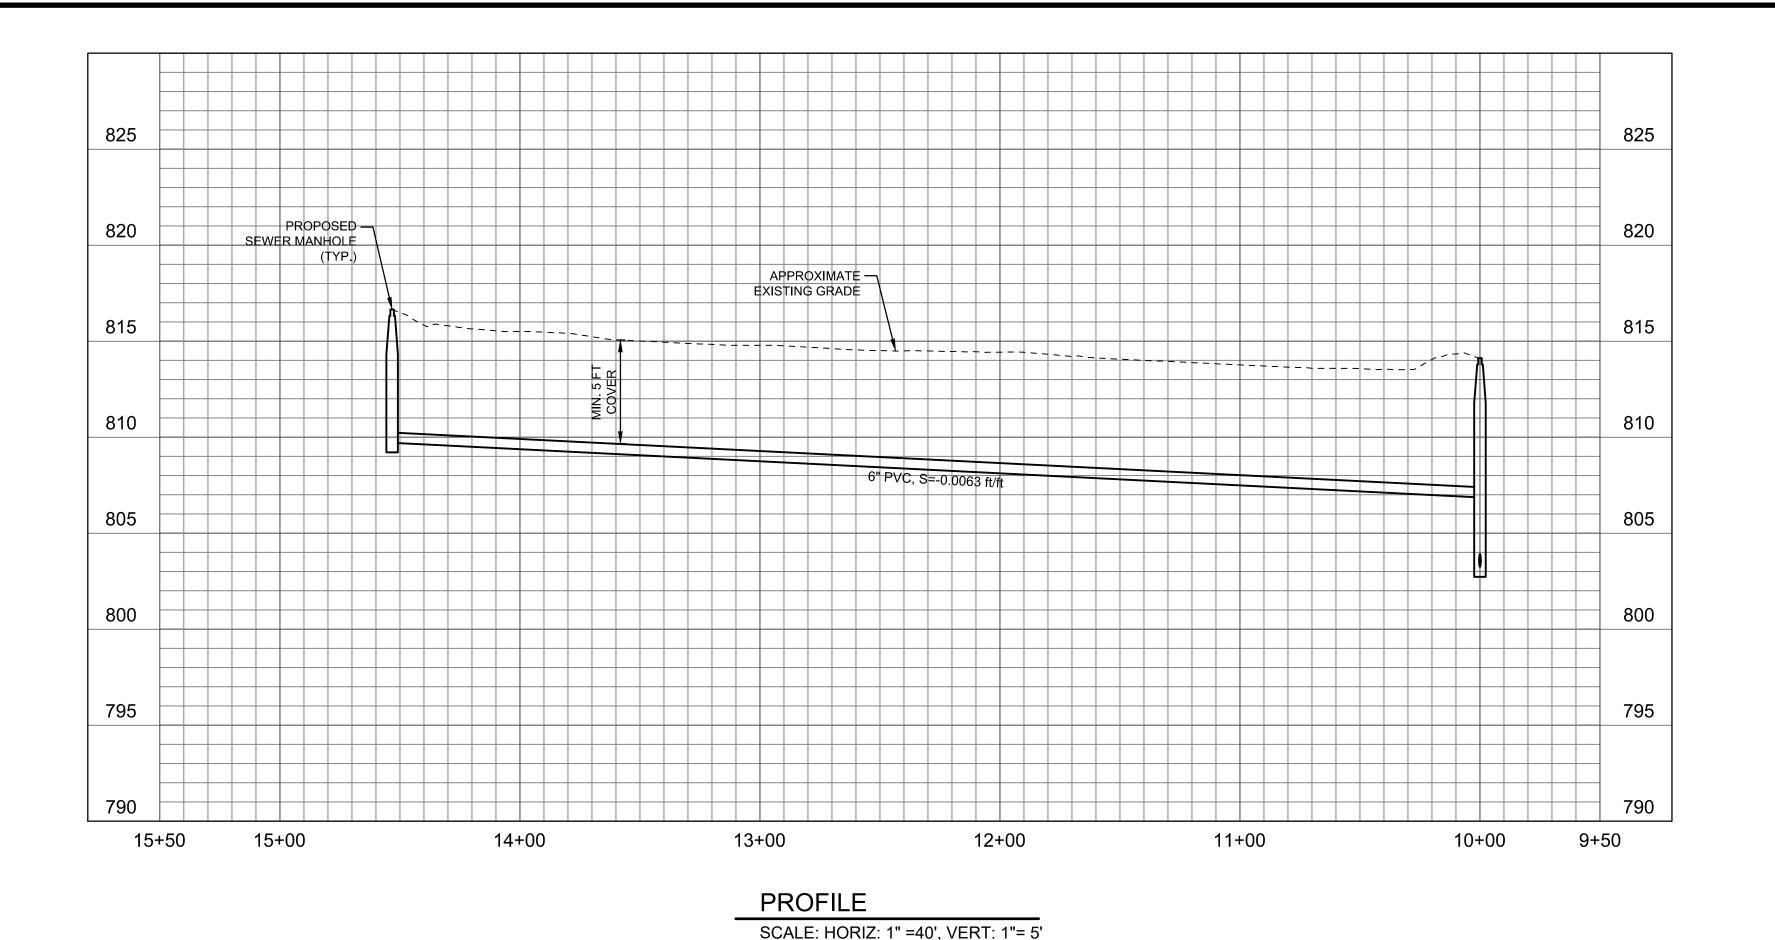

- SEWER LINE A, SEE SHEET C5 S × BIT.2 APPROX. APPROX. ROW 135-085-022 2859 SANTA BARBARA AVE 2870 GAVIOTA ST 135-085-021 2851 SANTA BARBARA AVE 135-085-020 2867 SANTA BARBARA AVE HOLLISTER ST 135-121-007 2840 GAVIOTA ST 2853 SANTA BARBARA AVE 2849 SANTA BARBARA AVE — APPROX. PL, APPROX. ROW -APPROX. PL, (TYP.) = SEWER LINE A SEE SHEET C5 PLAN

SCALE: 1" = 40'

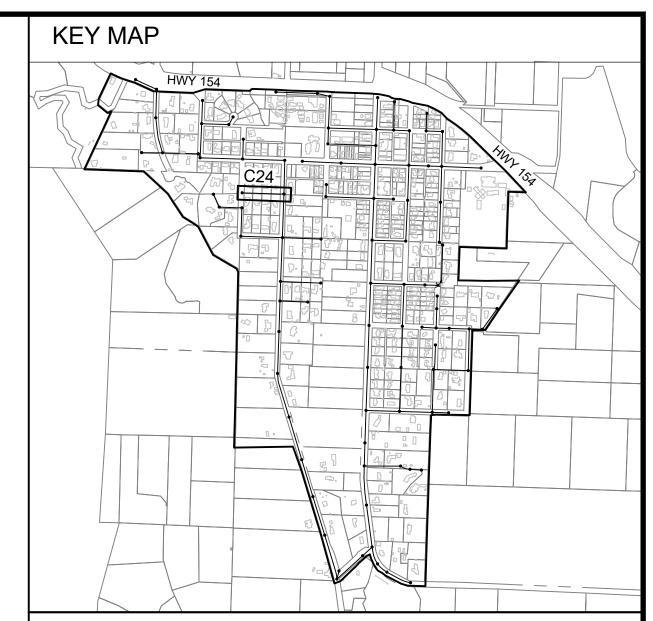


### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (2) CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
NO.	DATE	REVISIONS	DATE:	06/28/2022



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE GOT PLAN AND PROFILE STA 10+00 FO STA 14+53
HOLLISTER STREET


PROJECT NO.

184031368


DWG NO. C24

SHT. 26 OF 54

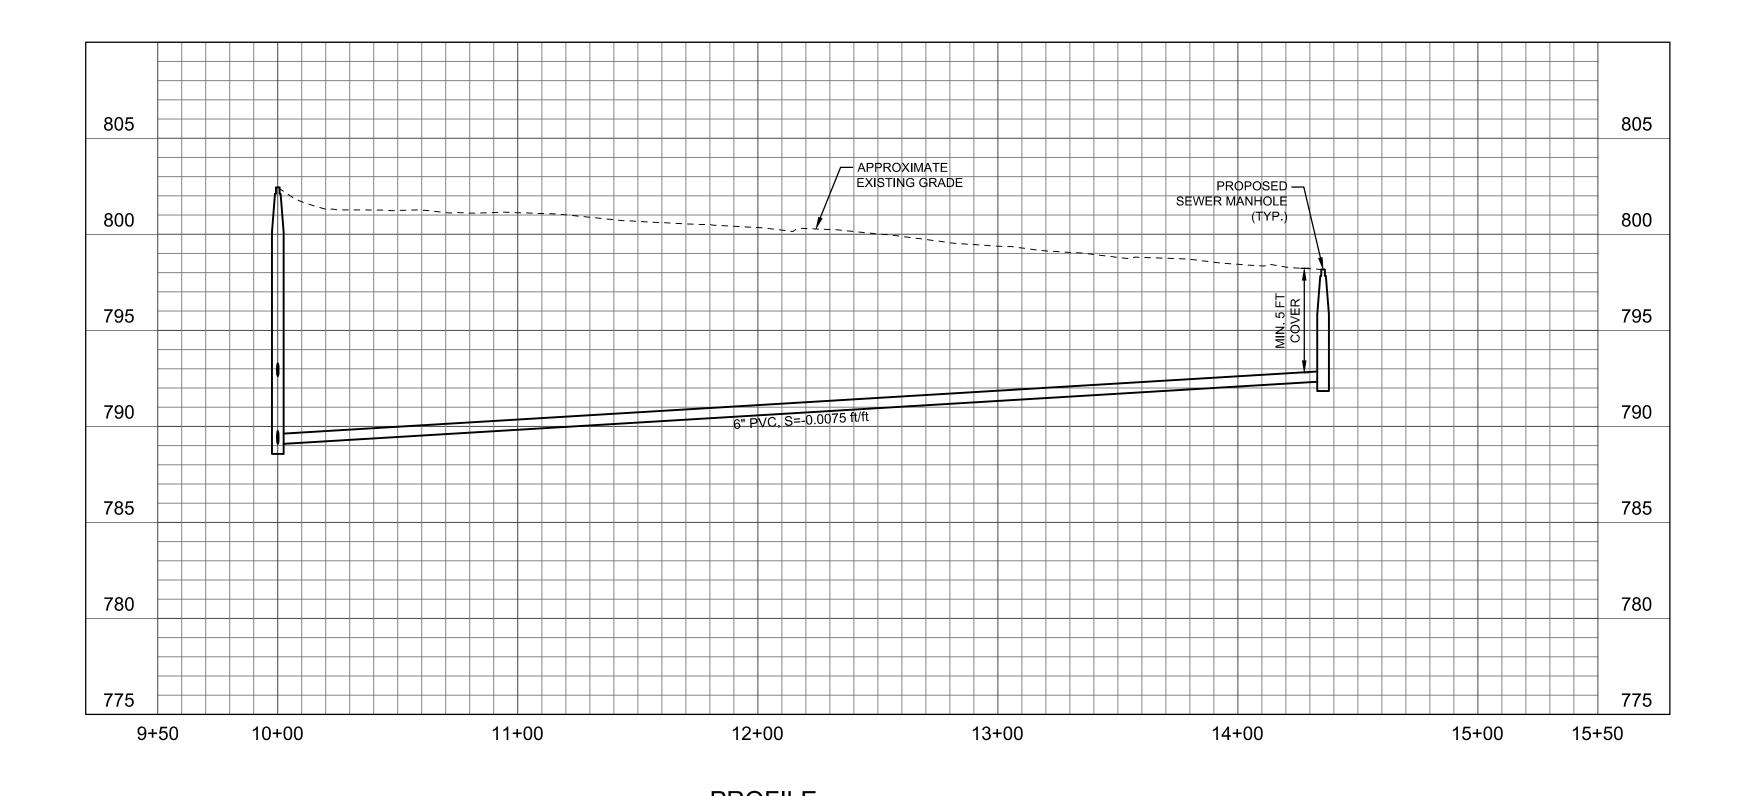

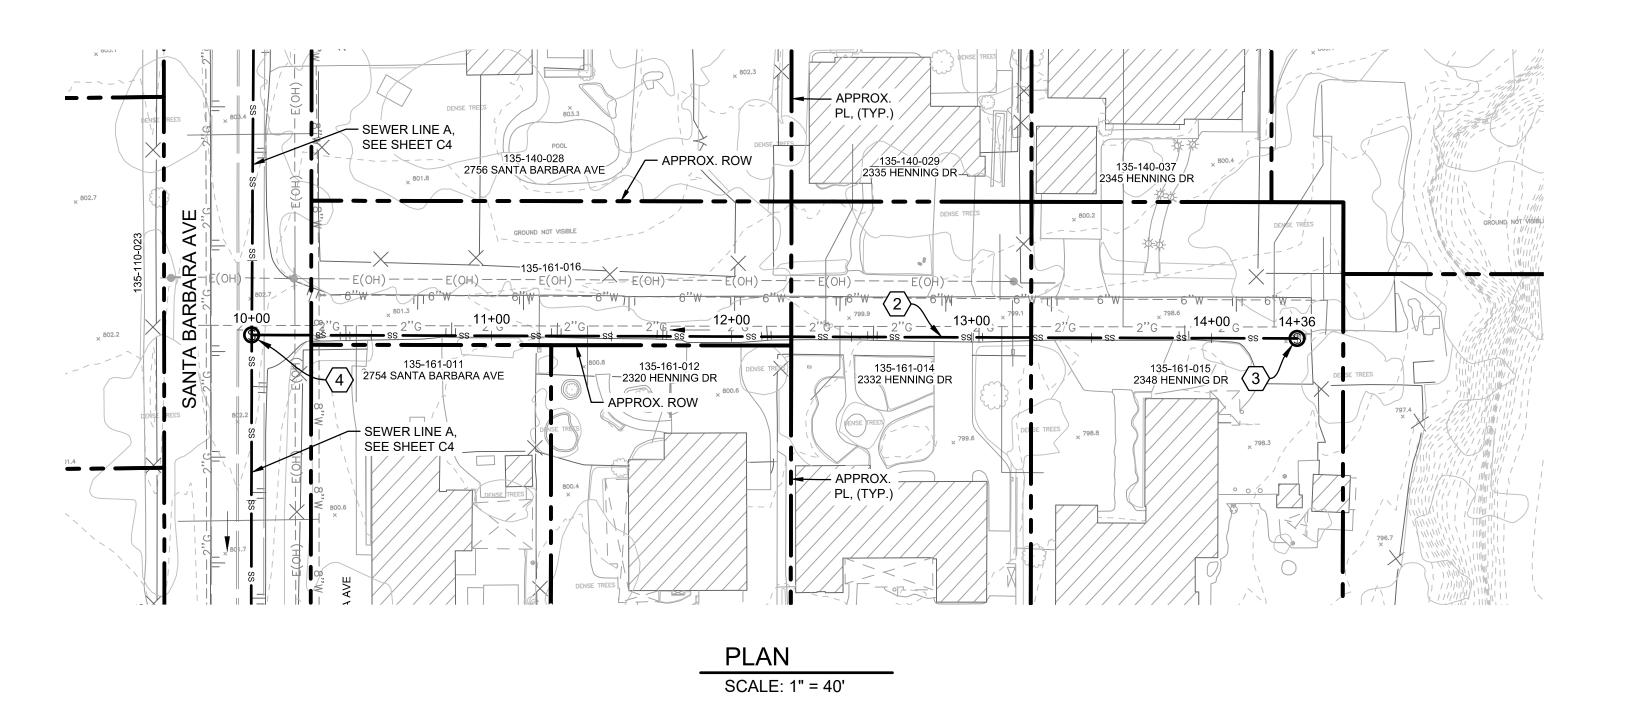

SCALE: HORIZ: 1" =40', VERT: 1"= 5'

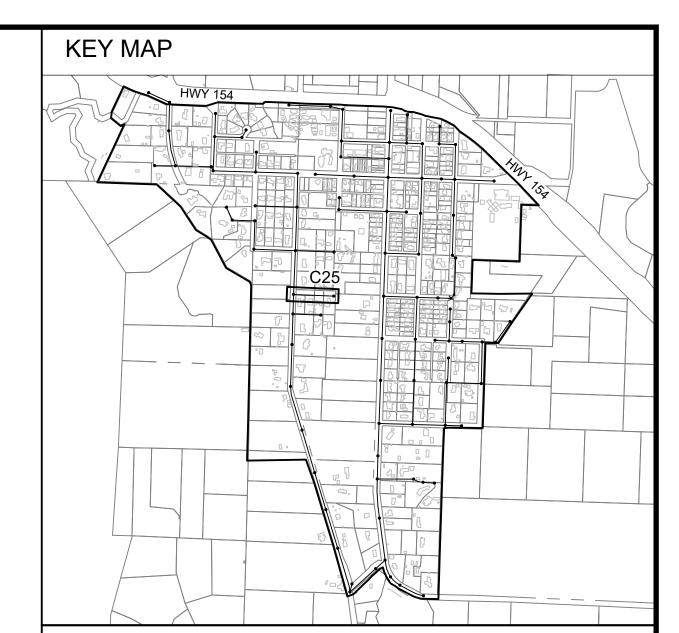


### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- igg(1igg) CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\overline{\langle 2 \rangle}$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

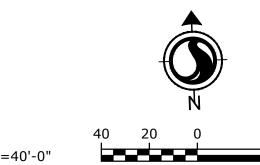

30% SUBMITTAL

DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DESIGNED BY: 06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE D
PLAN AND PROFILE
STA 10+00 TO STA 14+36
DRIVEWAY TO SANTA BARBARA AVE.

PROJECT NO.

184031368

DWG NO. C25

SHT. 27 OF 54

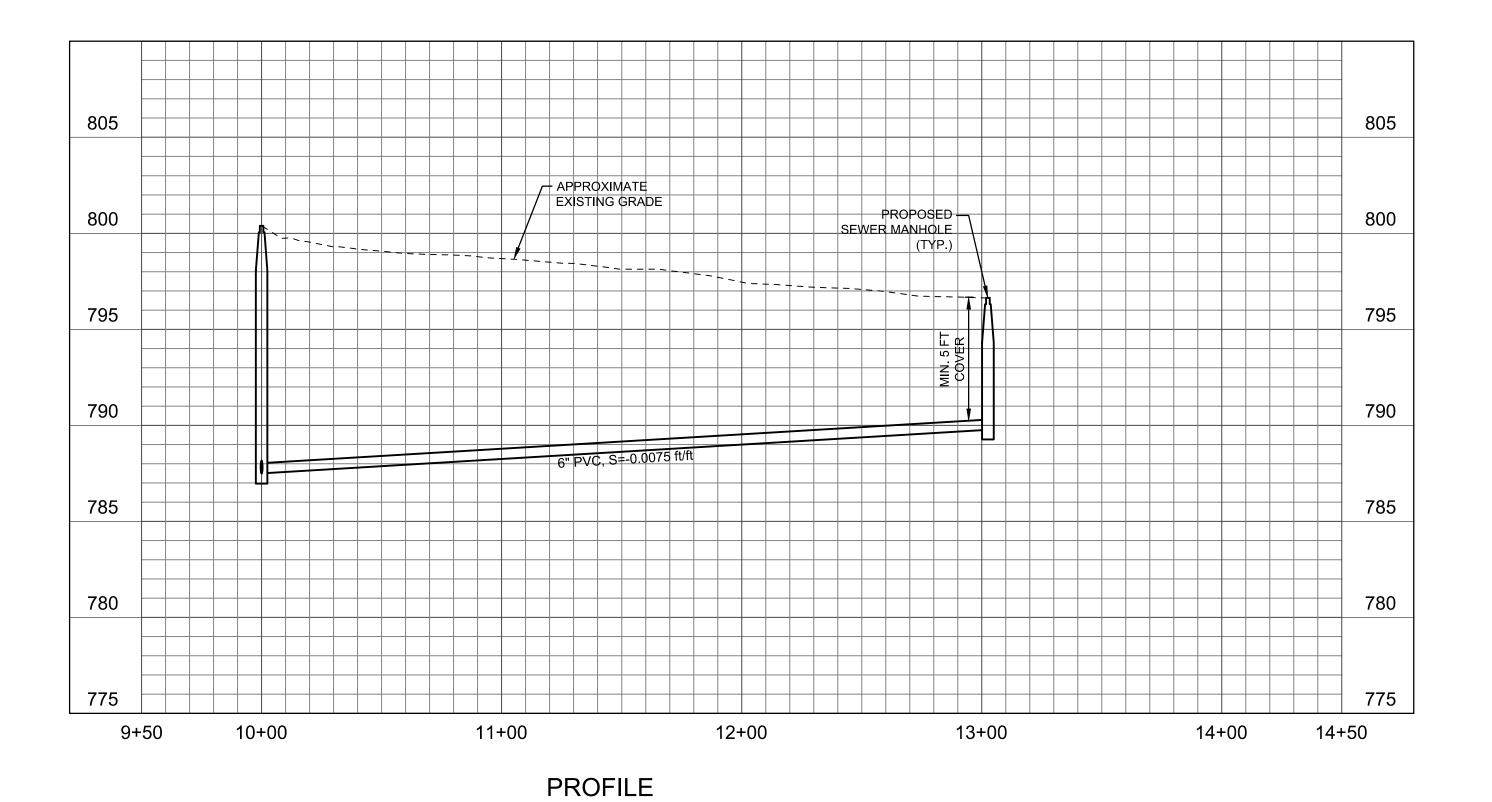

APPROX. ROW

SEE SHEET C4

3

SEWER LINE A, SEE SHEET C4


SEE SHEET C4

3

SEWER LINE A, SEE SHEET C4

SCALE: HORIZ: 1" =40', VERT: 1"=5'

PLAN SCALE: 1" = 40'

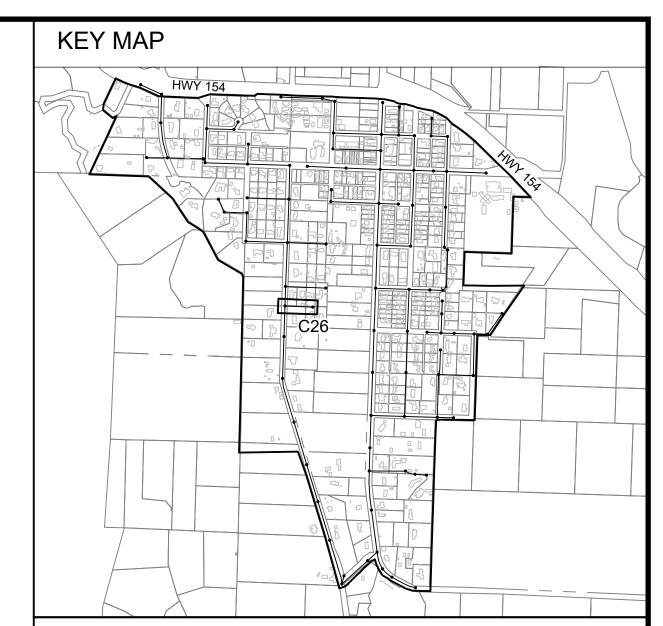

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- $\langle 1 \rangle$  CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\overline{\langle 2 \rangle}$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 3 CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- 5 CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- $\fbox{6}$  CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.


N

1"=40'-0"

40 20 0

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ	
			DRAFTED BY:	VH	0
			CHECKED BY:	ALG/ GA	IF NO
NO.	DATE	REVISIONS	DATE:	06/28/2022	TH N






LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441


LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE COTPLAN AND PROFILE STA 10+00 TO STA 13+03
HENNING DRIVE


PROJECT NO. 184031368

DWG NO. C26
SHT. 28 OF 54

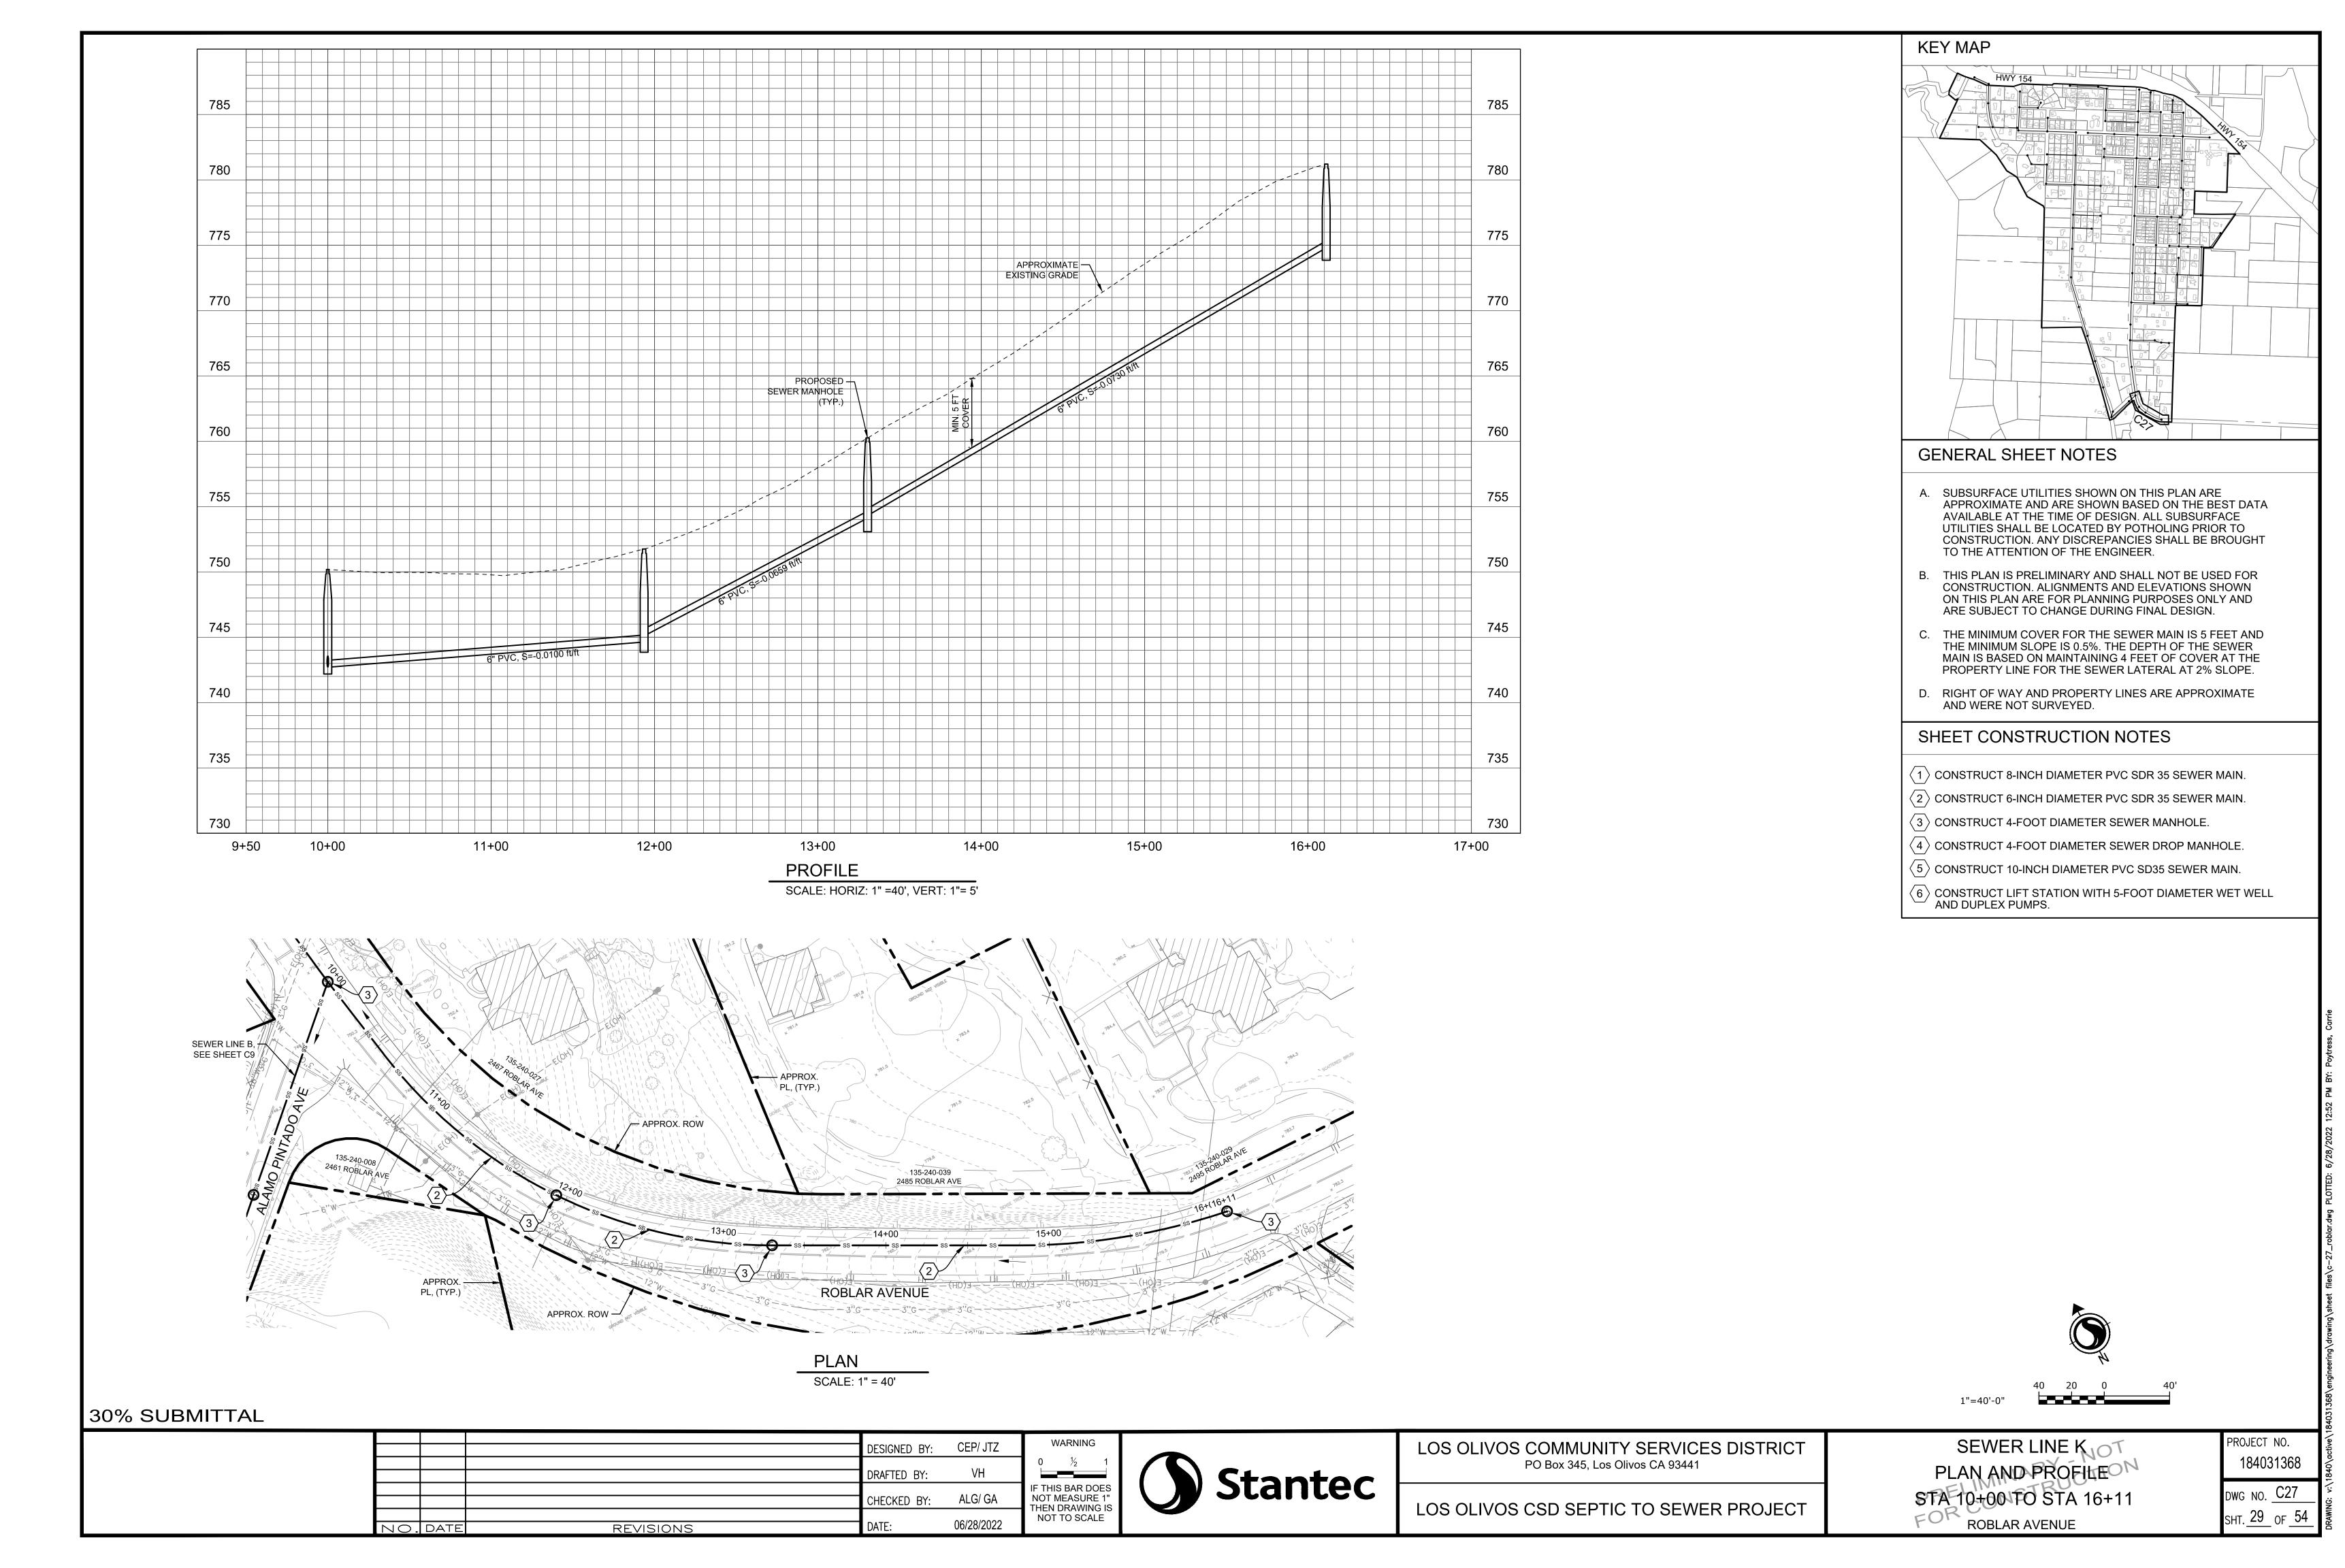

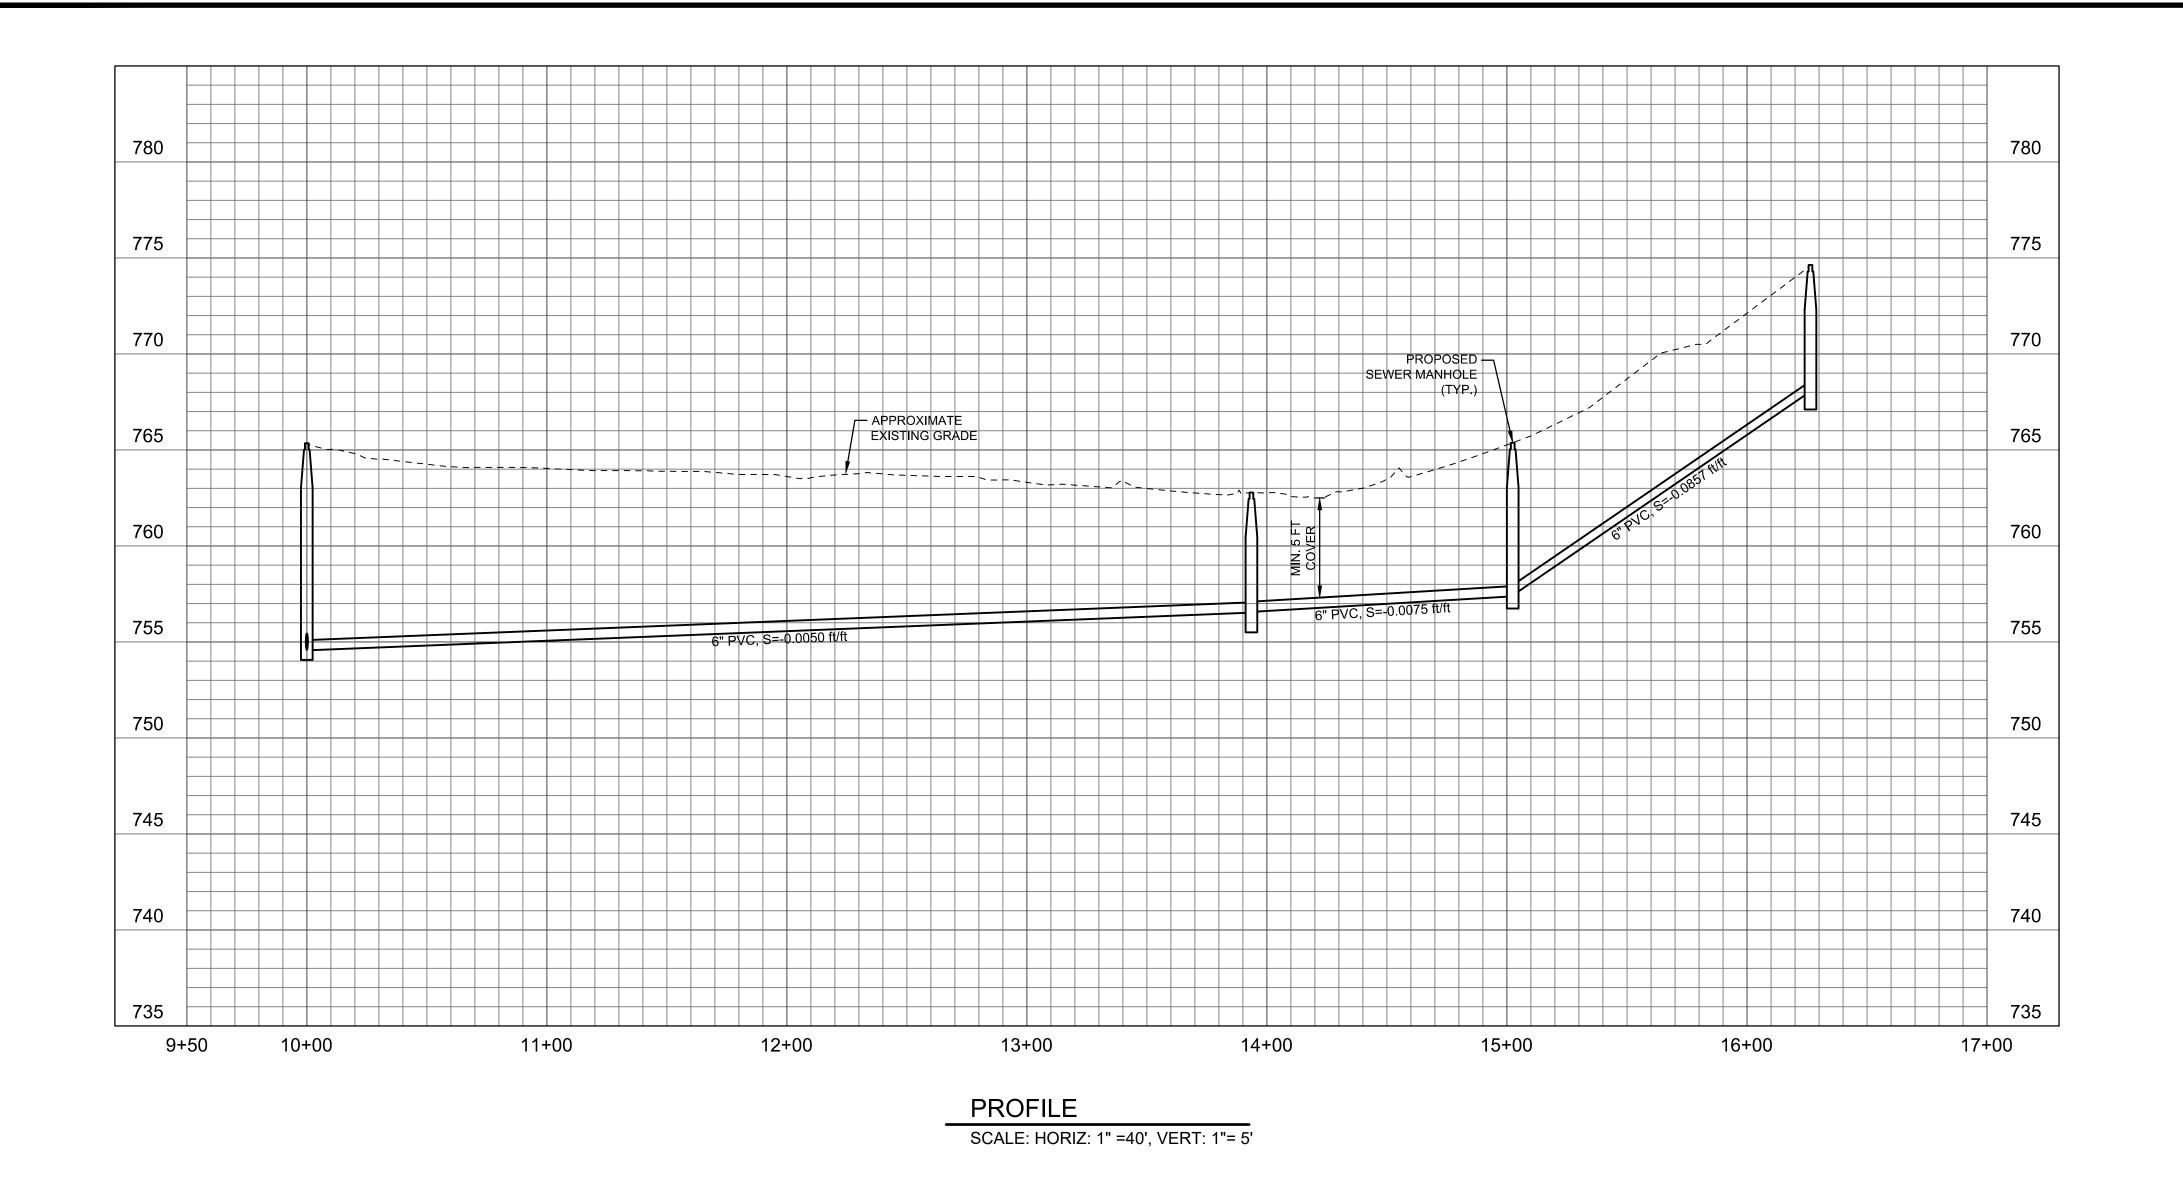

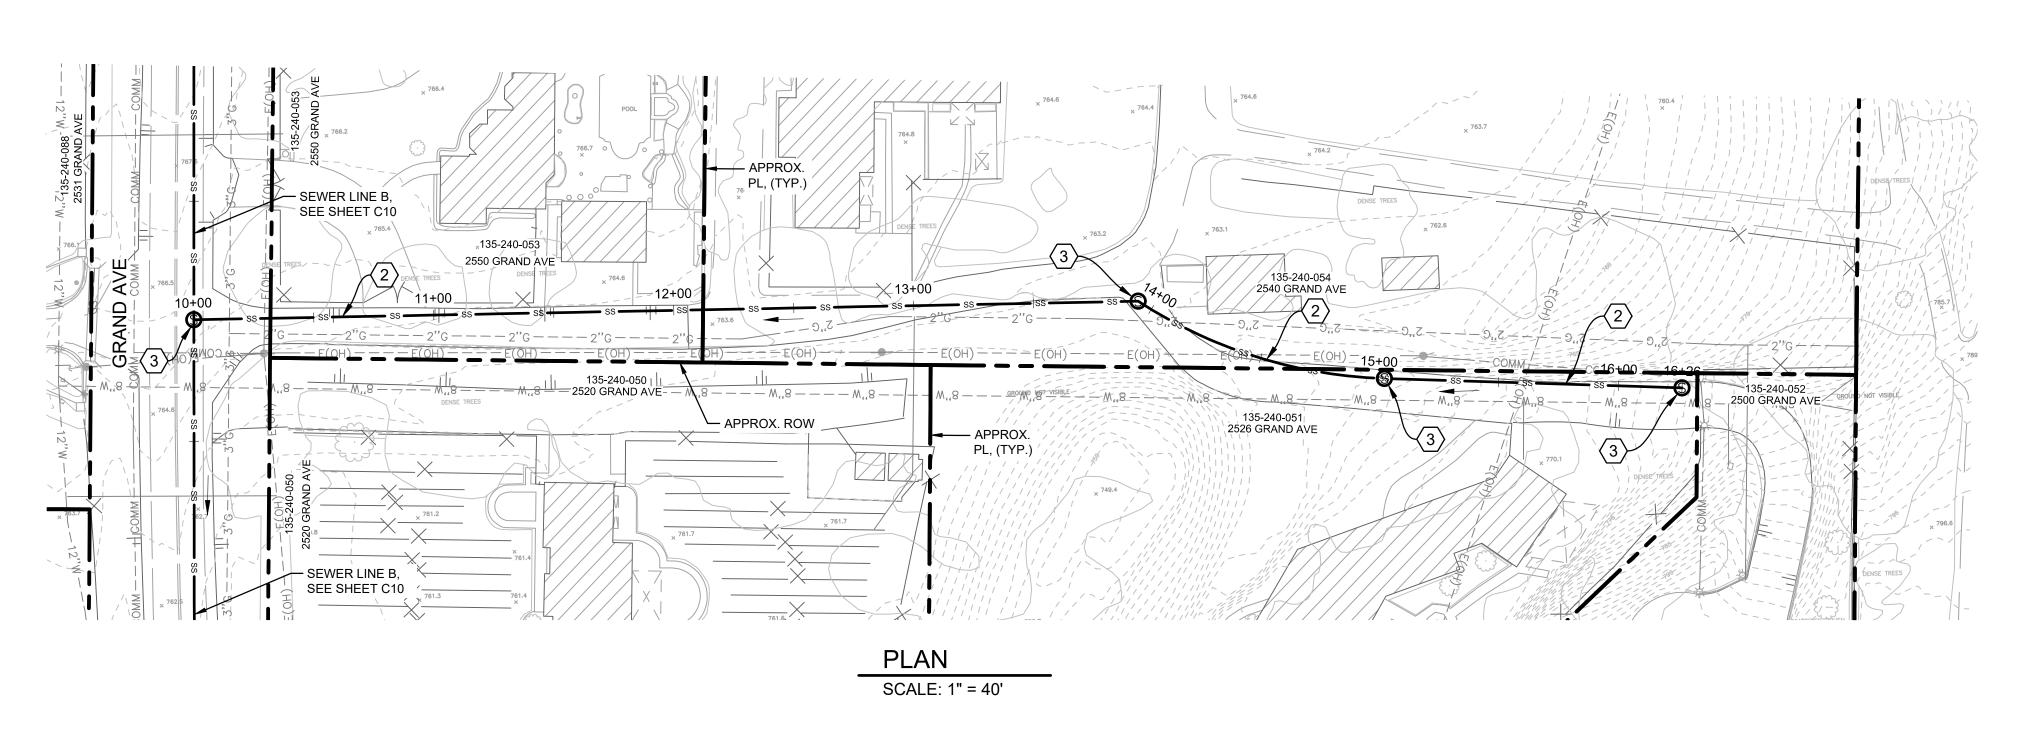


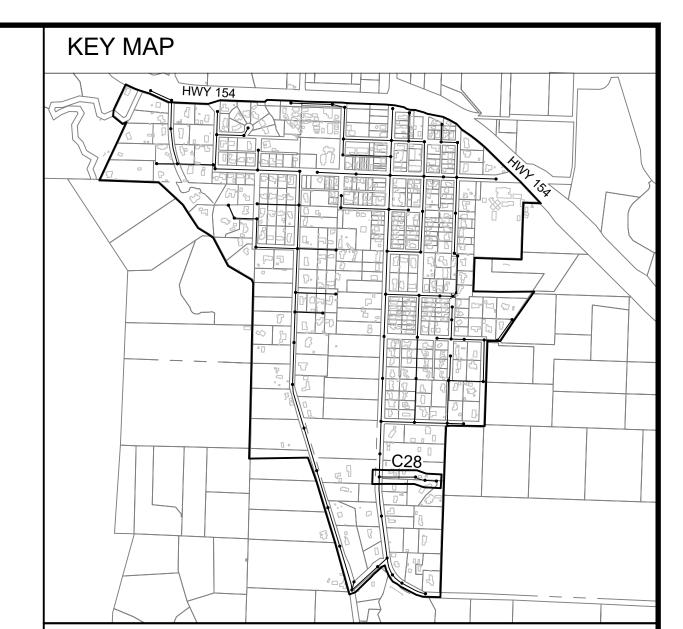

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 2 CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- 5 CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- $\fbox{6}$  CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE




LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441


LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE L
PLAN AND PROFILE
STA 10+00 TO STA 16+26
DRIVEWAY TO GRAND AVE.

PROJECT NO. 184031368

DWG NO. <u>C28</u>
SHT. <u>30</u> OF <u>54</u>

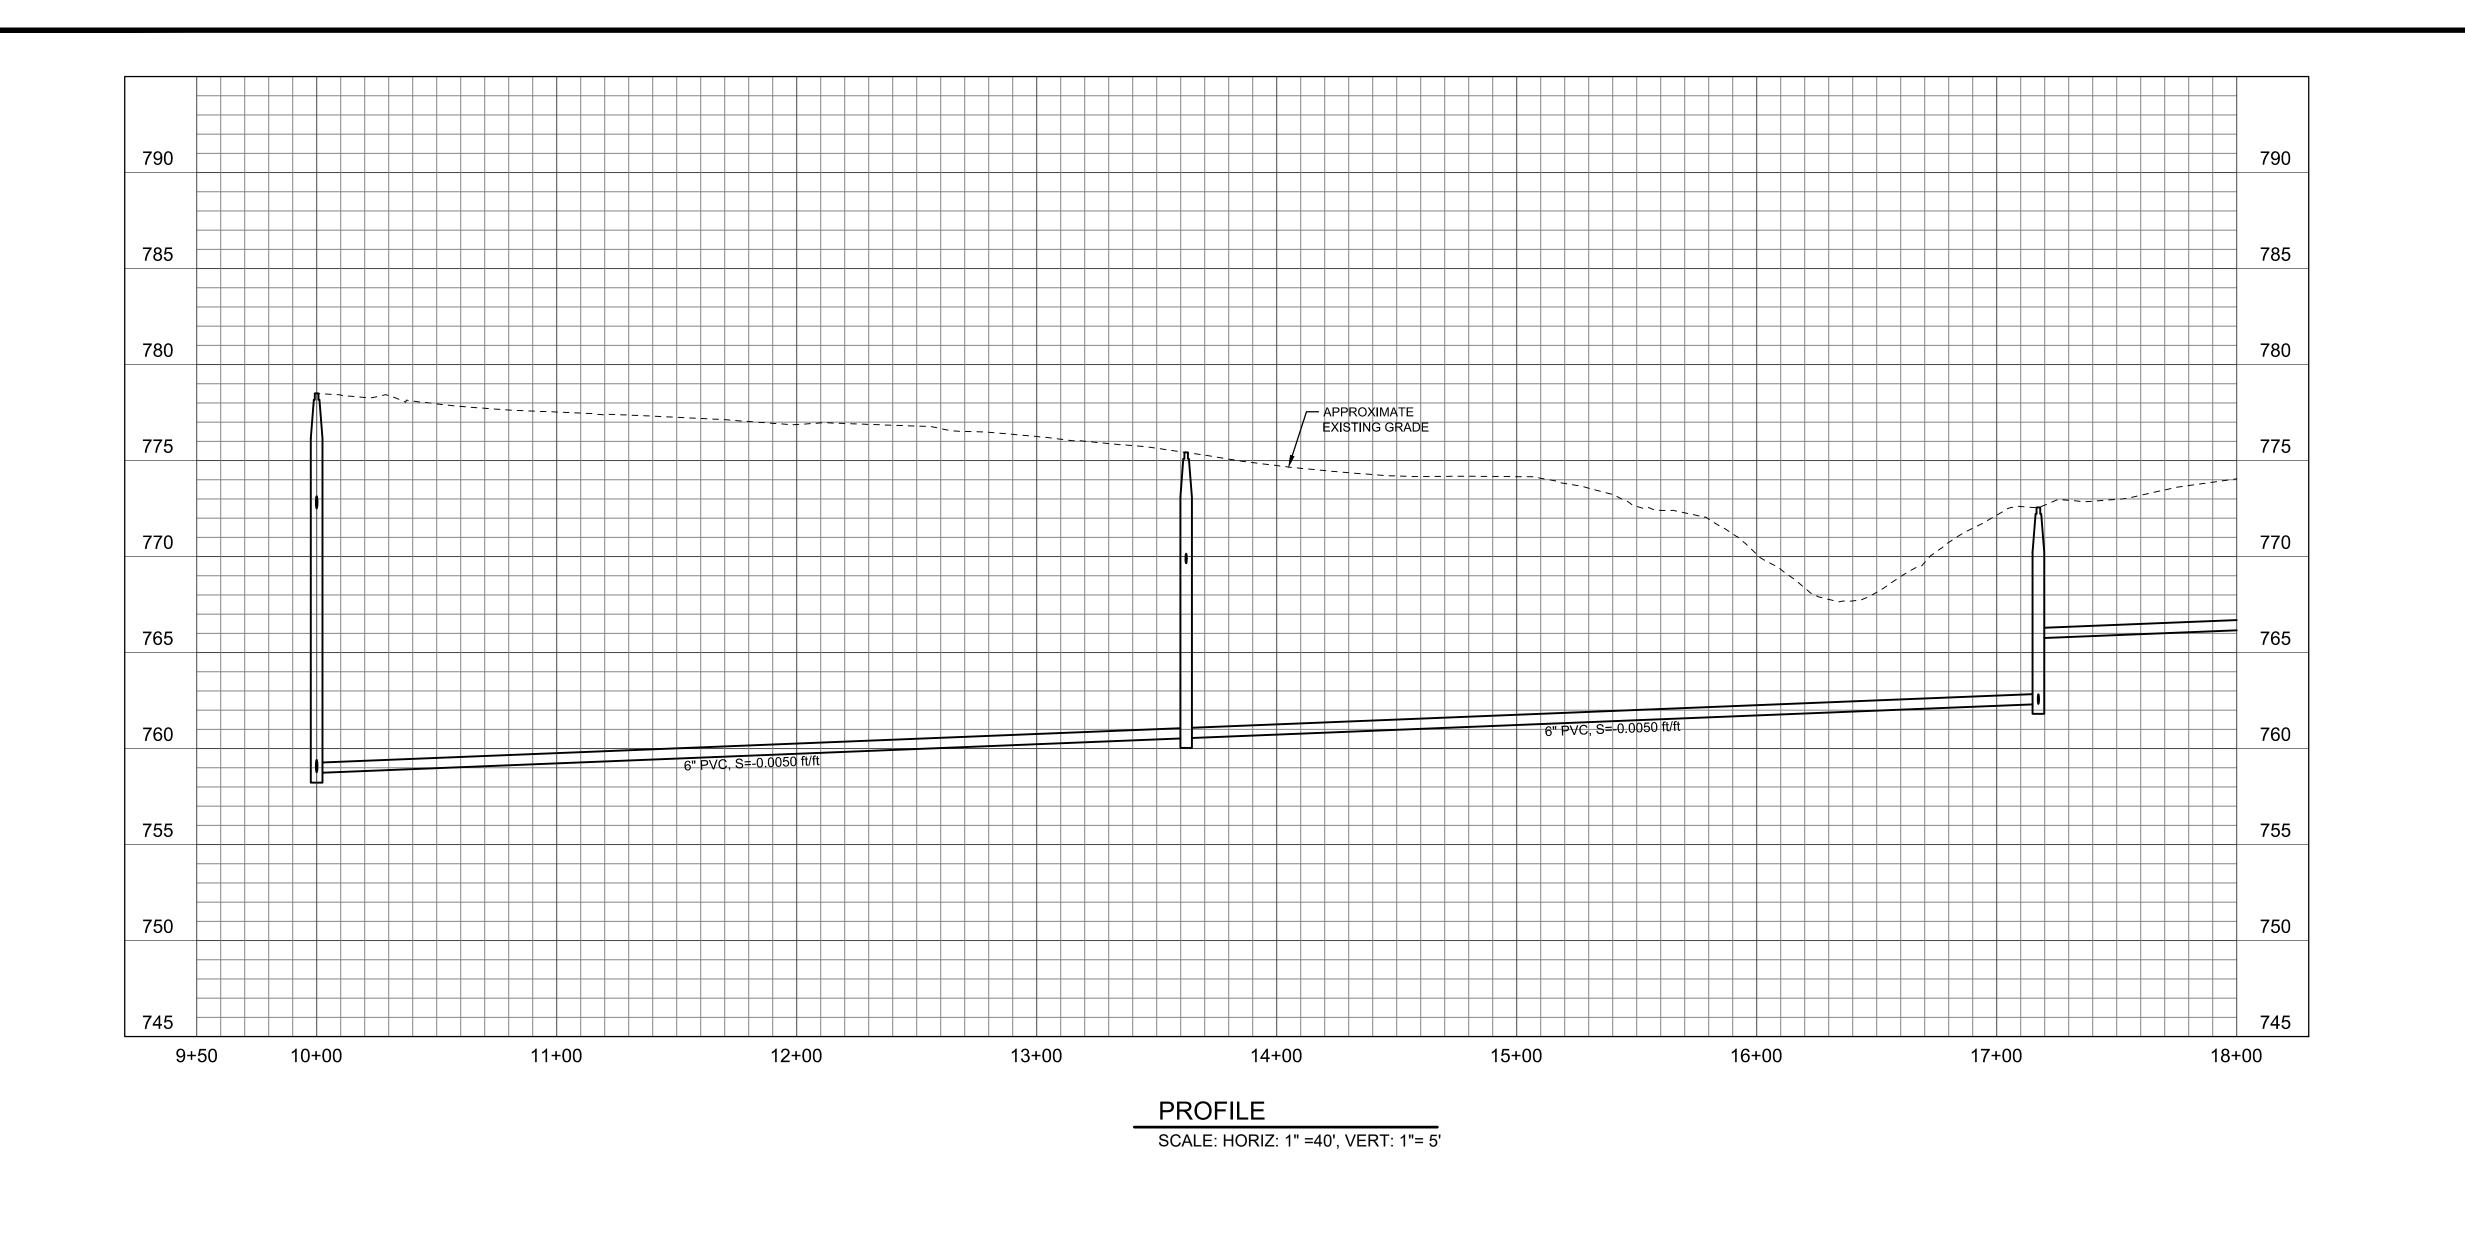

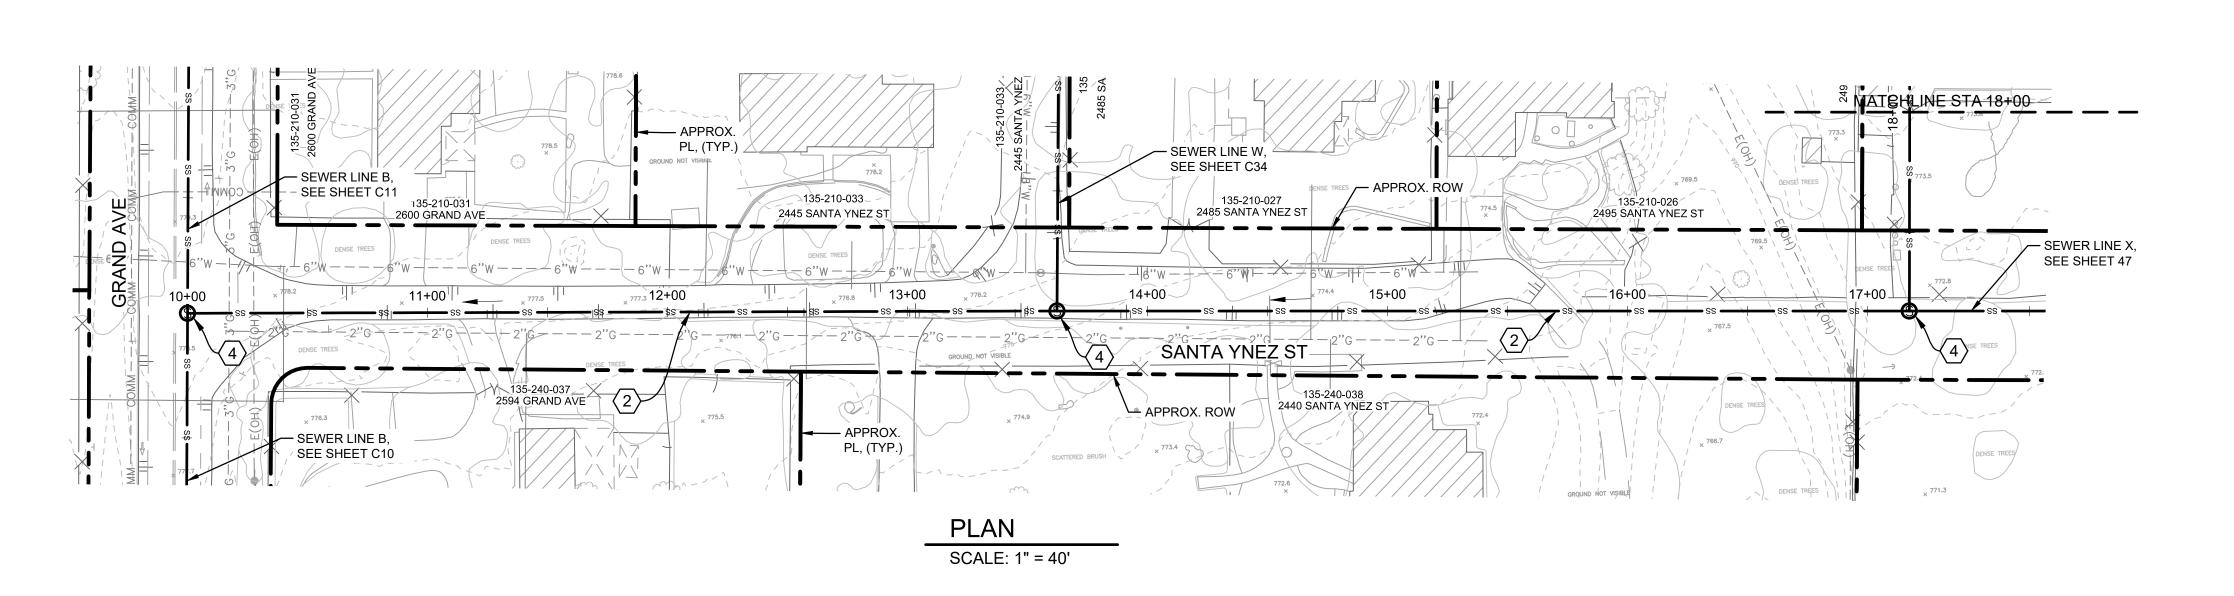


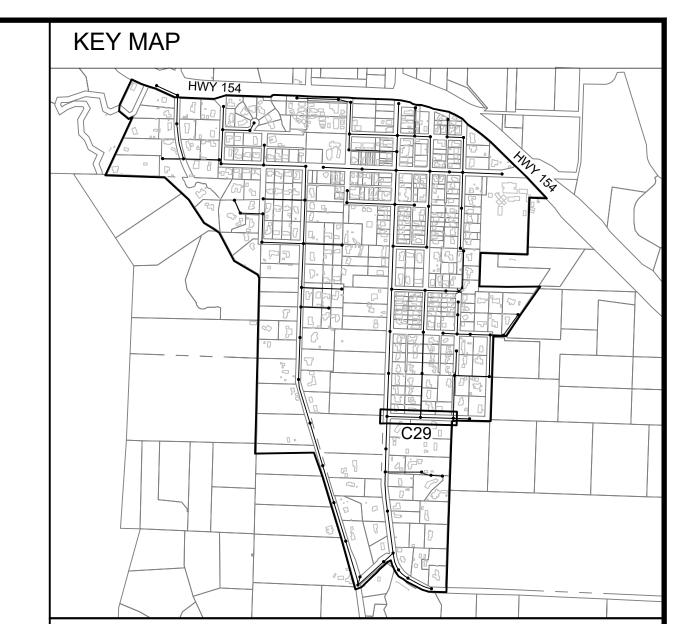

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- (4) CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- (5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- $\fbox{6}$  CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
	DATE	REVISIONS	DATF:	06/28/2022

WARNING IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS NOT TO SCALE




LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441


LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE MOT PLAN AND PROFILE STA 10+00 TO STA 18+00 SANTA YNEZ STREET

PROJECT NO. 184031368 DWG NO. C29

SHT. 31 OF 54

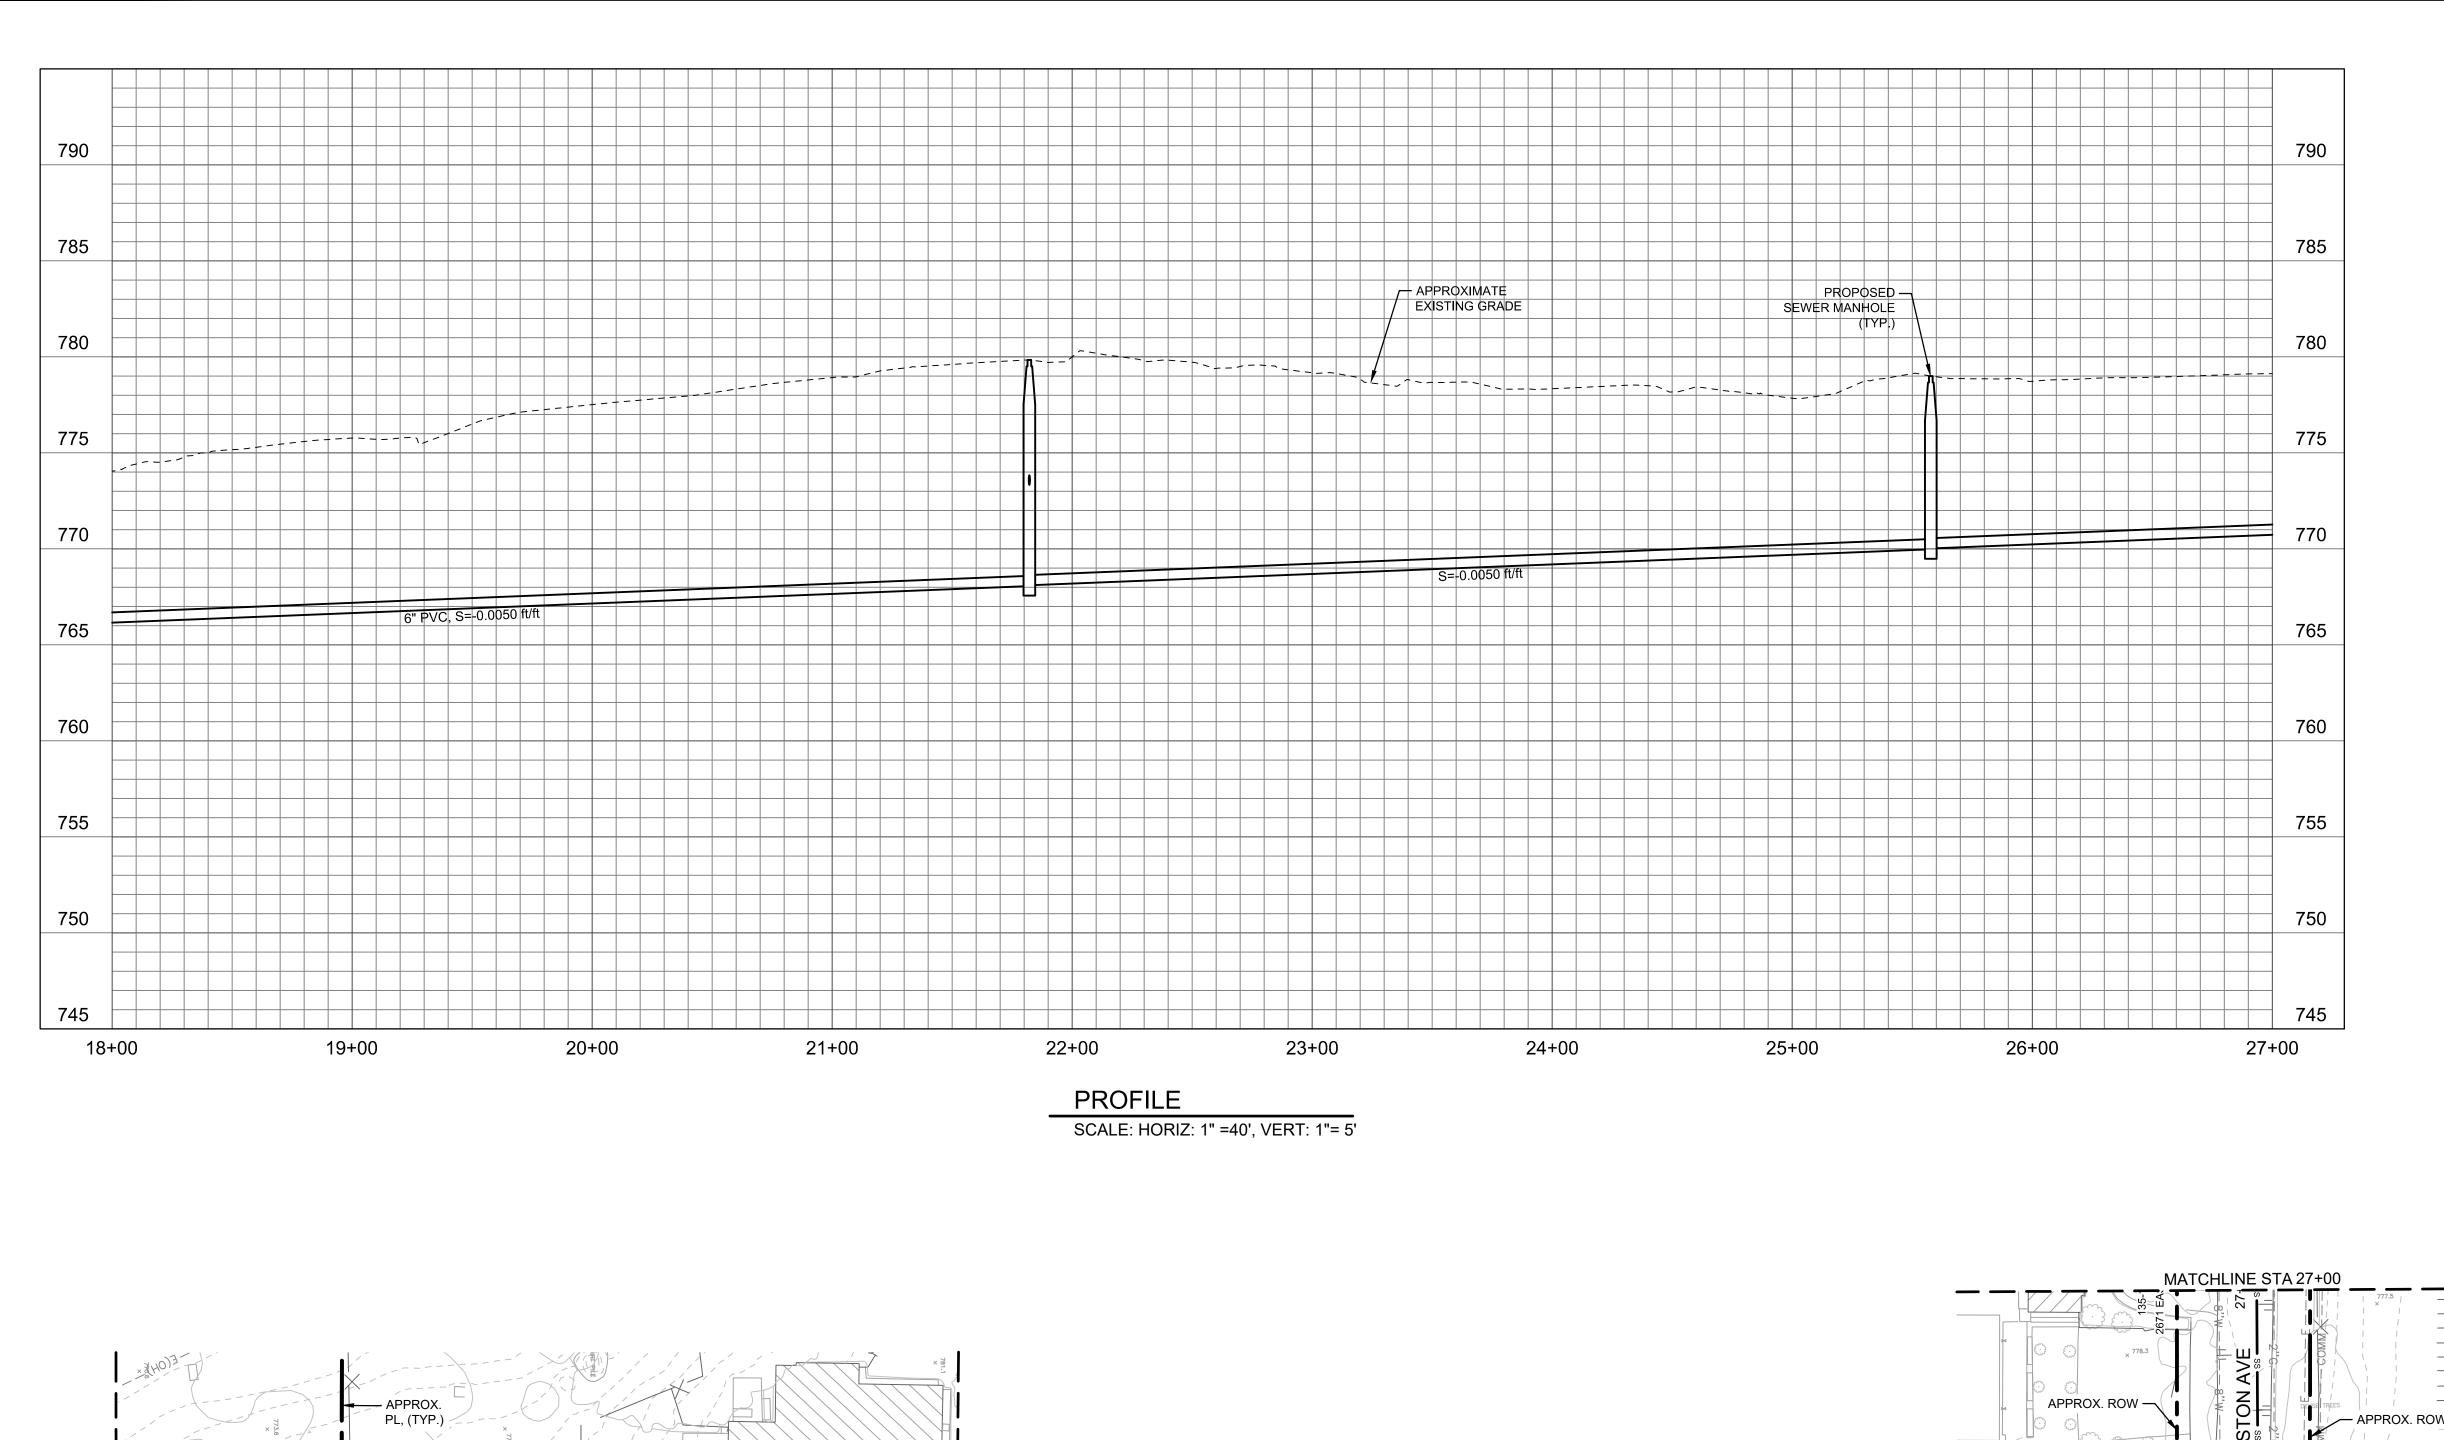

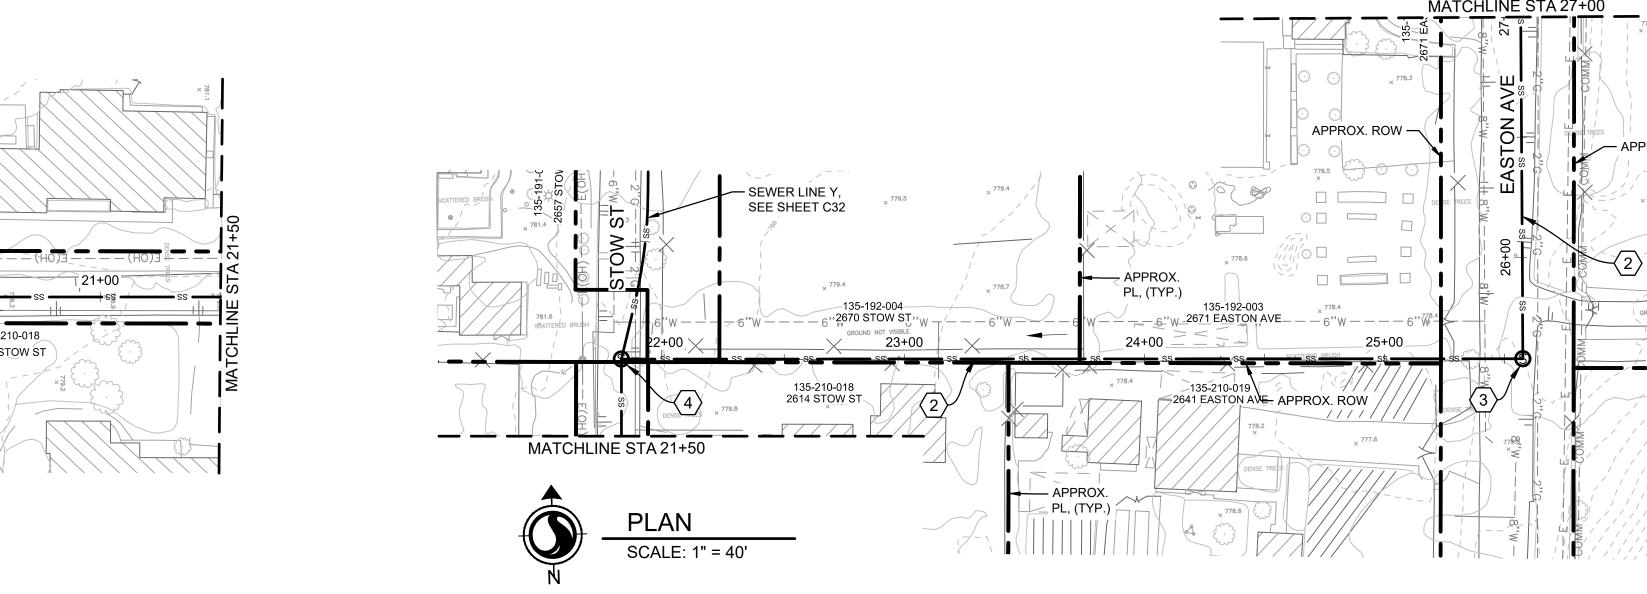

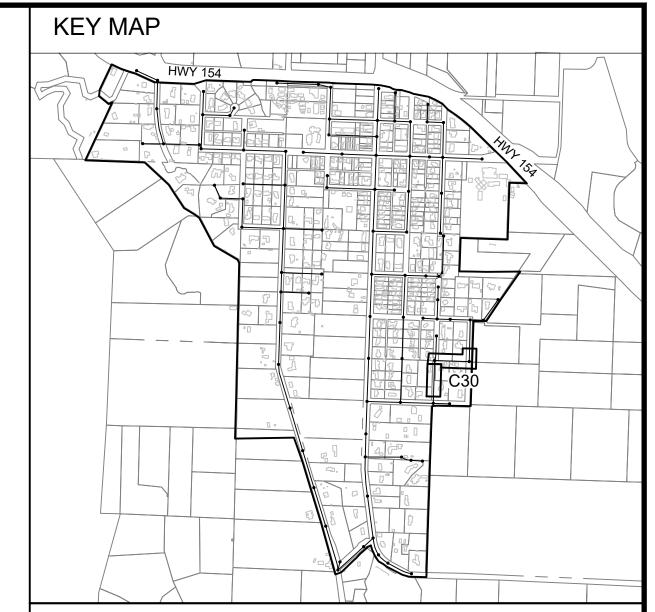

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\overline{\langle 2 \rangle}$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- (5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

"=40'-0" 40 20 0 4

30% SUBMITTAL

135-210-026 2495 SANTÁ YNEZ ST

19+00 ESTOW ST

135-210-021 2612 STOW ST 2

DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO.DATE REVISIONS

DATE: 06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE MOTOPLAN AND PROFILE STA 18+00 TO STA 27+00 STOW ST. - EASTON AVE.


PROJECT NO.

184031368

DWG NO. C30

SHT. 32 OF 54

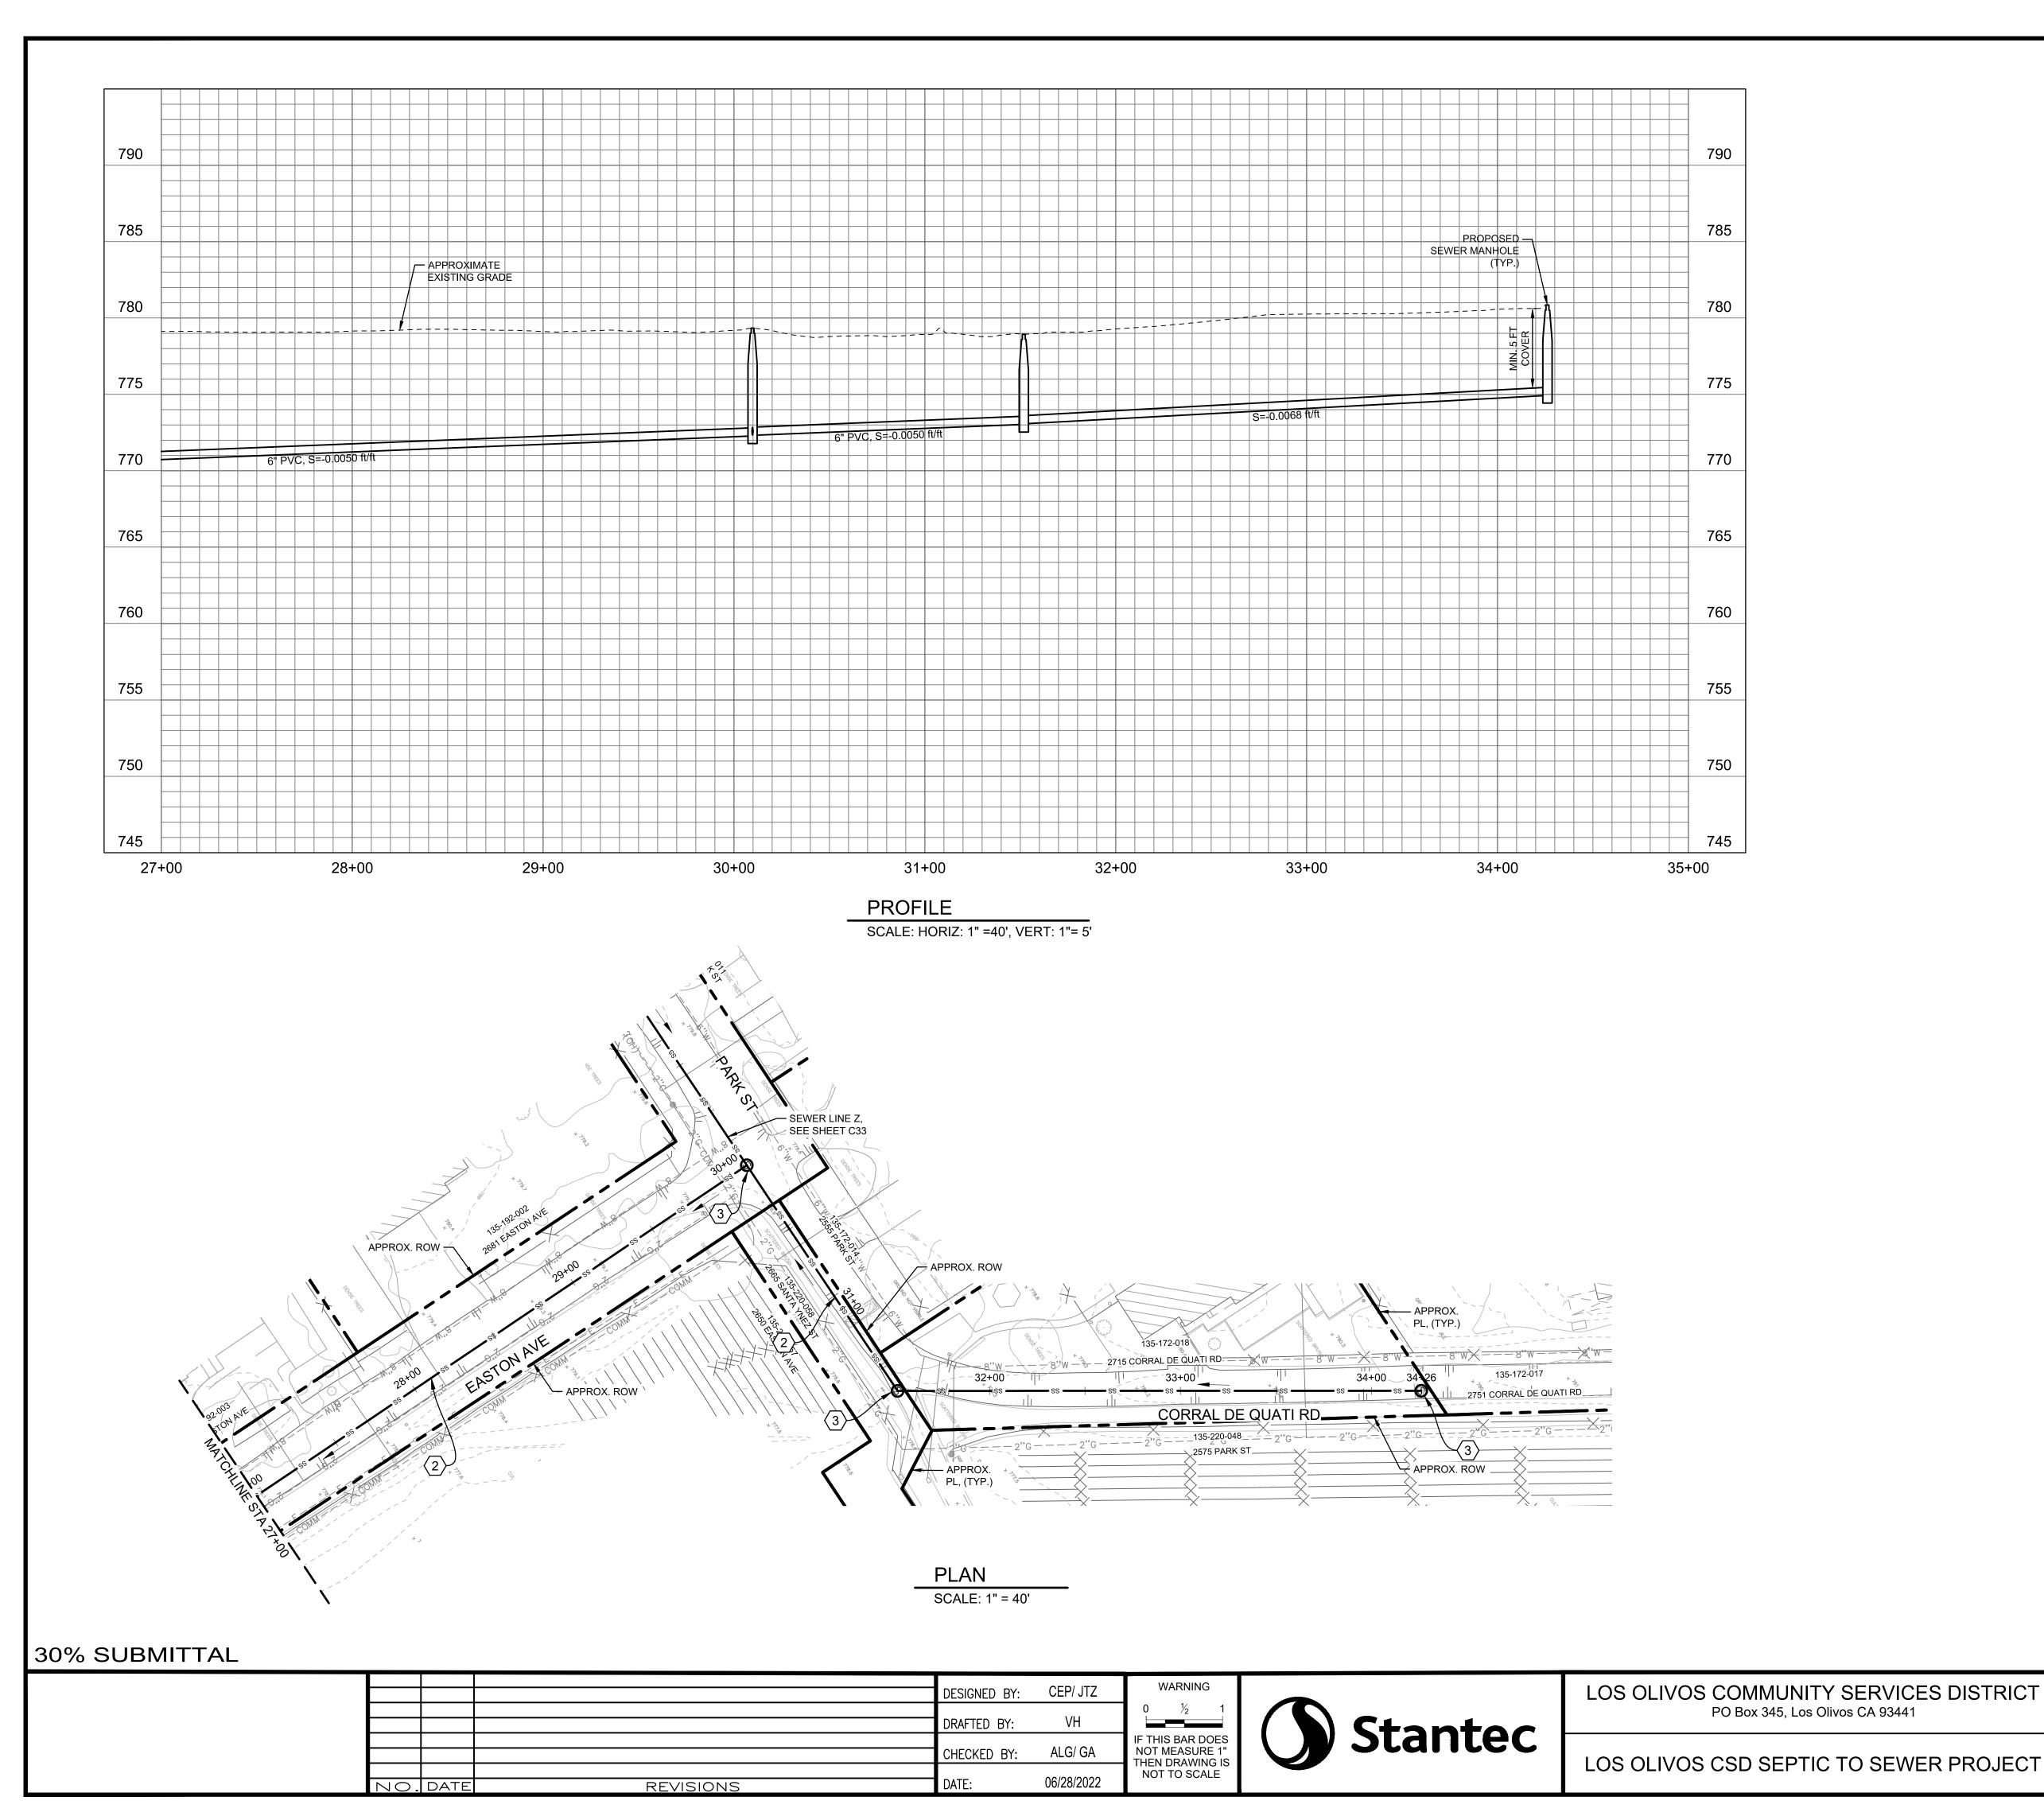

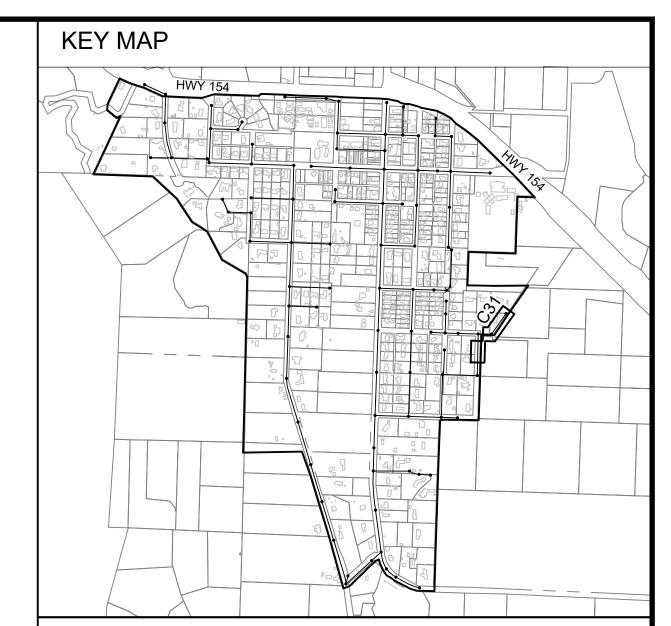

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.





SEWER LINE MOT PLAN AND PROFILEON STA 27+00 TO STA 34+26


PROJECT NO. 184031368 DWG NO. C31

SHT. 33 OF 54

EASTON AVE. - CORRAL DE QUATI RD.

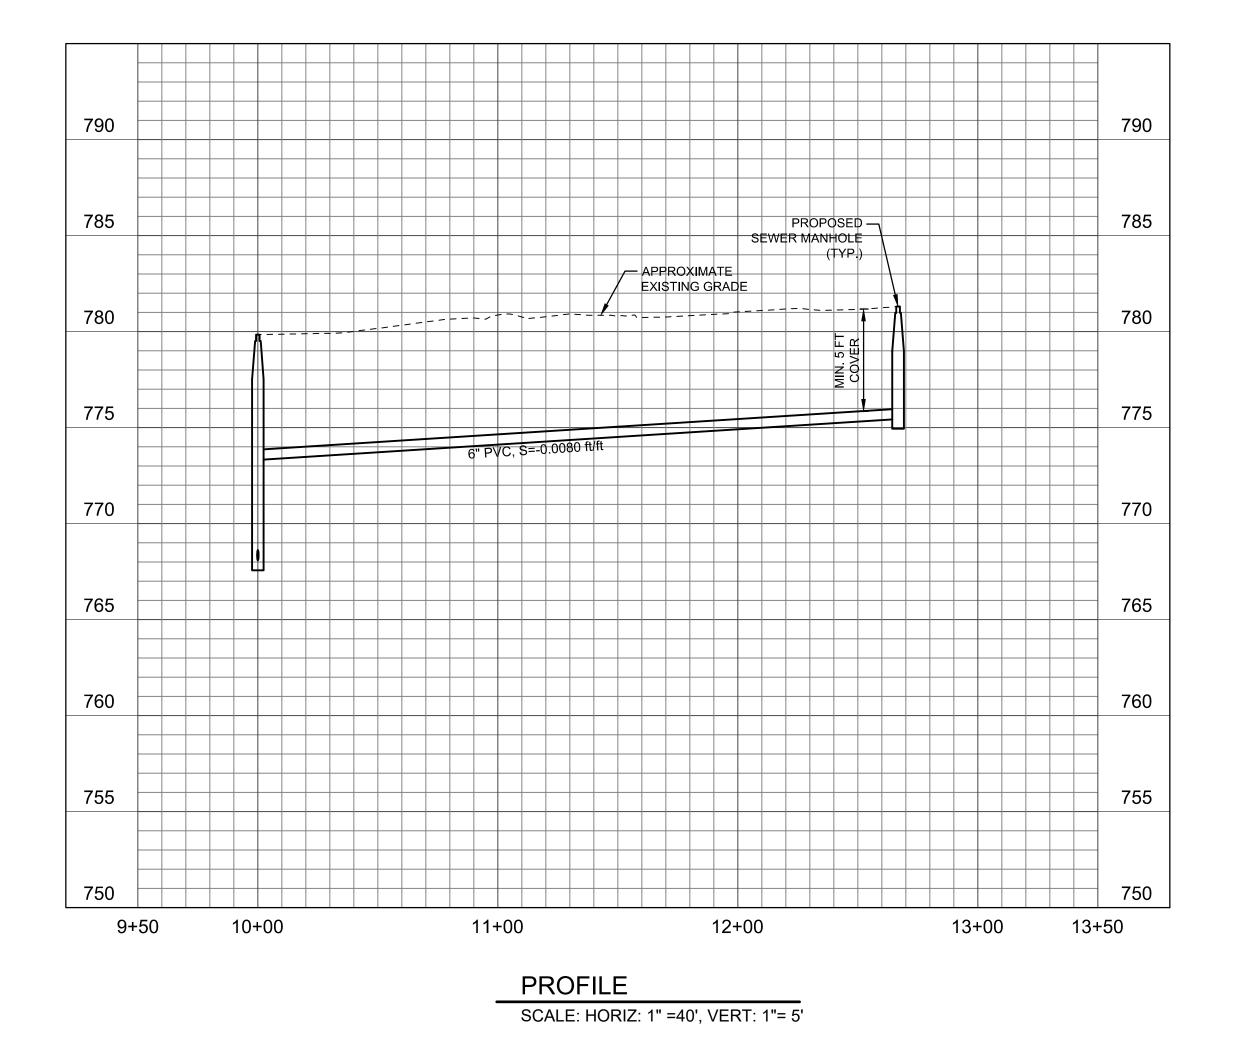

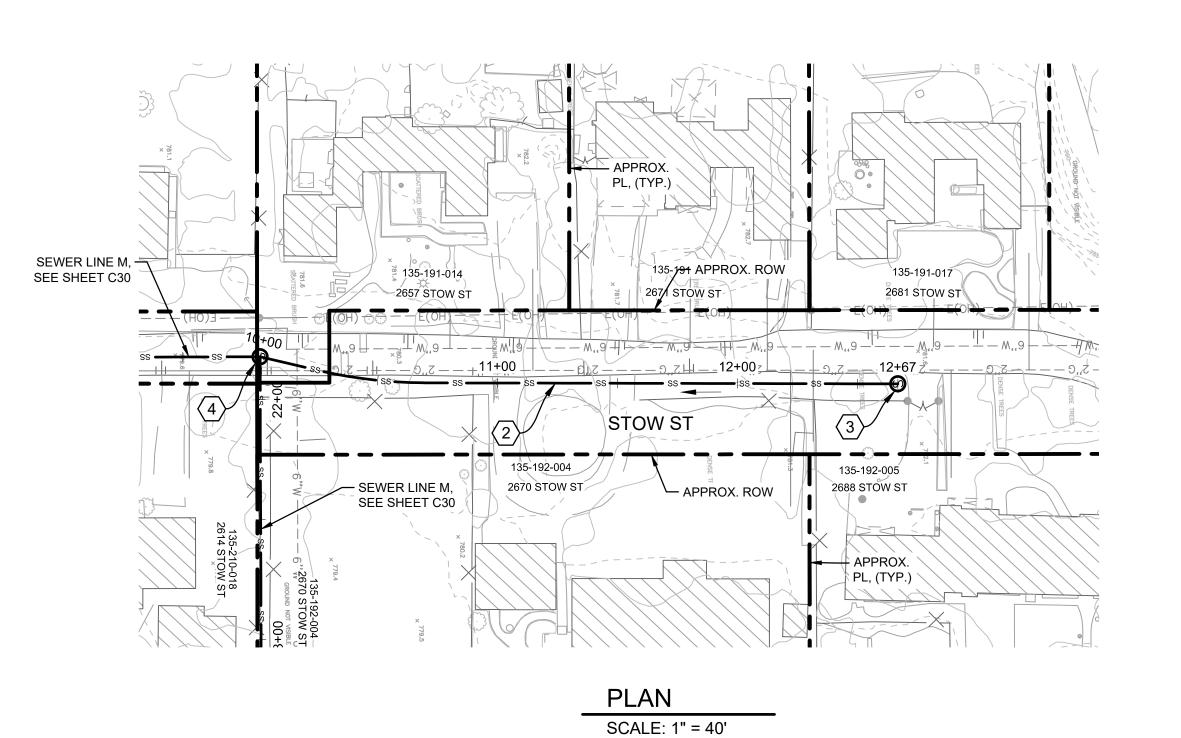


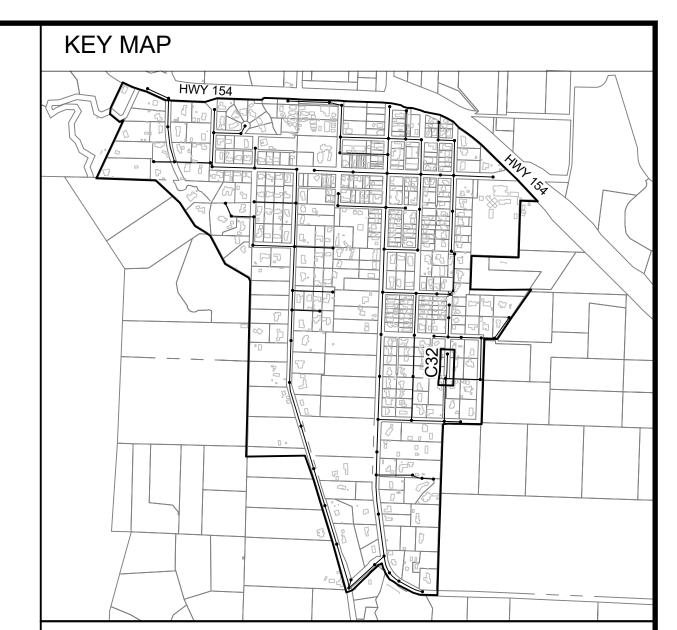

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (2) CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- (4) CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- (5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

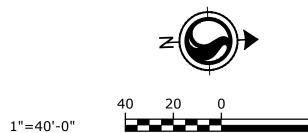

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ	WARNING
					0 ½ 1
			DRAFTED BY:	VH	IF THIS BAR DOES
			CHECKED BY:	ALG/ GA	NOT MEASURE 1" THEN DRAWING IS
<u> </u>			DATE:	06/28/2022	NOT TO SCALE
ΖО.	DATE	REVISIONS	DATE:	06/28/2022	NOT TO SCA




LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441


LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE YOUT PLAN AND PROFILE STA 10+00/FO STA 12+67 STOW STREET

PROJECT NO. 184031368 DWG NO. C32

SHT. 34 OF 54

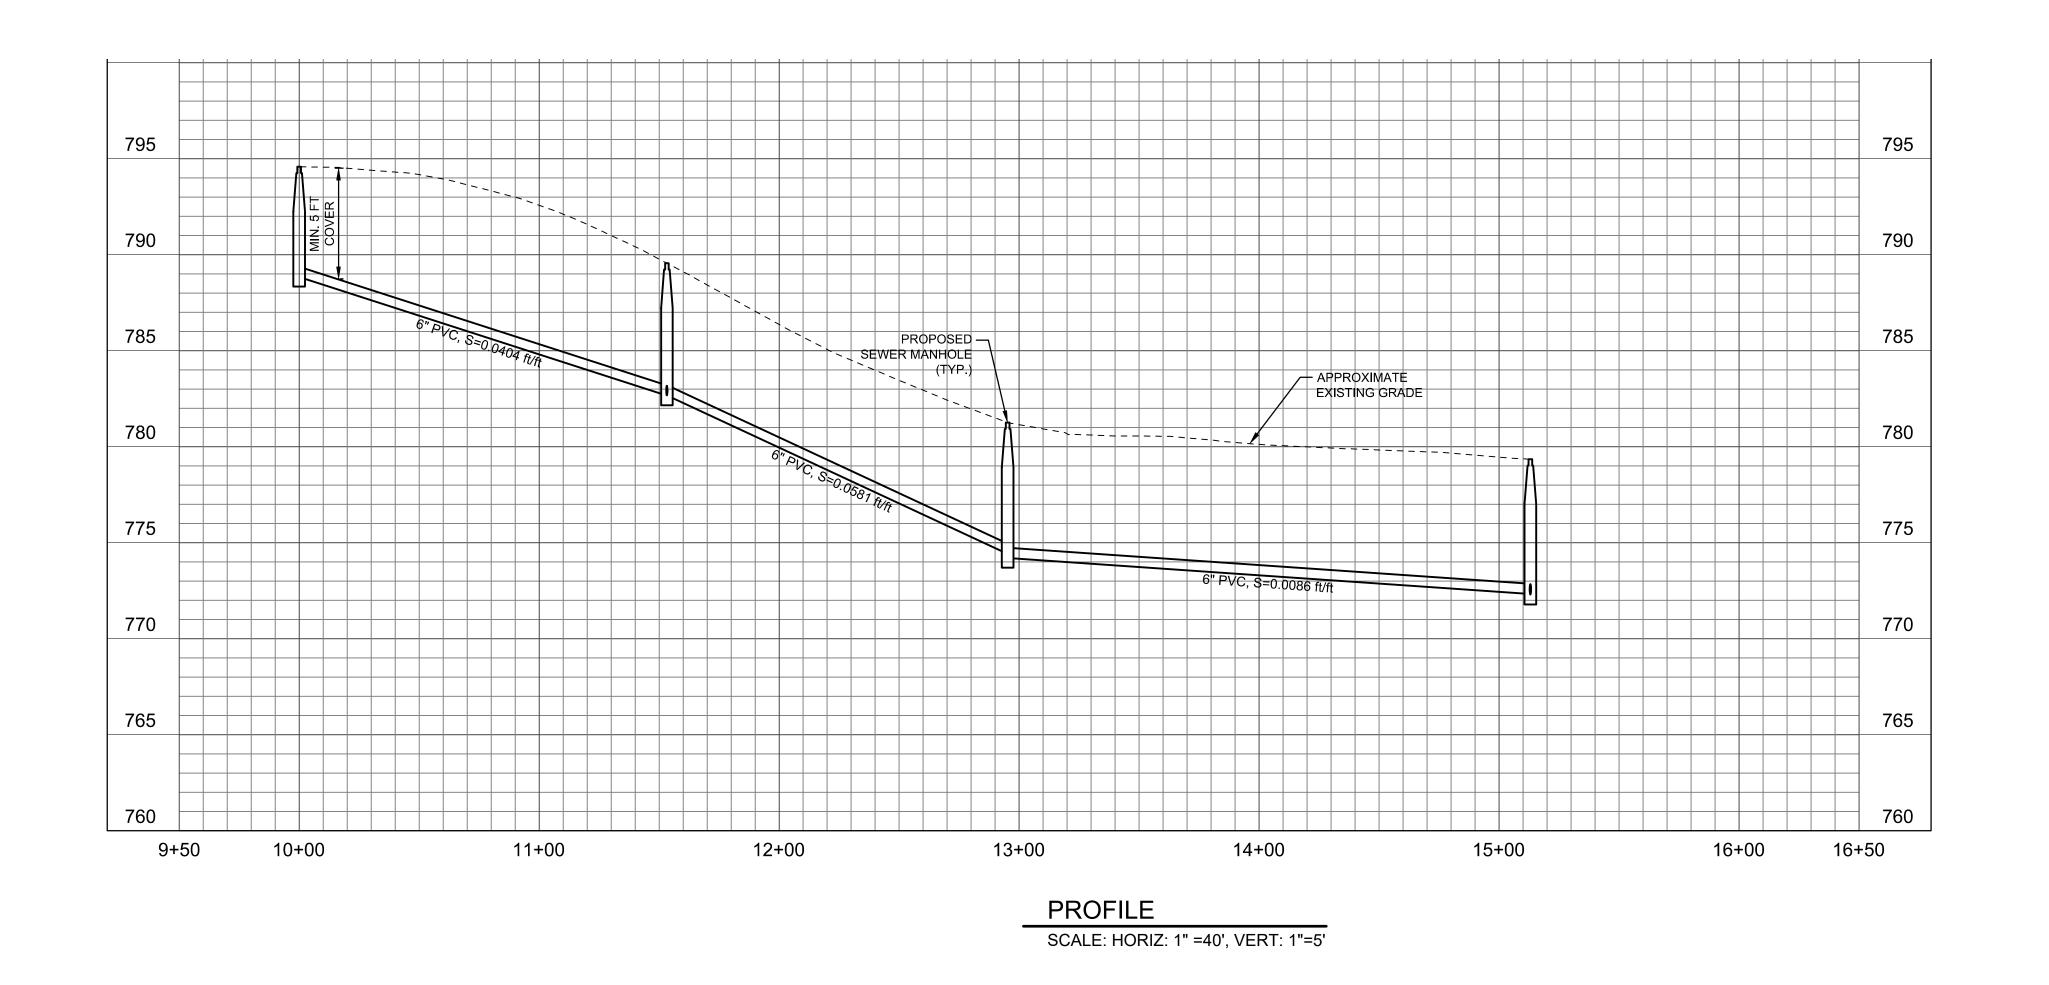

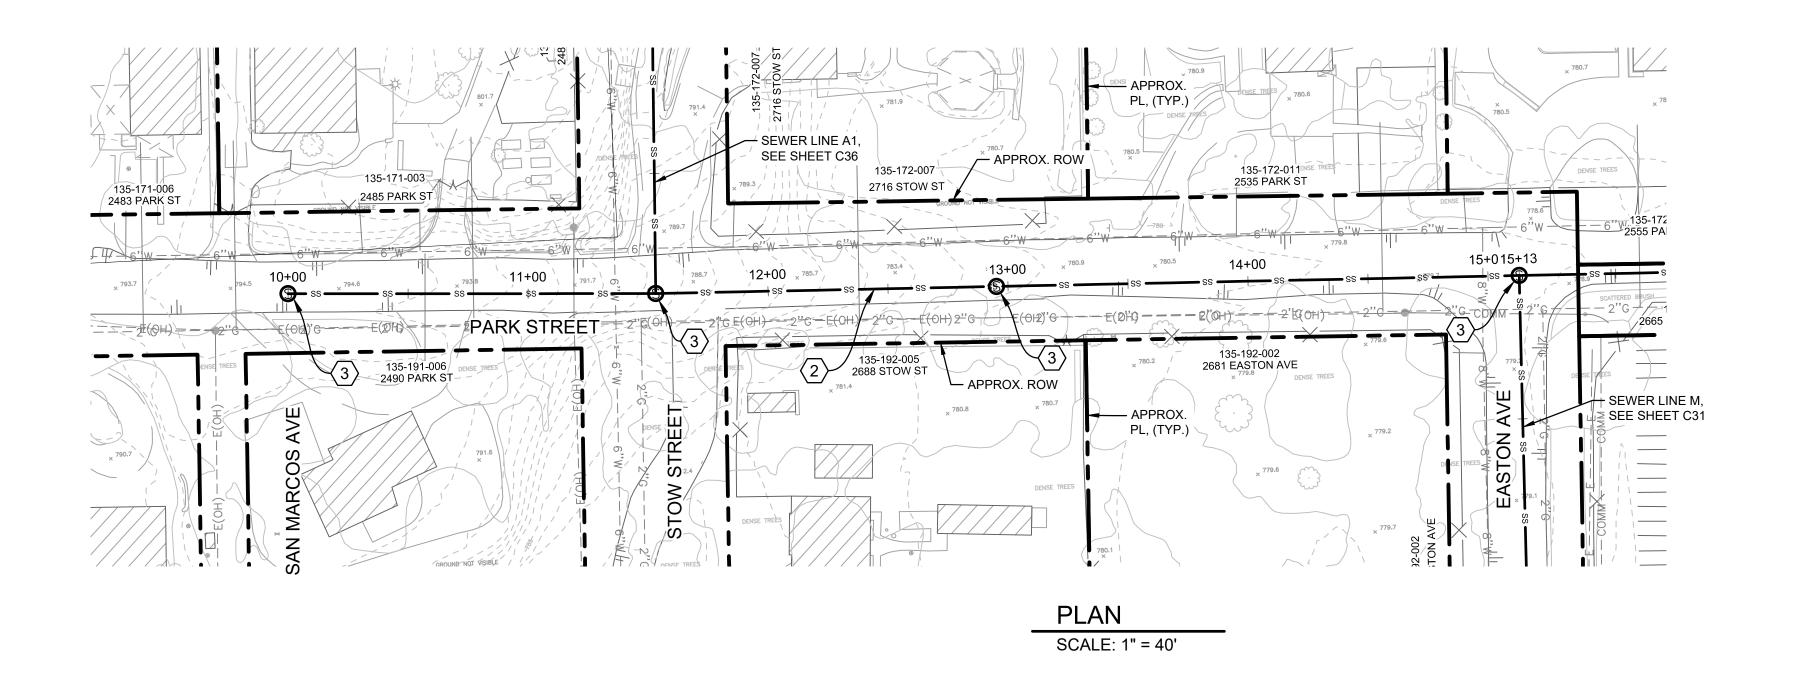


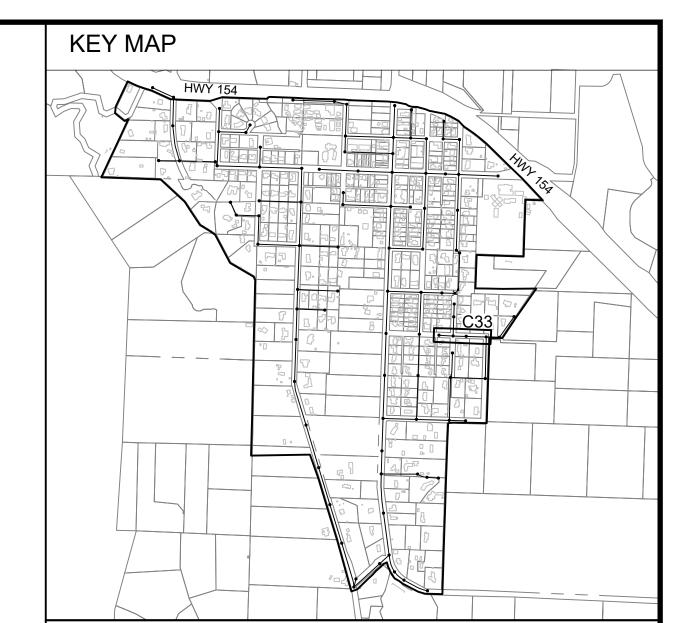

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\langle 2 
  angle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- 5 CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- $\fbox{6}$  CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



1"=40'-0"

40 20 0 4

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
NO.	DATE	REVISIONS	DATE:	06/28/2022



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE Z
PLAN AND PROFILE
STA 10+00 TO STA 17+25
PARK STREET

PROJECT NO.

184031368


DWG NO. C33

SHT. 35 OF 54

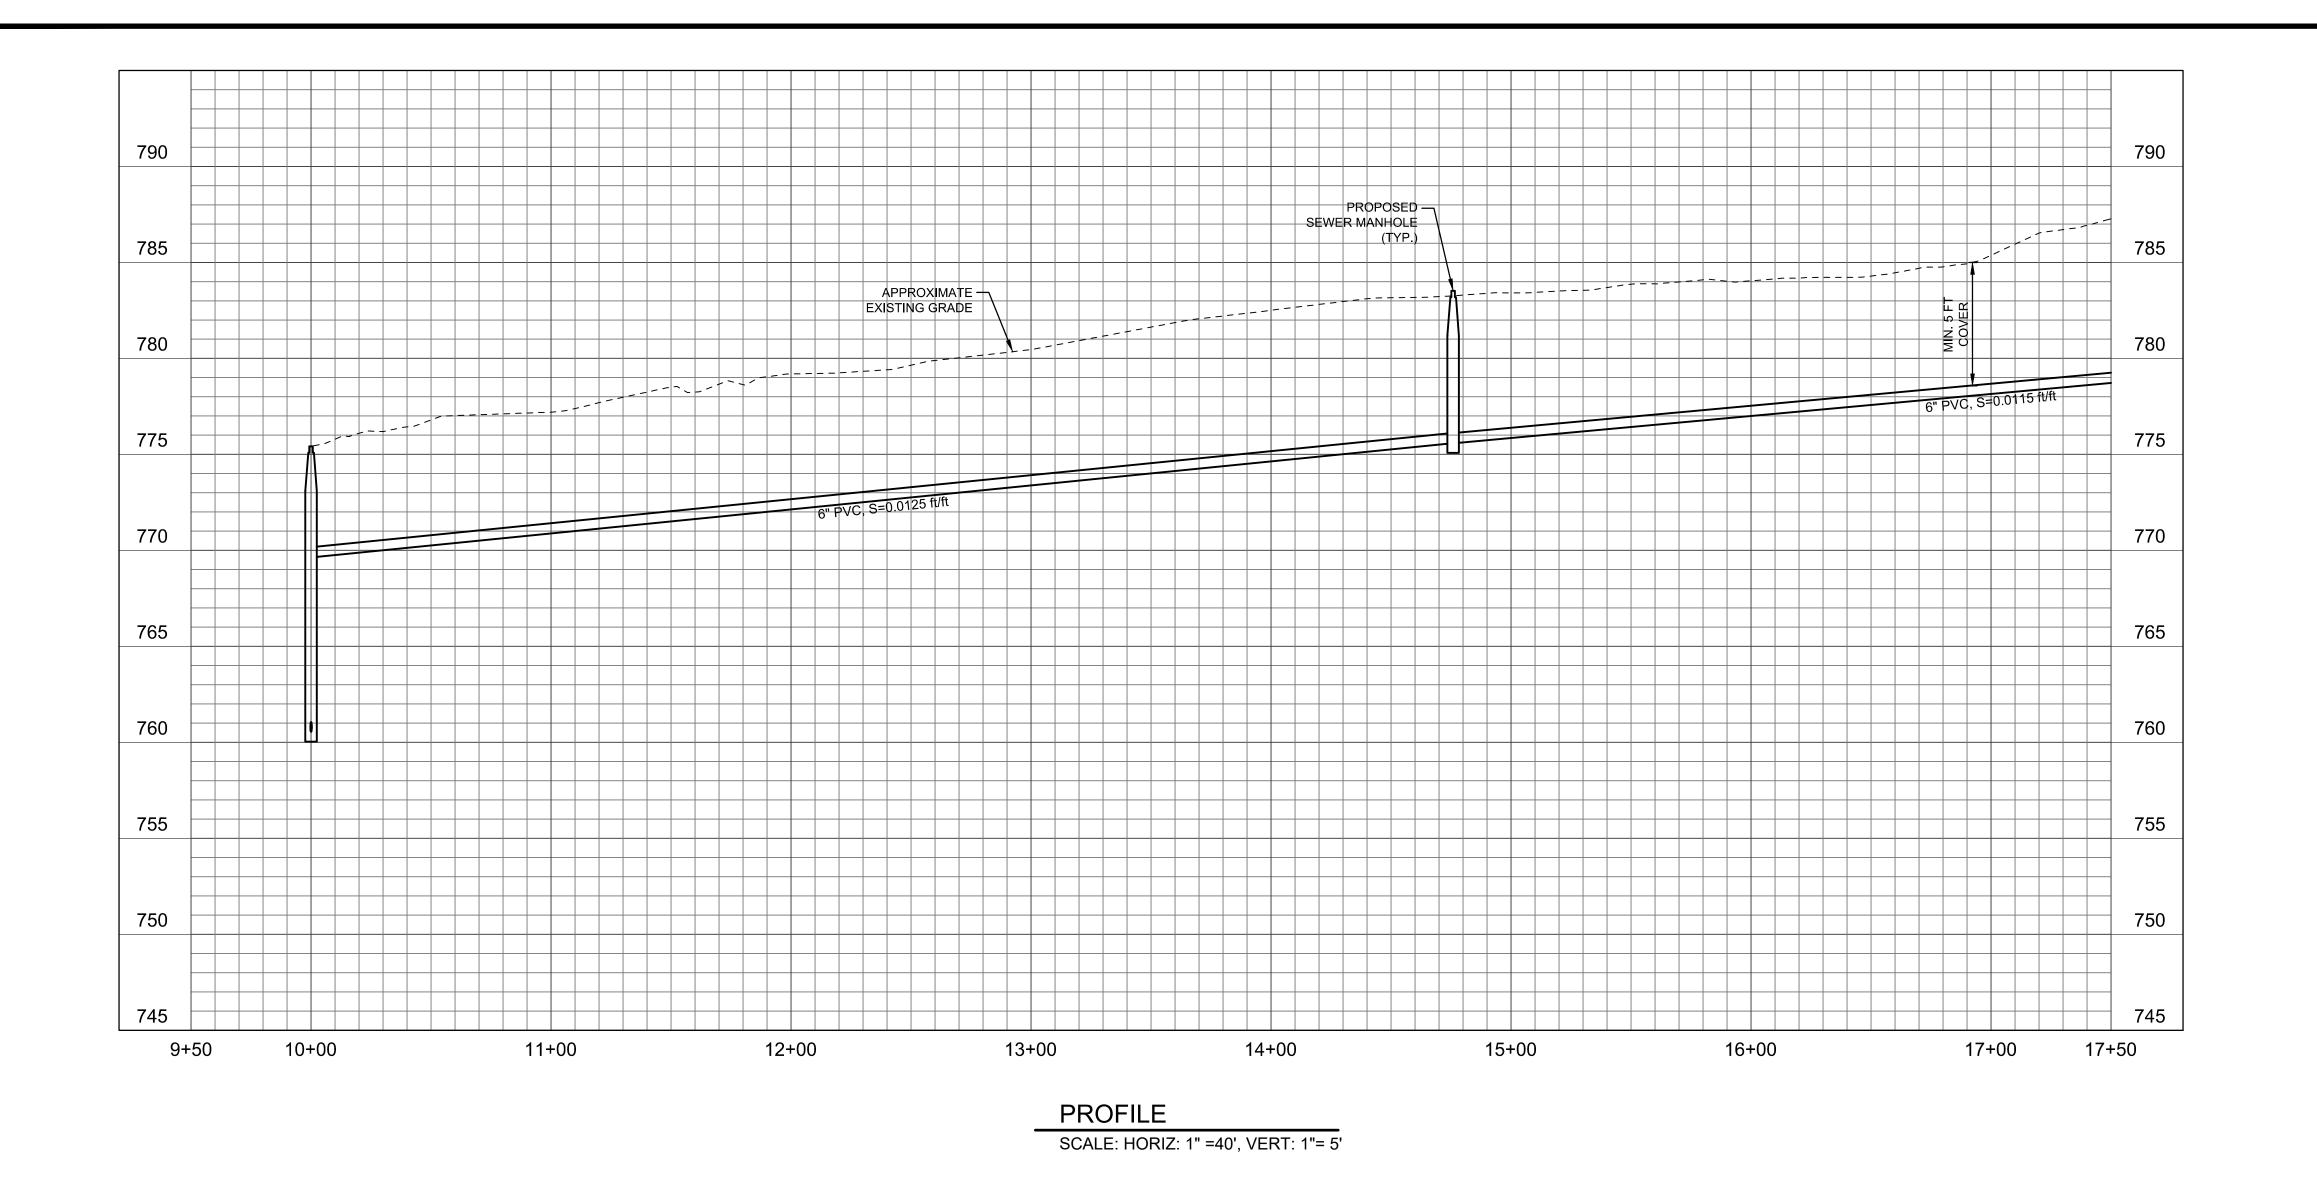

SEWER LINE M, SEE SHEET C29 135-191-018 135-210-041 ==135-191-0<u>1</u>0 135-191-0 2655 SAN MARCOS AVE 2621 SAN MARCOS AVE 2445 SANTA YNEZ ST 2641 SAN MARCOS AVE -\$.,c - - 5,,c - - 5,,c - - - 5,,c - - - - 5 SANTA YNEZ 135-210-027 SAN MARCOS AVE 3 135-191-015 2656 SAN MARCOS AVE -135-191-019 2485 SANTA YNEZ ST 2638 SAN MARCOS AVE OH) — — -2670 SAN MARCOS AVE APPROX. ROW PL, (TYP.) PLAN

SCALE: 1" = 40'

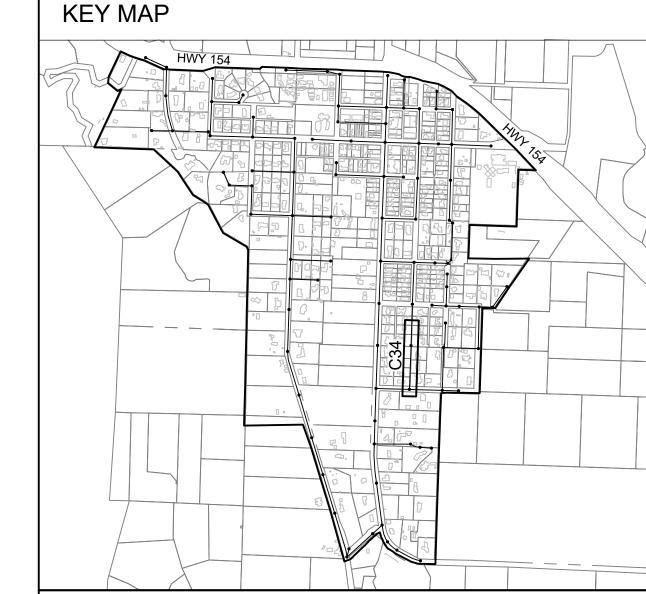

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (2) CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- (4) CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- (5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- $\fbox{6}$  CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

			DECIONED DV	CEP/ JTZ
			DESIGNED BY:	GEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
ZO	DATE	REVISIONS	DATE:	06/28/2022

WARNING IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS NOT TO SCALE




LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE WOT STA 10+00 TO STA 17+50 FOR SAN MARCOS AVENUE

PROJECT NO. 184031368 DWG NO. C34

SHT. 36 OF 54

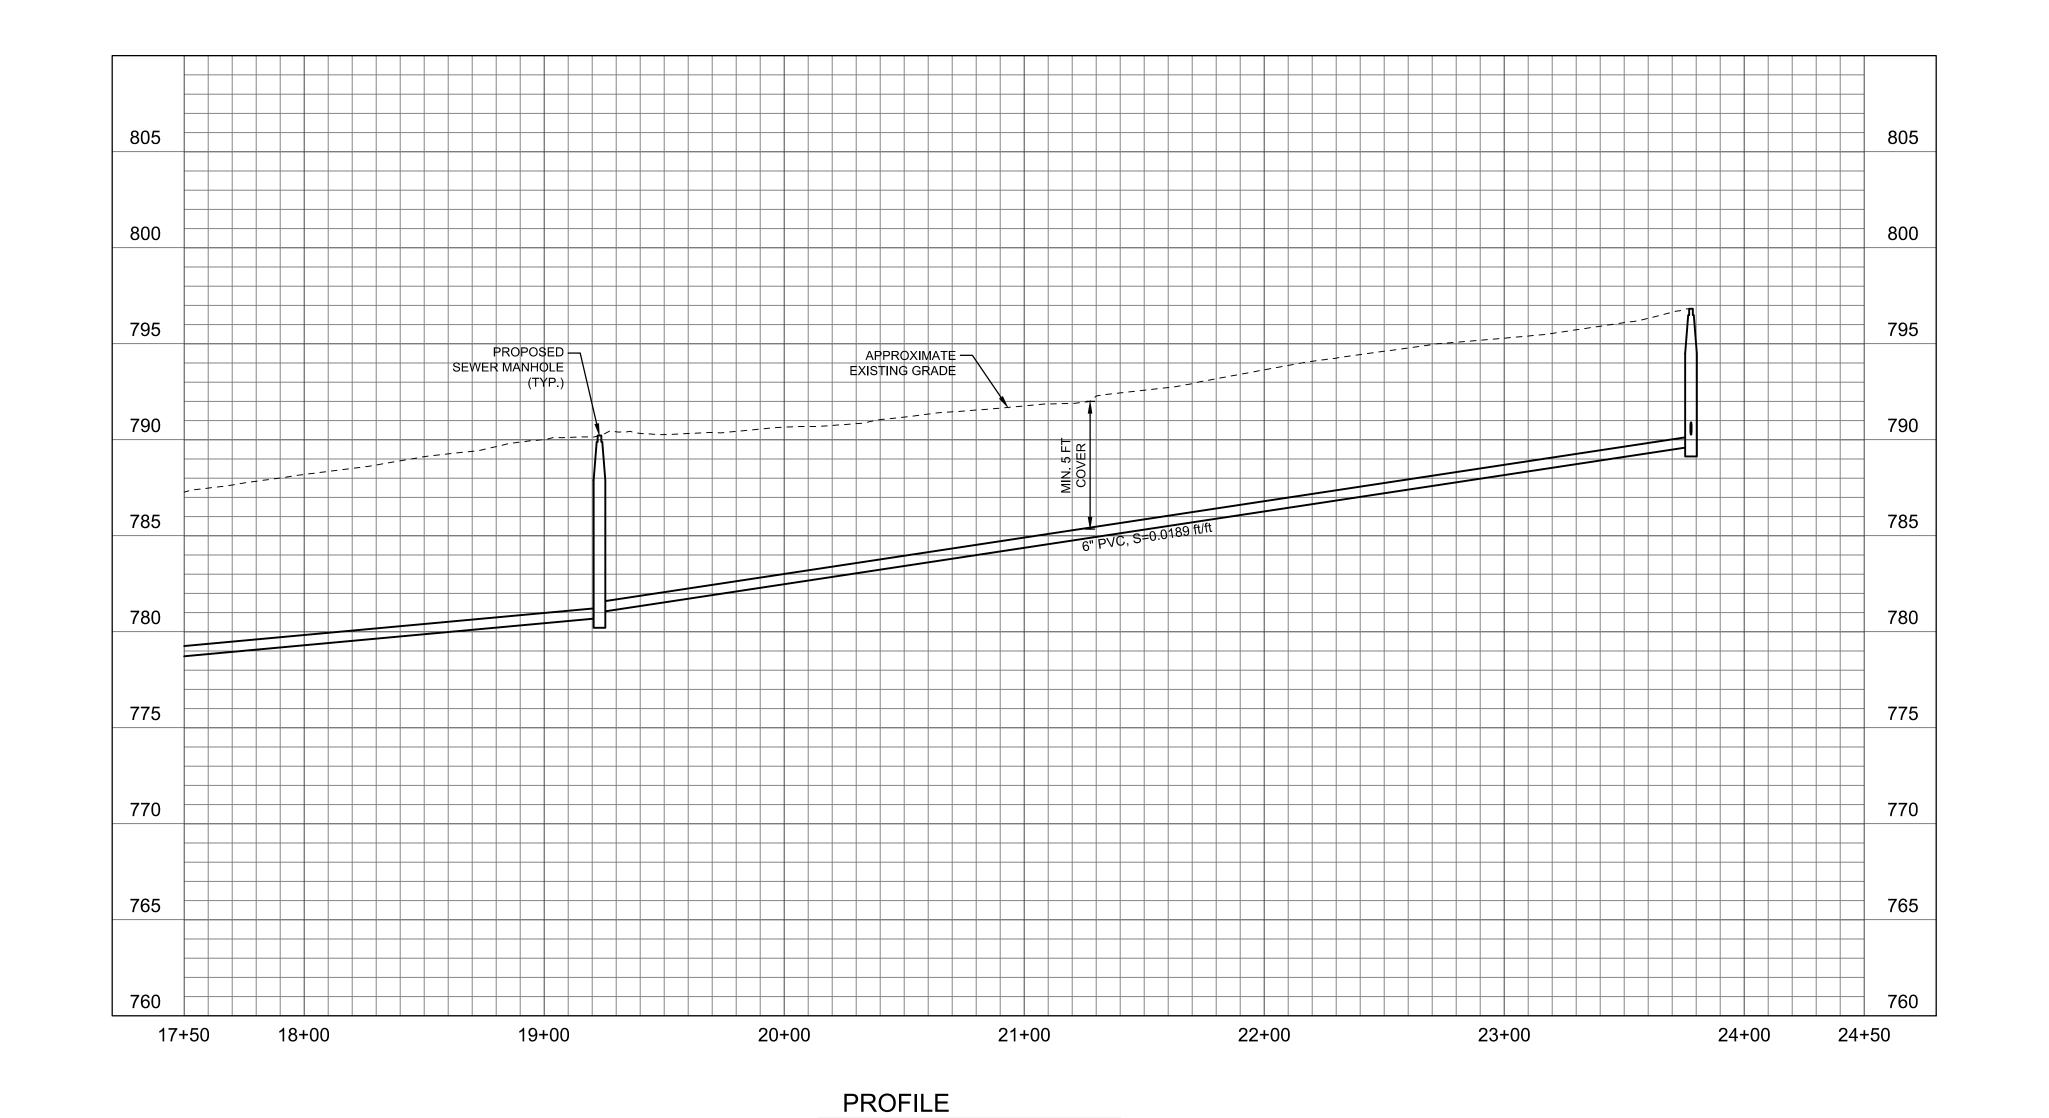

SEWER LINE N.
SEE SHEET C37

APPROX. HOW 38 32 14 100 12 14 14 15 16 16 17

3 22 14 10 12 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17


3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11 15 16 17

3 27 17 PARK ST 30 11

SCALE: 1" = 40'

SCALE: HORIZ: 1" =40', VERT: 1"= 5'

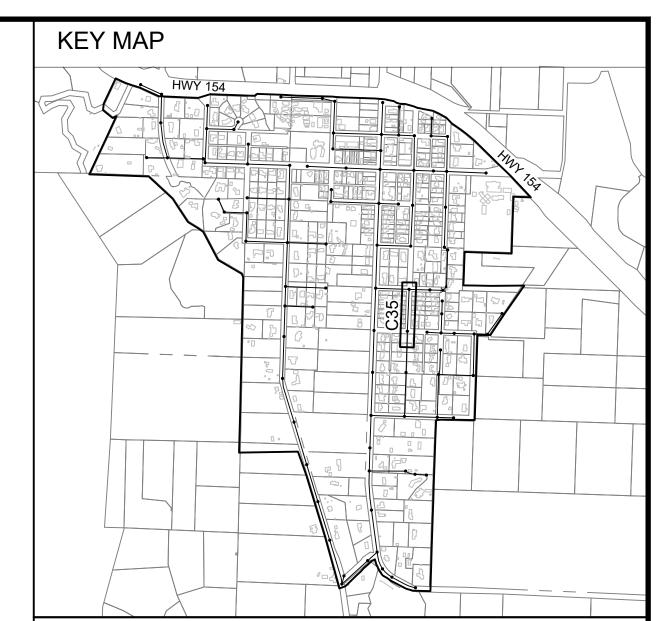

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- (1) CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 2 CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

40 20 0

30% SUBMITTAL

DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE WOT PLAN AND PROFILE STA 17+50 TO STA 23+78
SAN MARCOS AVENUE


PROJECT NO.


184031368

DWG NO. C35

SHT. 37 OF 54

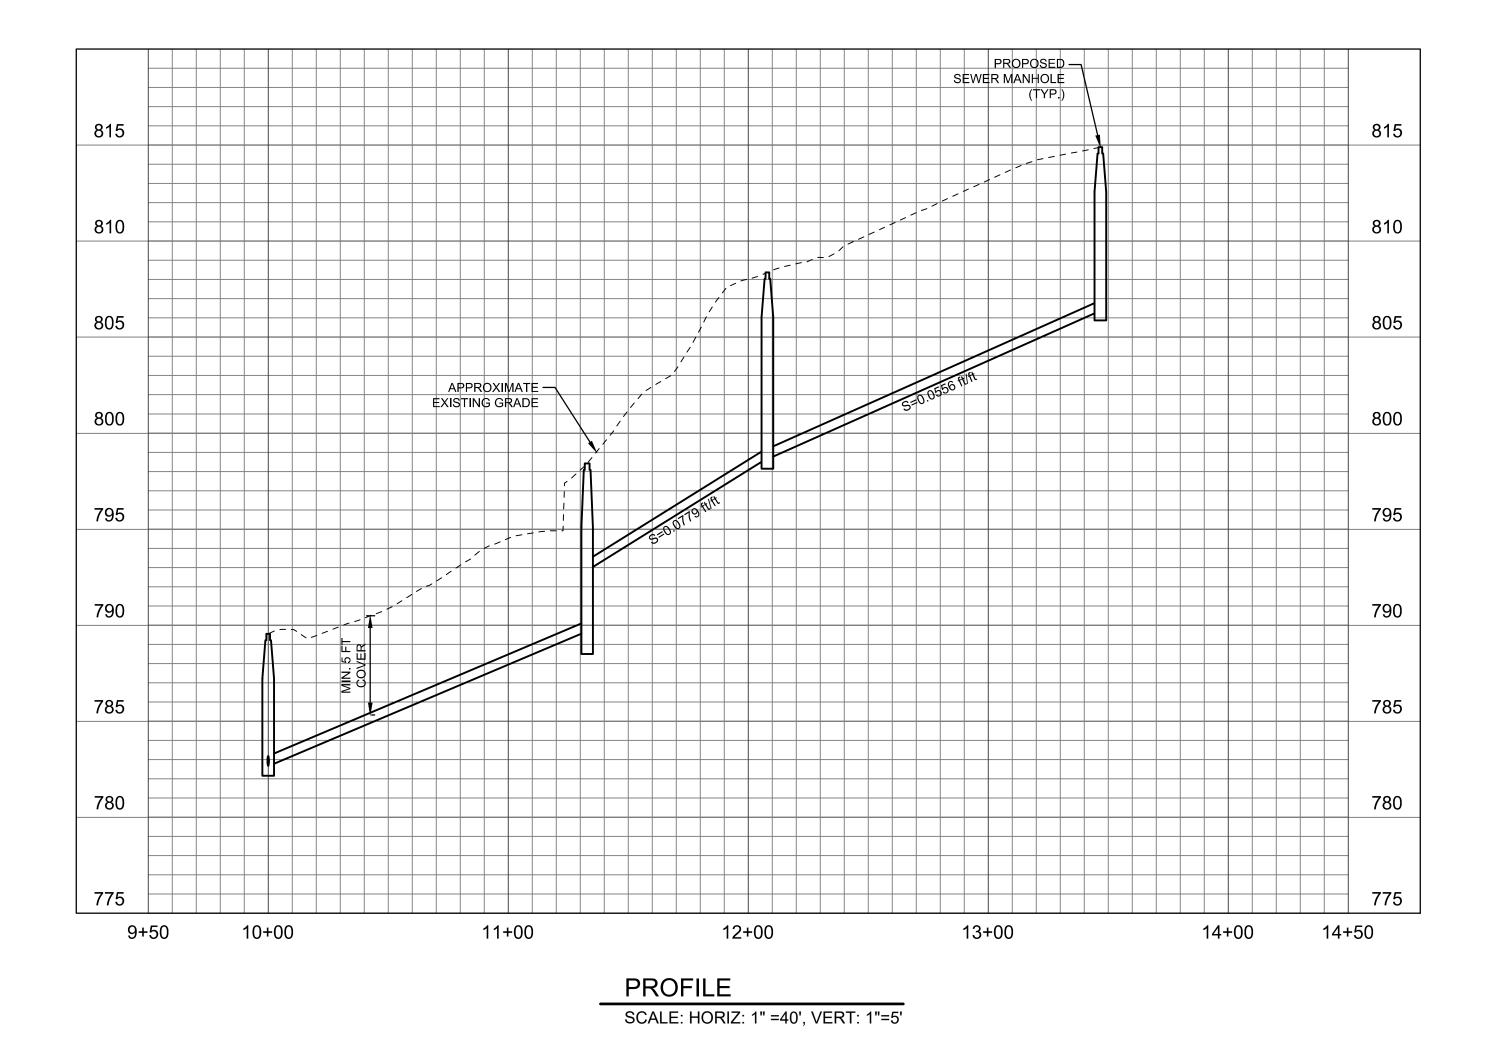

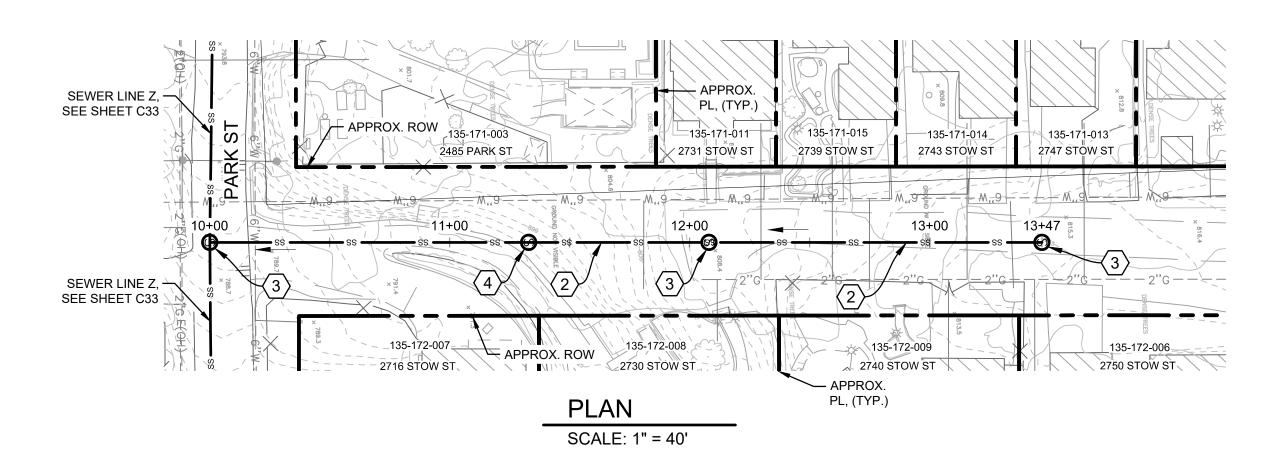

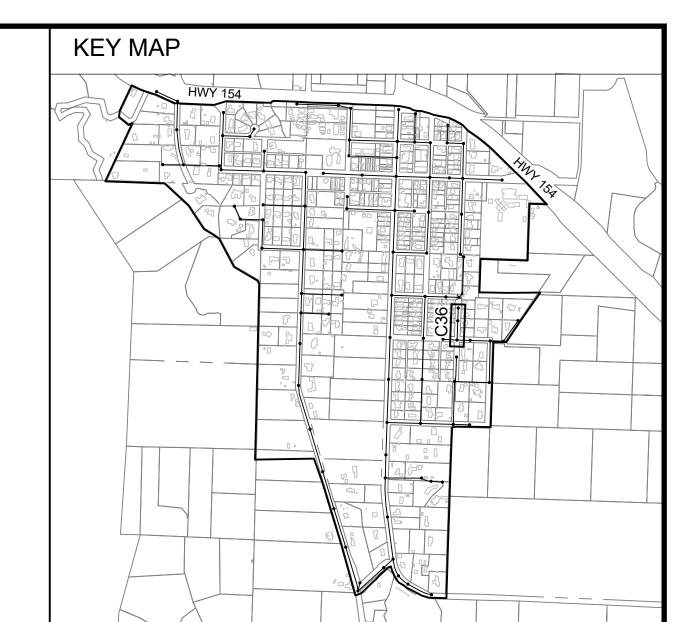

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- (1) CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (2) CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 3 CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\overline{\langle 5 \rangle}$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

40 20 0

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
NO.	DATE	REVISIONS	DATE:	06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE A1 PLAN AND PROFILE STA 10+00 TO STA 13+47 DRIVEWAY TO PARK STREET


PROJECT NO.

184031368

DWG NO. C36

SHT. 38 OF 54

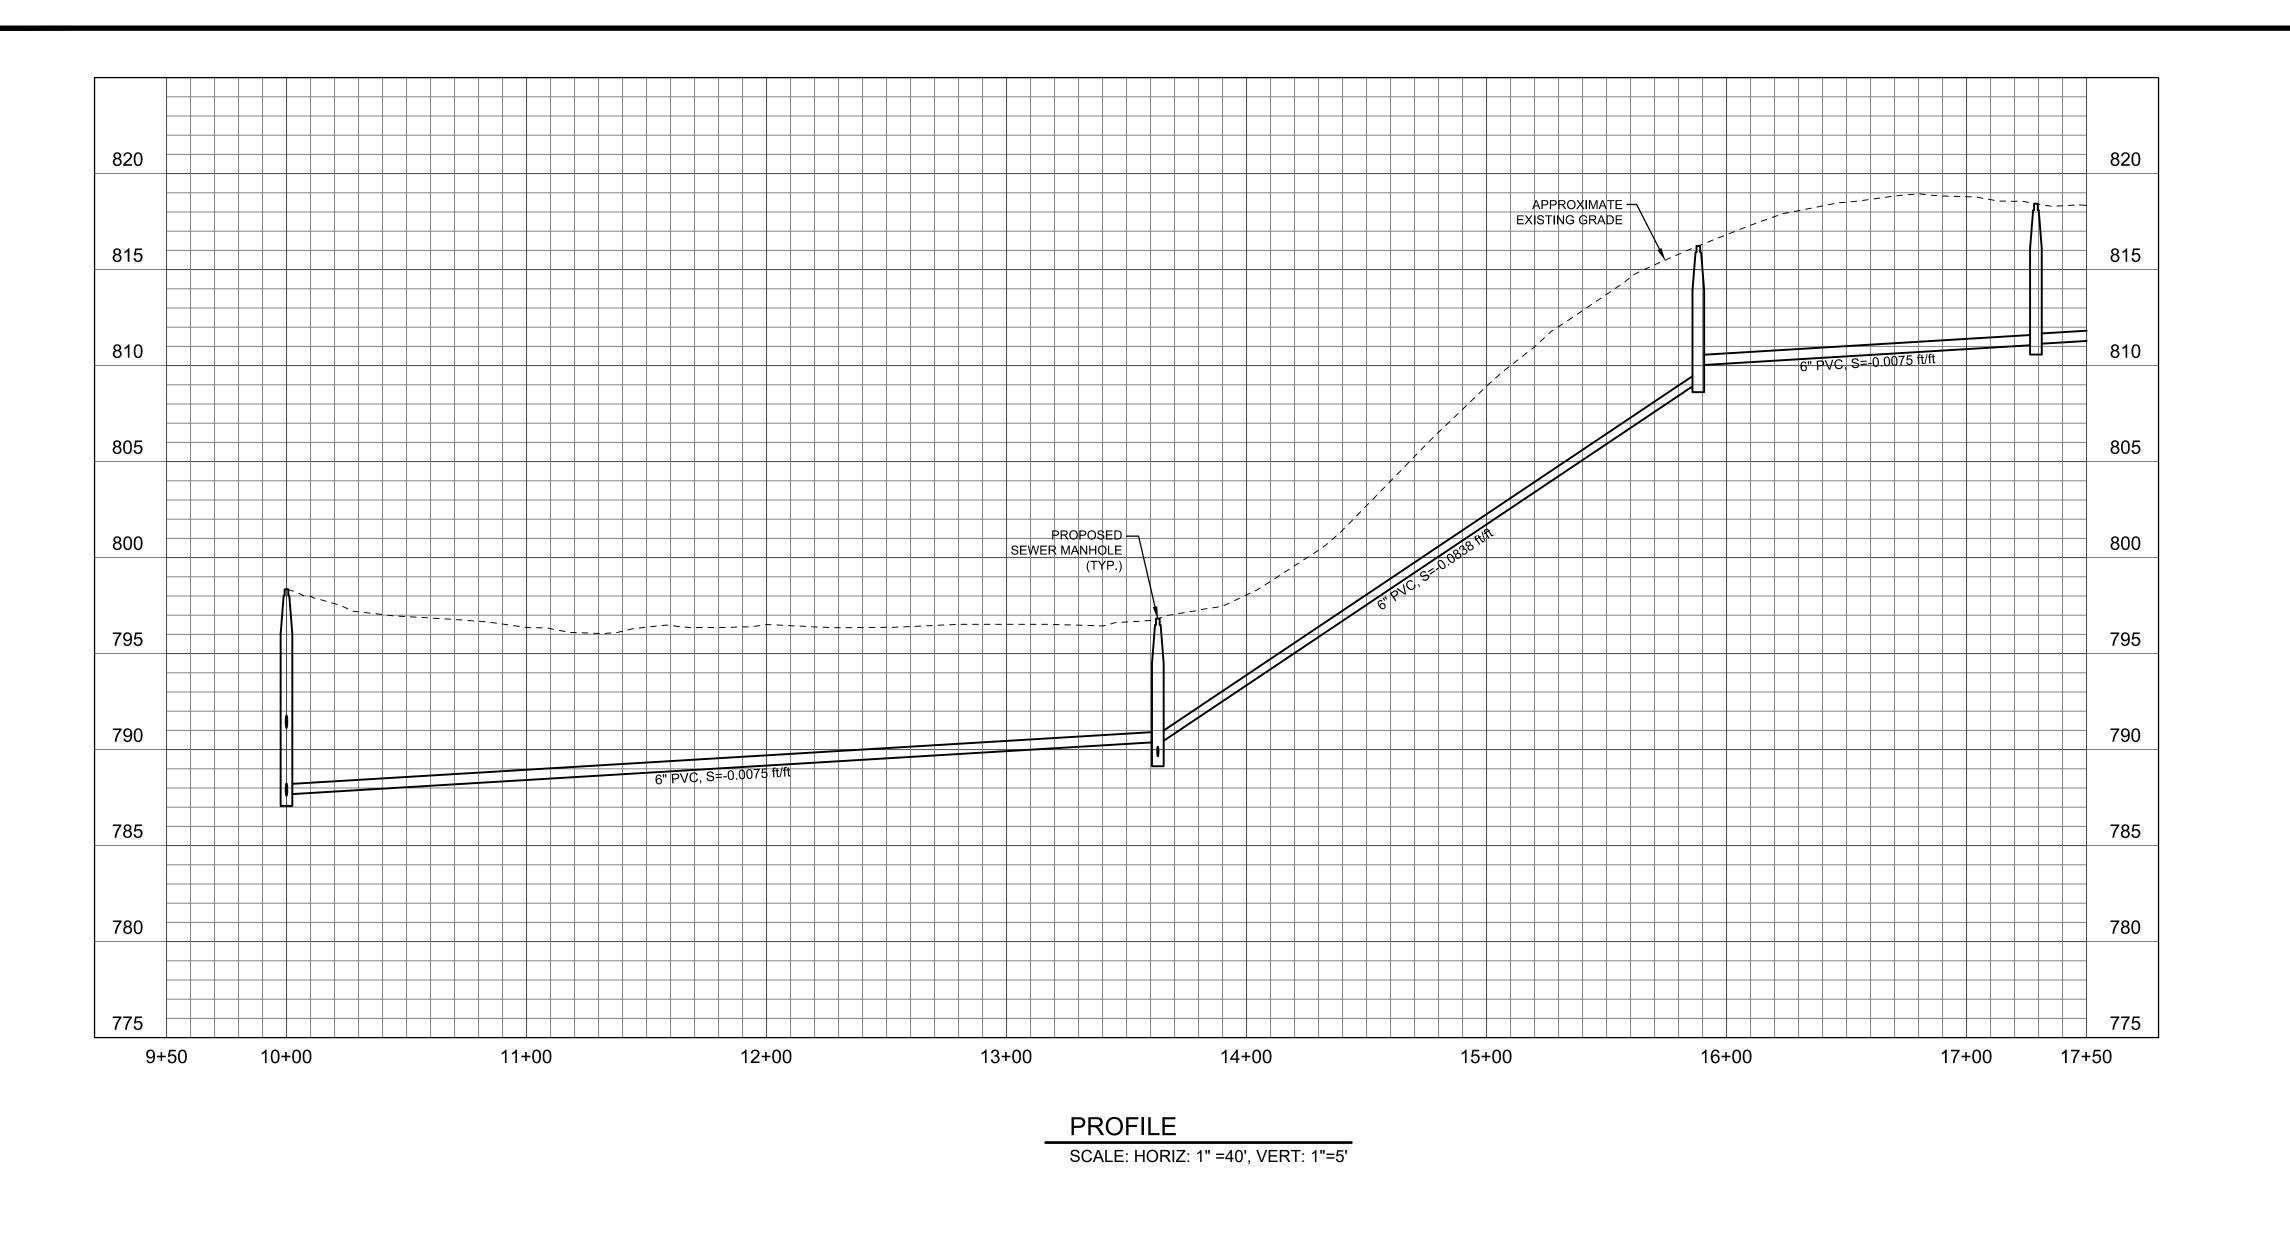

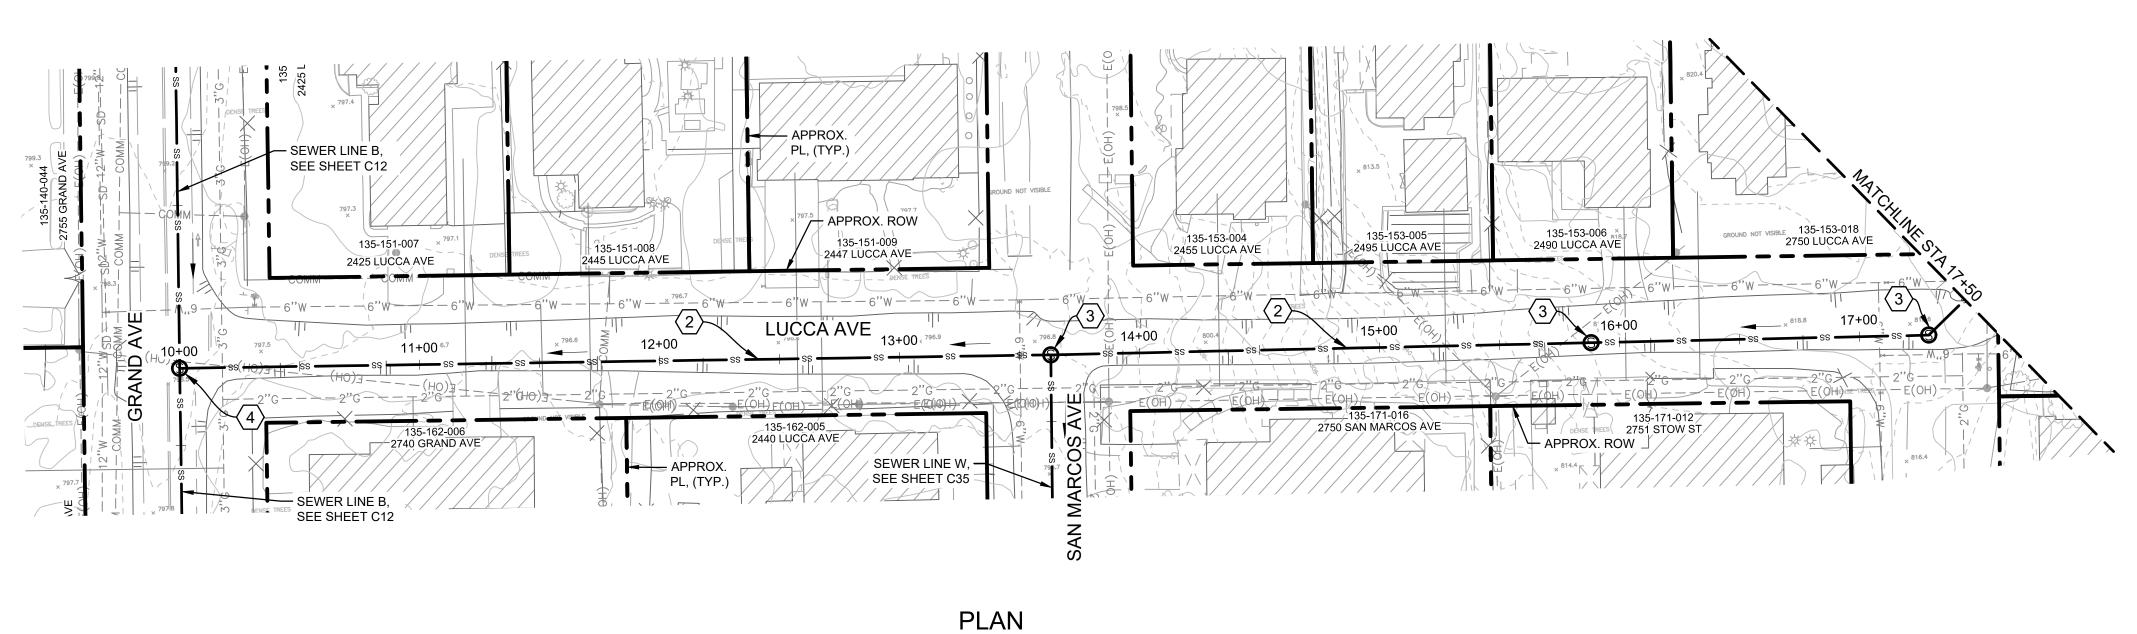

SCALE: 1" = 40'

# 

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\langle 2 
  angle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 3 CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- $\fbox{6}$  CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



40 40'-0"

40 20 0

30% SUBMITTAL

DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE

**Stantec** 

LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE NOT PLAN AND PROFILE STA 10+00 TO STA 17+50
LUCCA AVENUE


PROJECT NO.

184031368

DWG NO. C37

SHT. 39 OF 54

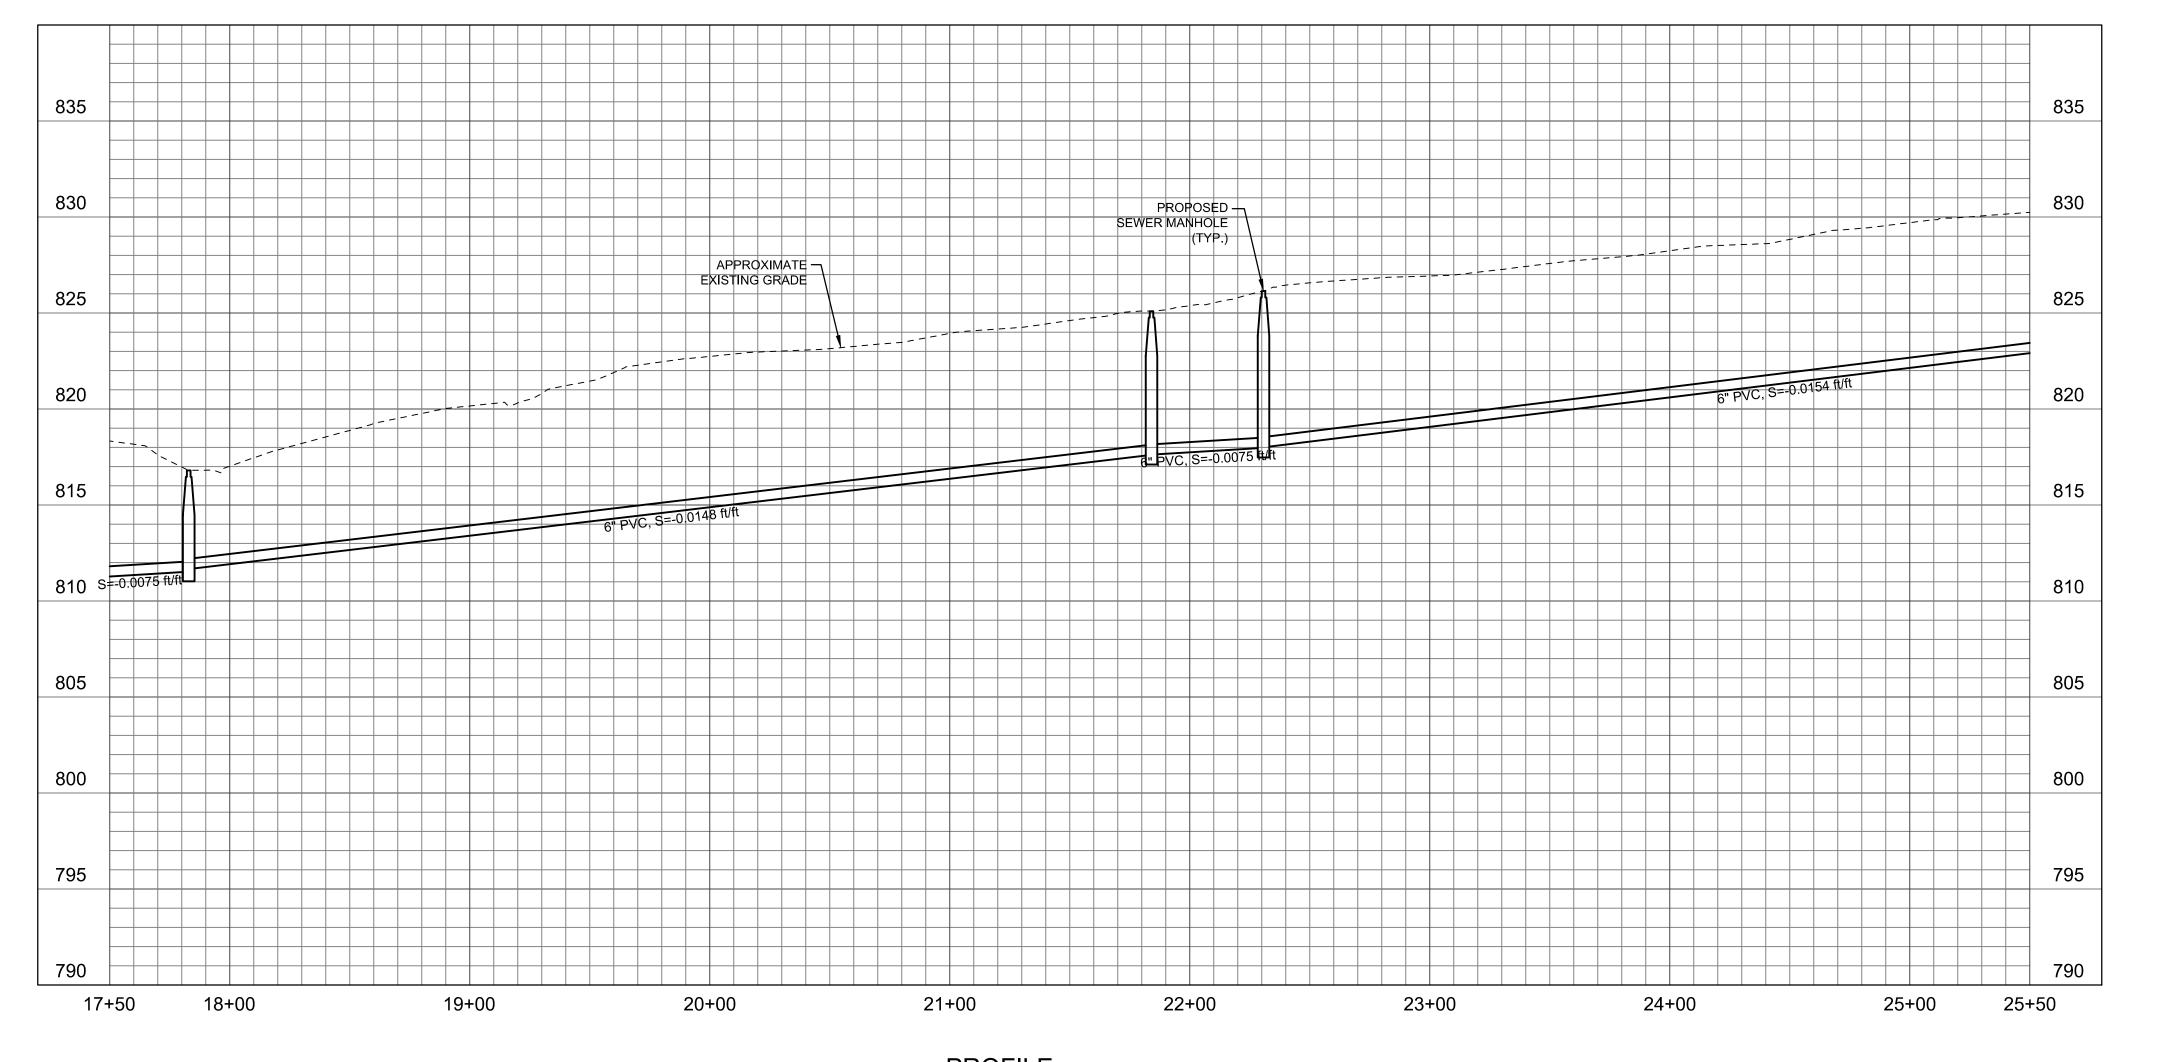

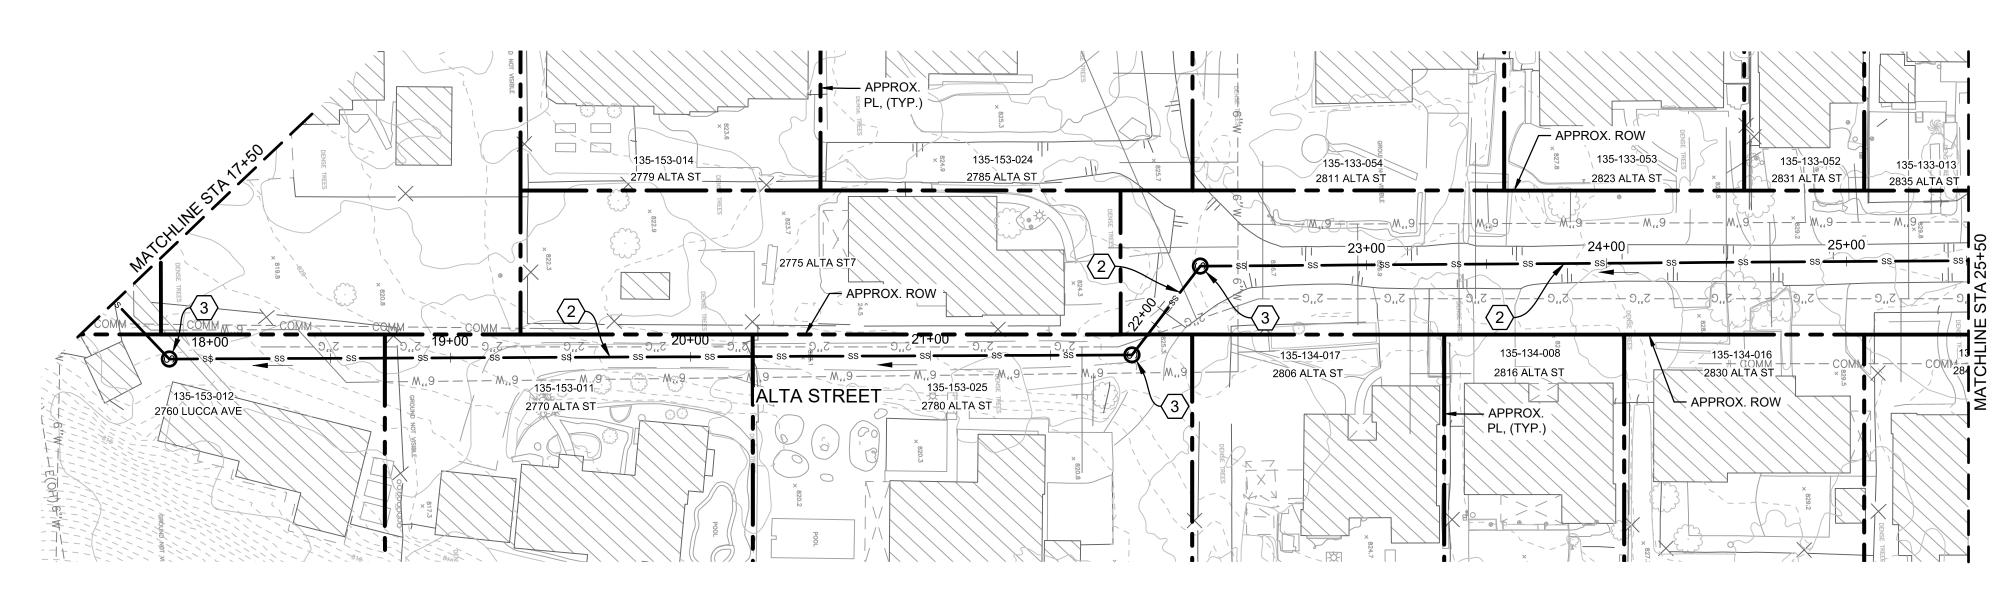

PLAN SCALE: 1" = 40'

30% SUBMITTAL


DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022





LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

## PLAN AND PROFILE STA 17+50 TO STA 25+50 ALTA STREET

PROJECT NO.

184031368

DWG NO. C38

DWG NO. <u>C38</u>
SHT. <u>40</u> OF <u>54</u>

C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.

D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

SHEET CONSTRUCTION NOTES

1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
2 CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
3 CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.

A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE

TO THE ATTENTION OF THE ENGINEER.

APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA

CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT

AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO

B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN

ARE SUBJECT TO CHANGE DURING FINAL DESIGN.


ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND


**GENERAL SHEET NOTES** 

**KEY MAP** 

5 CONSTRUCT LIET STATION WITH 5 FOOT DIAMETER WET.

6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

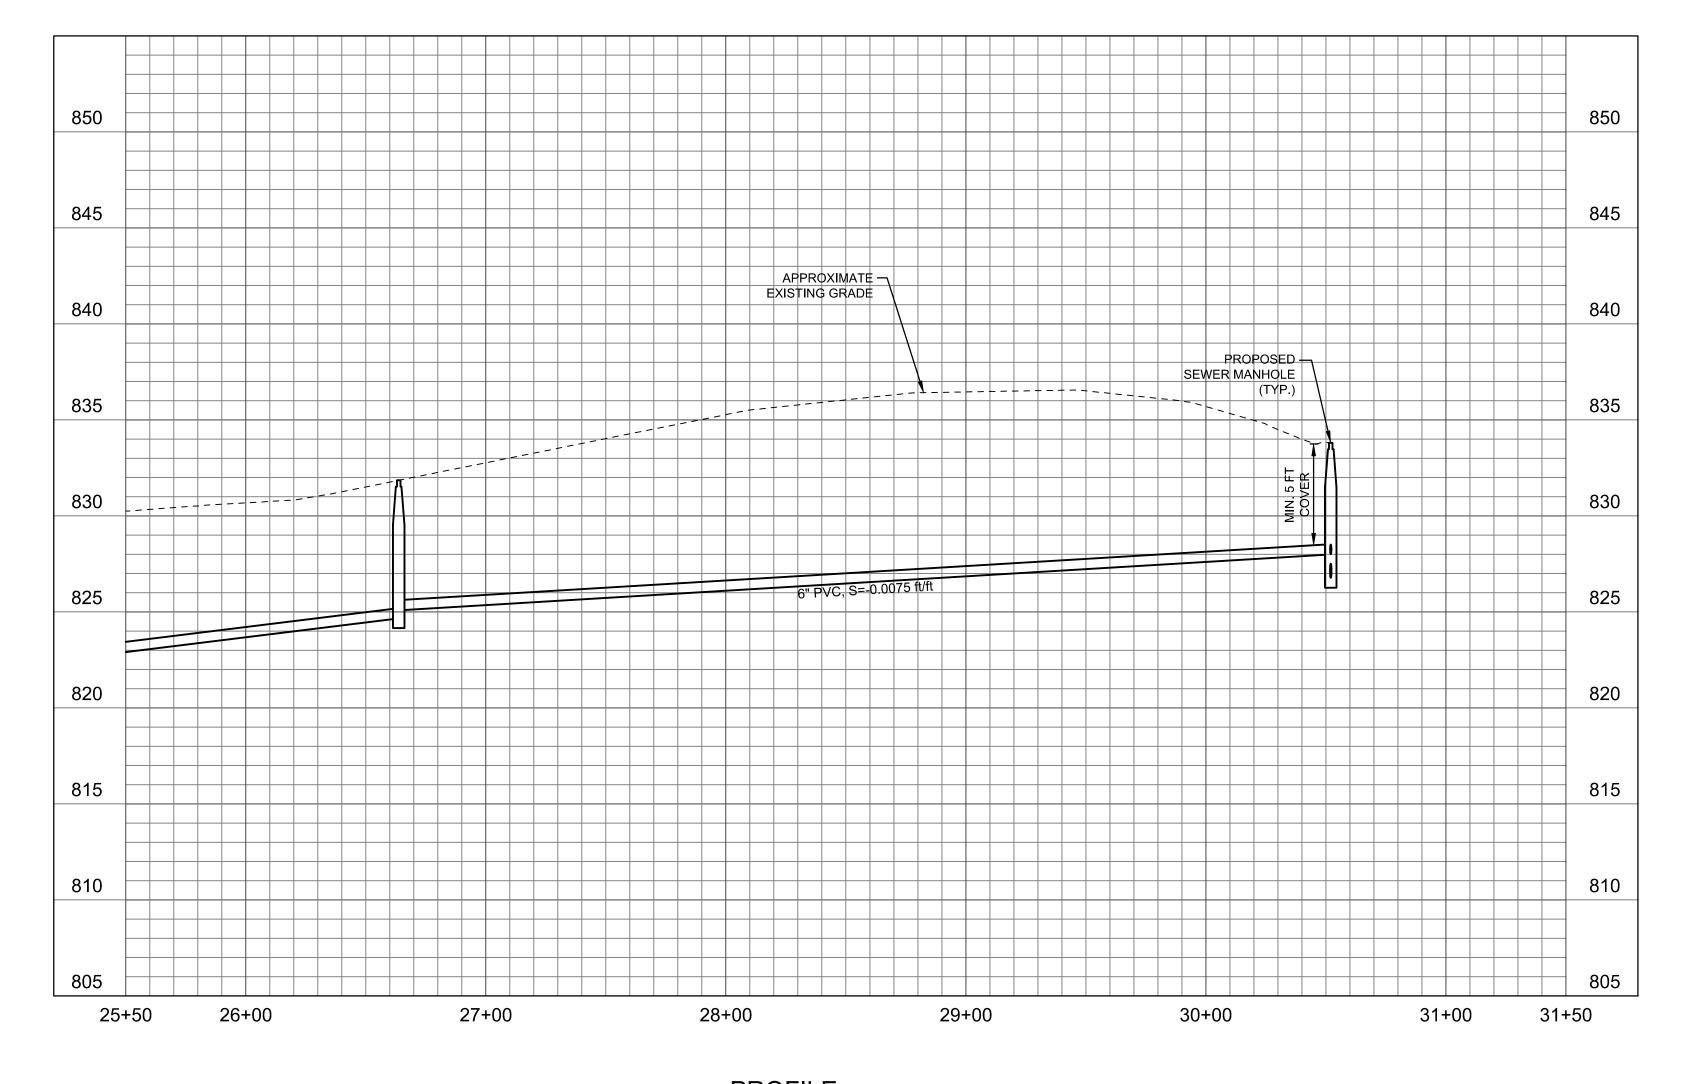

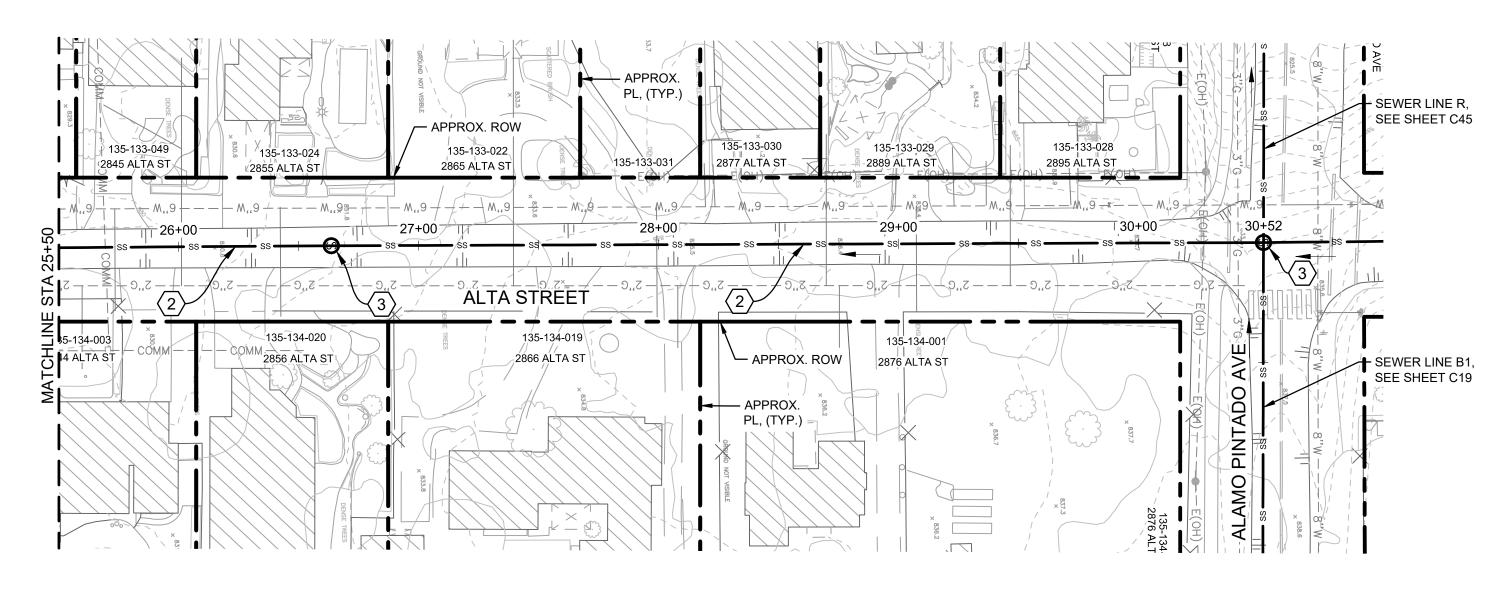

PLAN SCALE: 1" = 40'

30% SUBMITTAL


DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022





LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

PLAN AND PROFILE

STA 25+50 TO STA 30+52

ALTA STREET

PROJECT NO. 184031368

DWG NO. <u>C39</u>
SHT. <u>41</u> OF <u>54</u>

D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

SHEET CONSTRUCTION NOTES

1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
2 CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
3 CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.

GENERAL SHEET NOTES

A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE

TO THE ATTENTION OF THE ENGINEER.

APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE

UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT

B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR

ARE SUBJECT TO CHANGE DURING FINAL DESIGN.

CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND


C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE


**KEY MAP** 


4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.

(5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.

6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

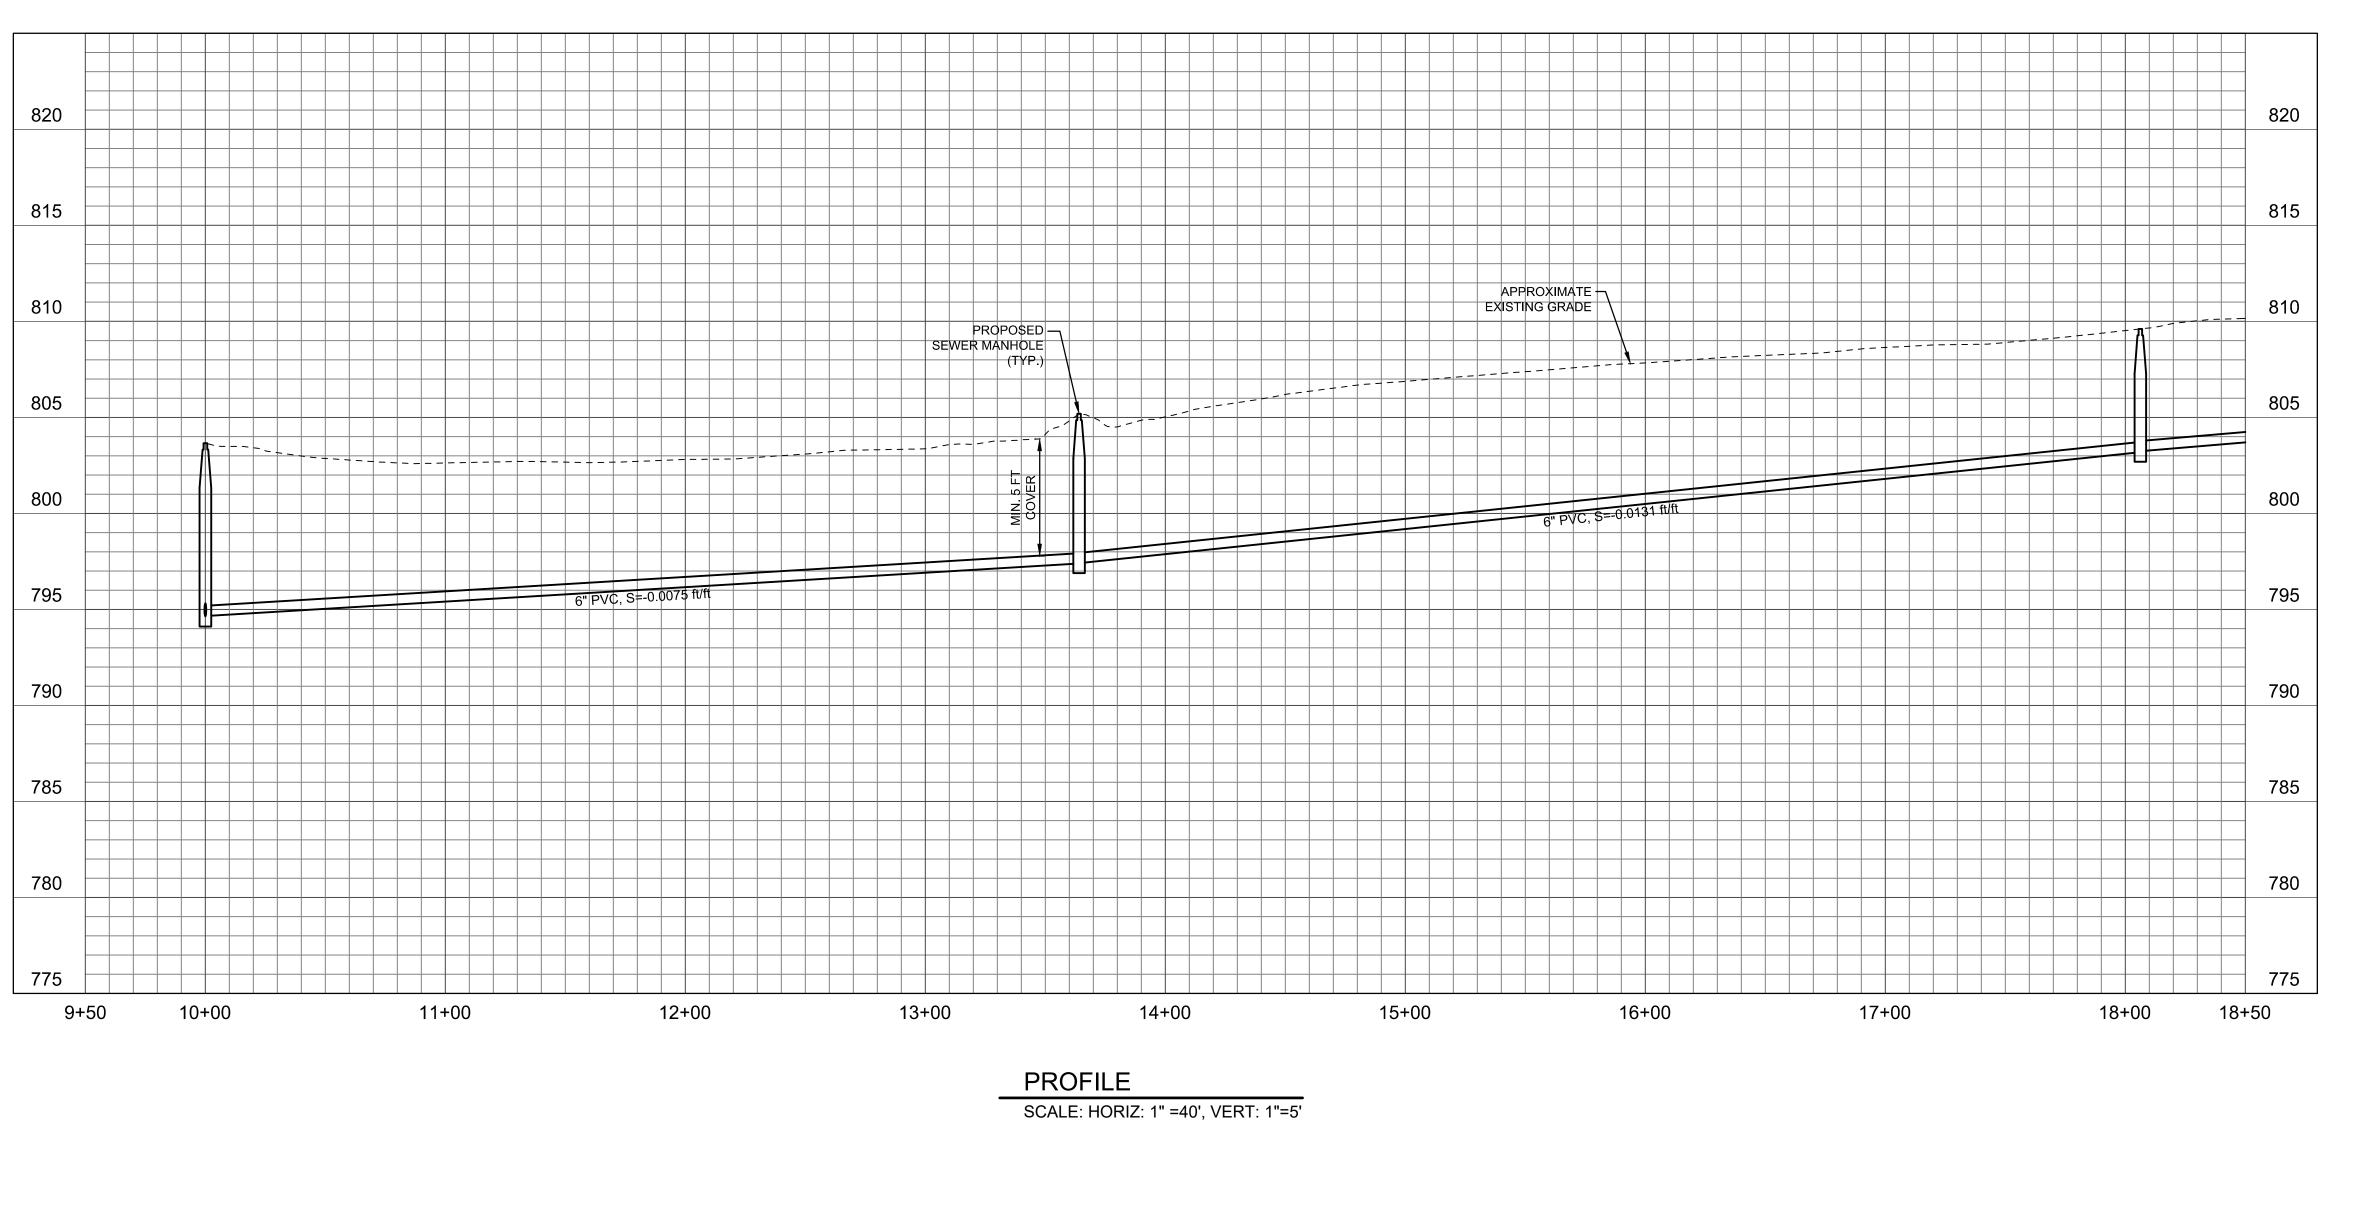

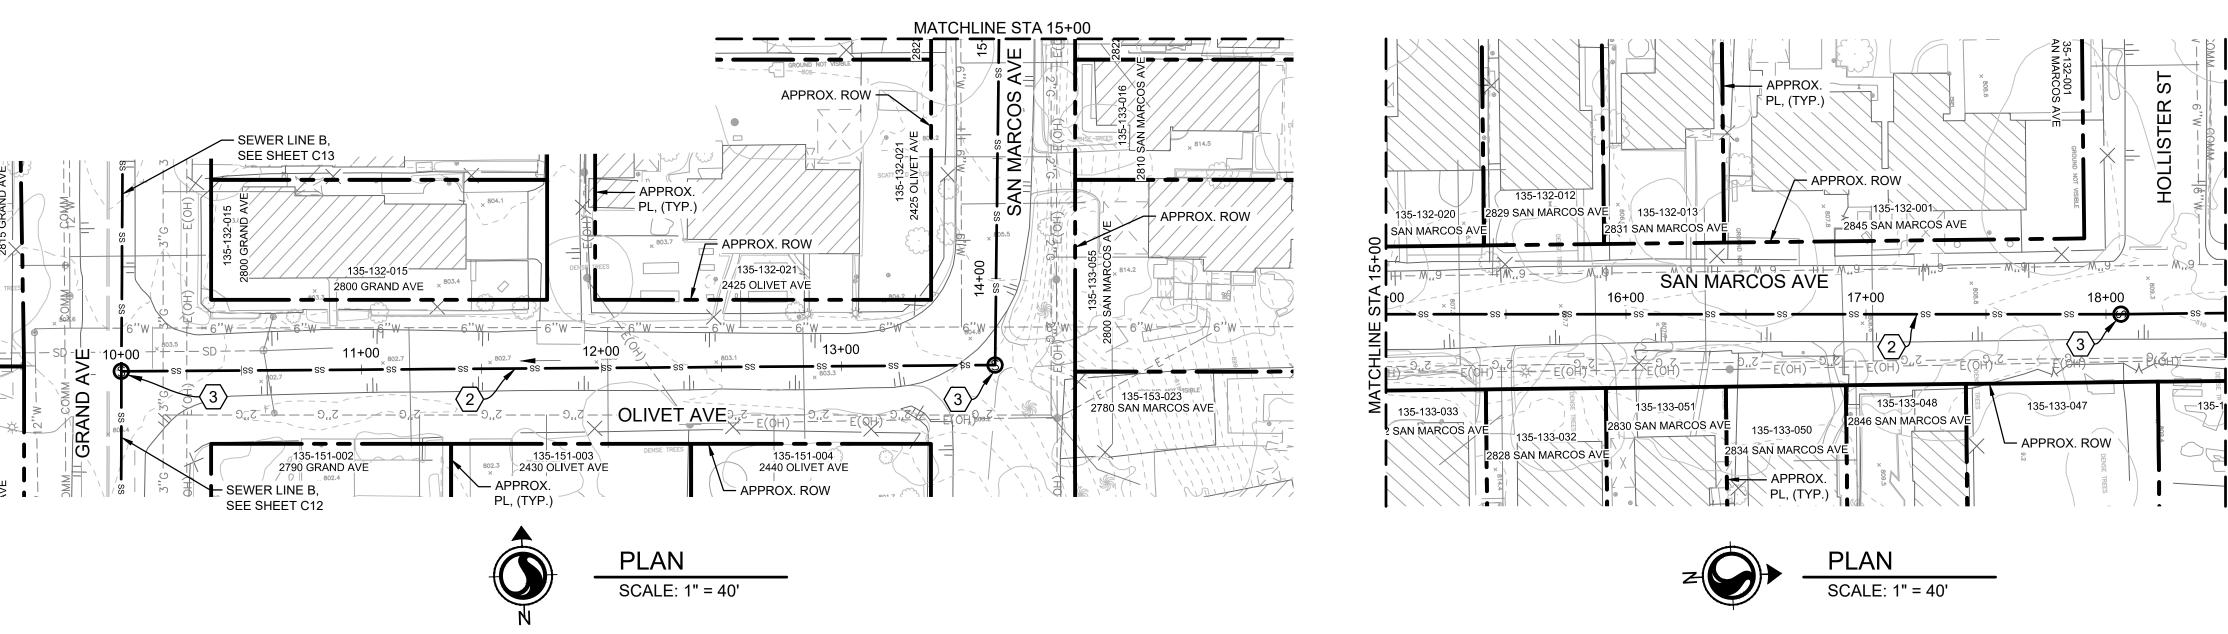

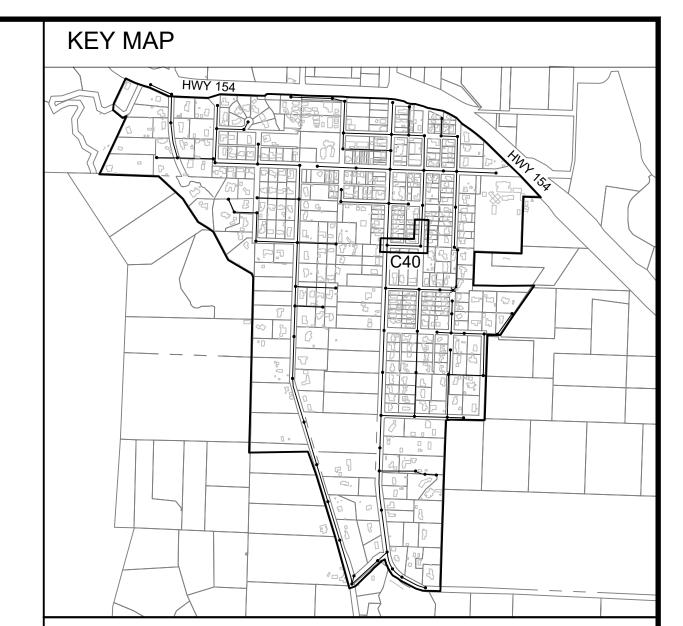

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- 2 CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

40 20 0 40

30% SUBMITTAL

DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE O TO PLAN AND PROFILE STA 10+00 TO STA 18+50 OLIVET AVE. - SAN MARCOS AVE.


PROJECT NO.


184031368

DWG NO. C40

SHT. 42 OF 54

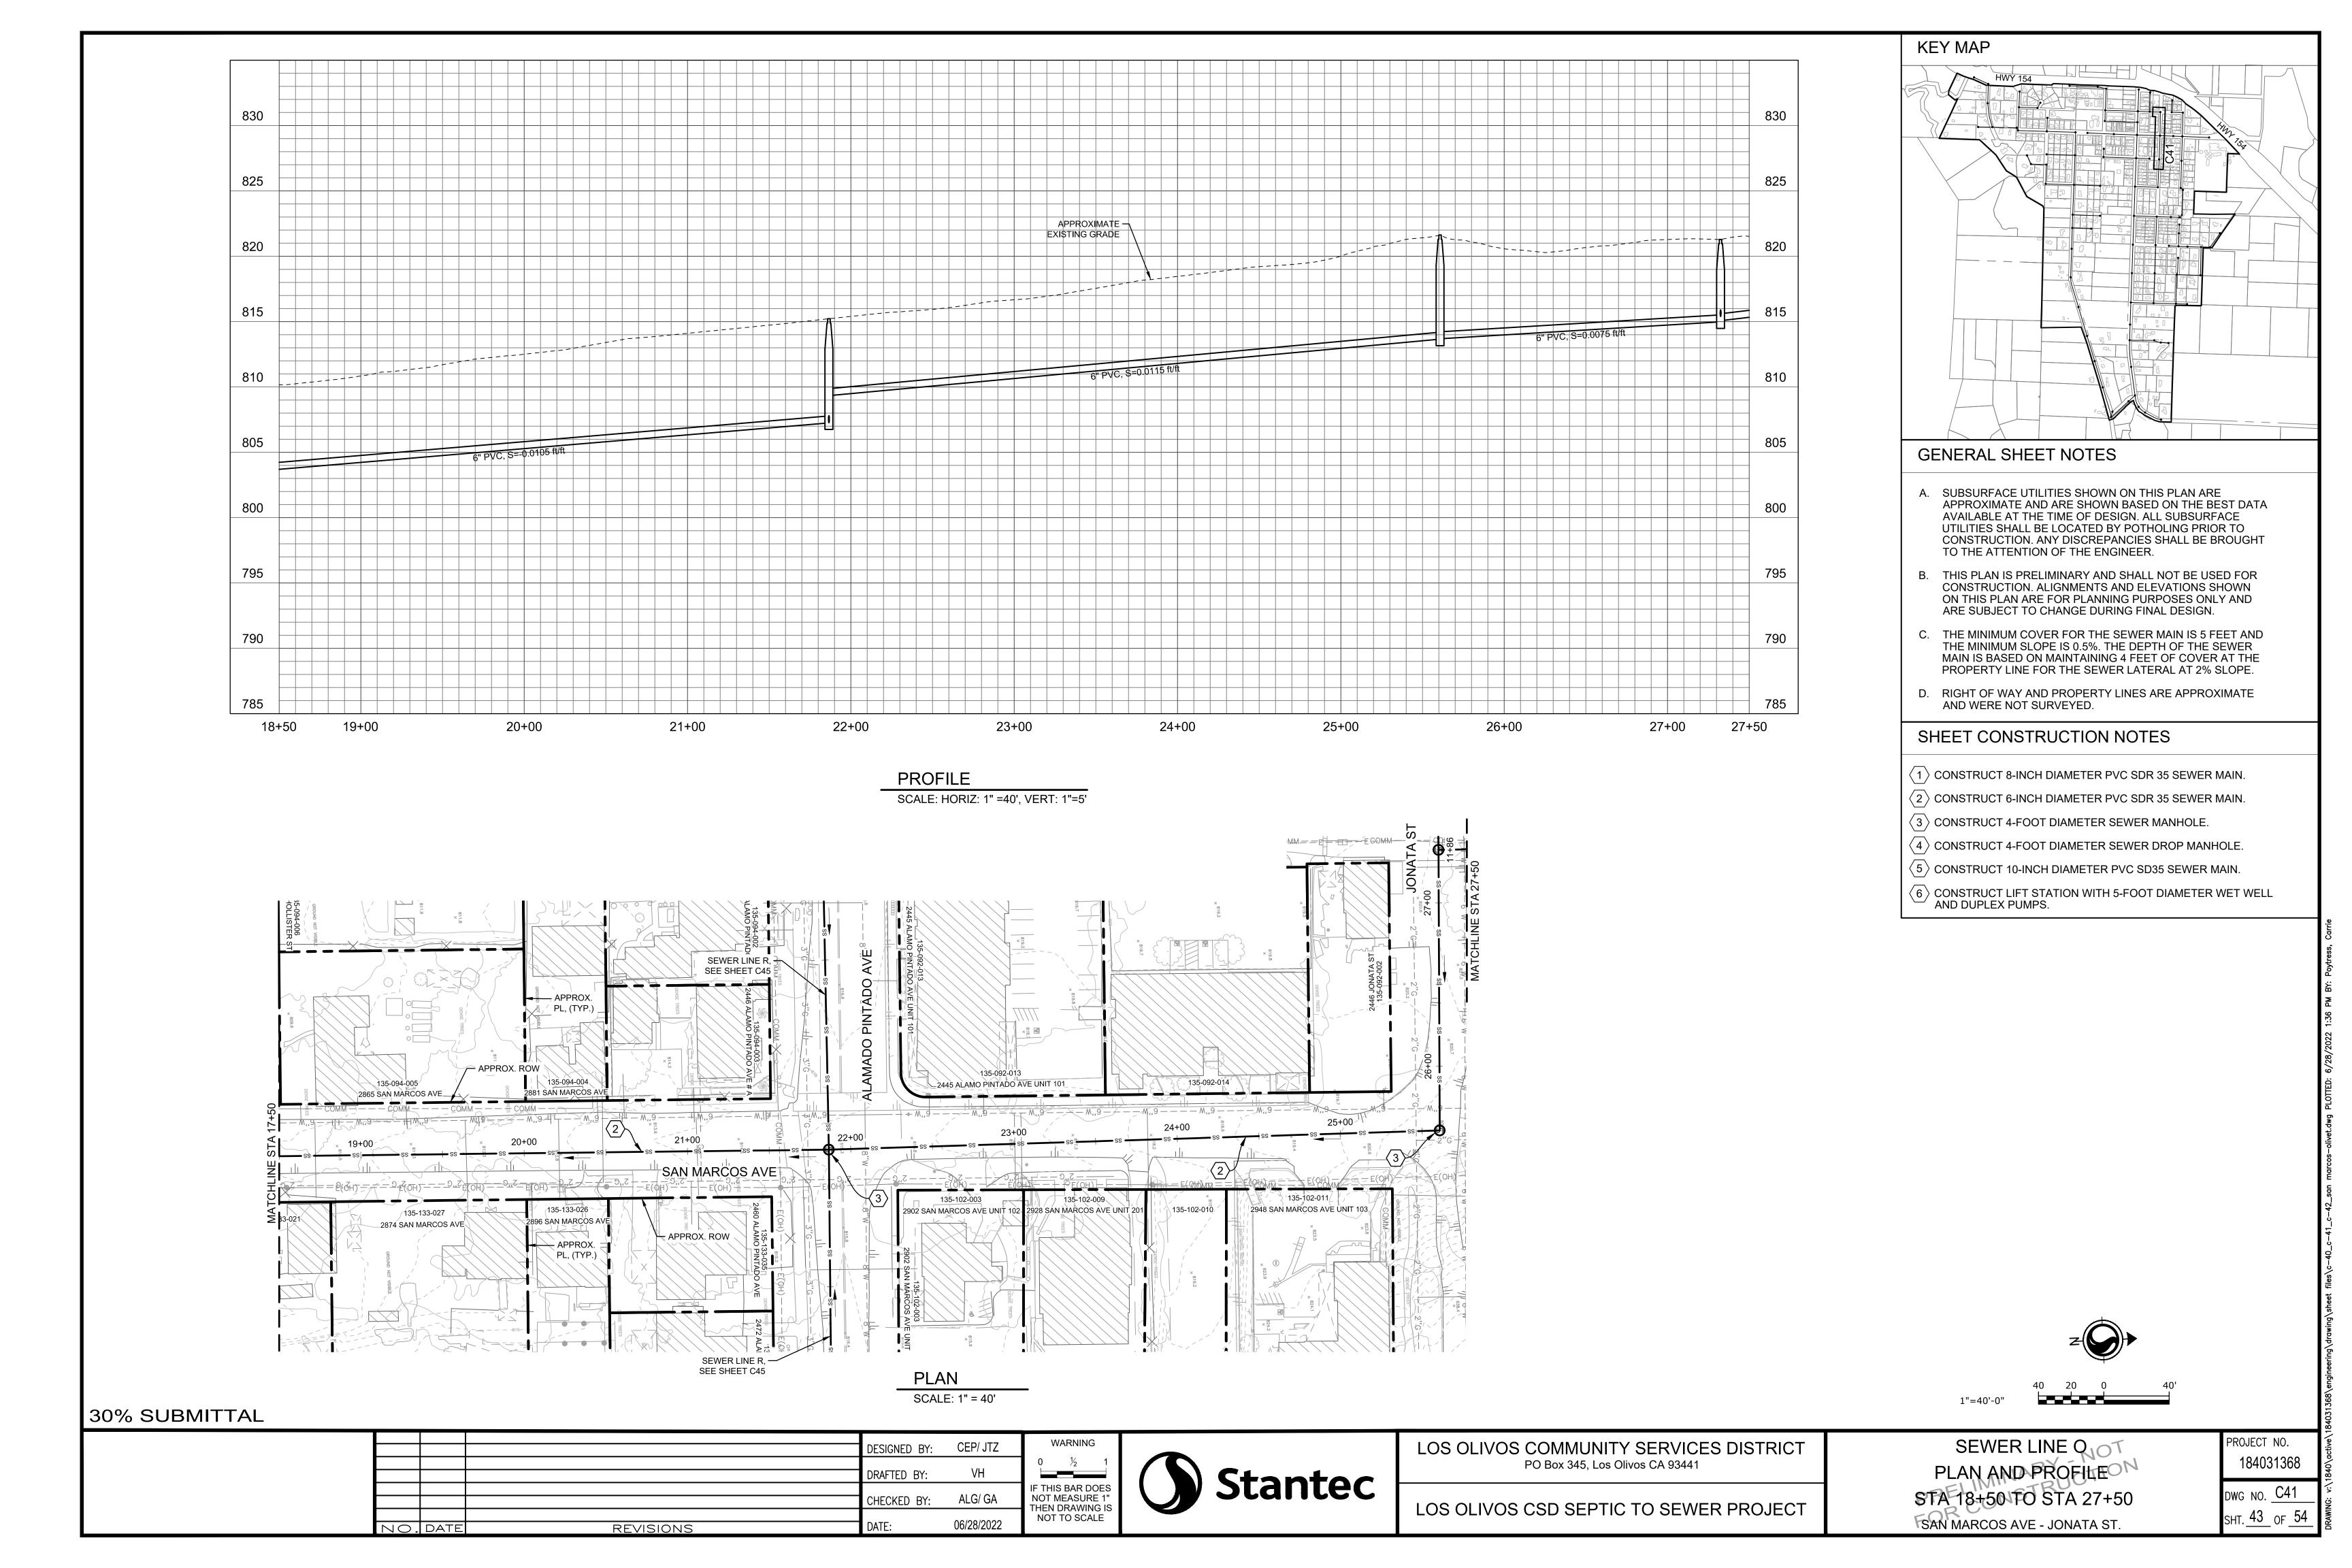

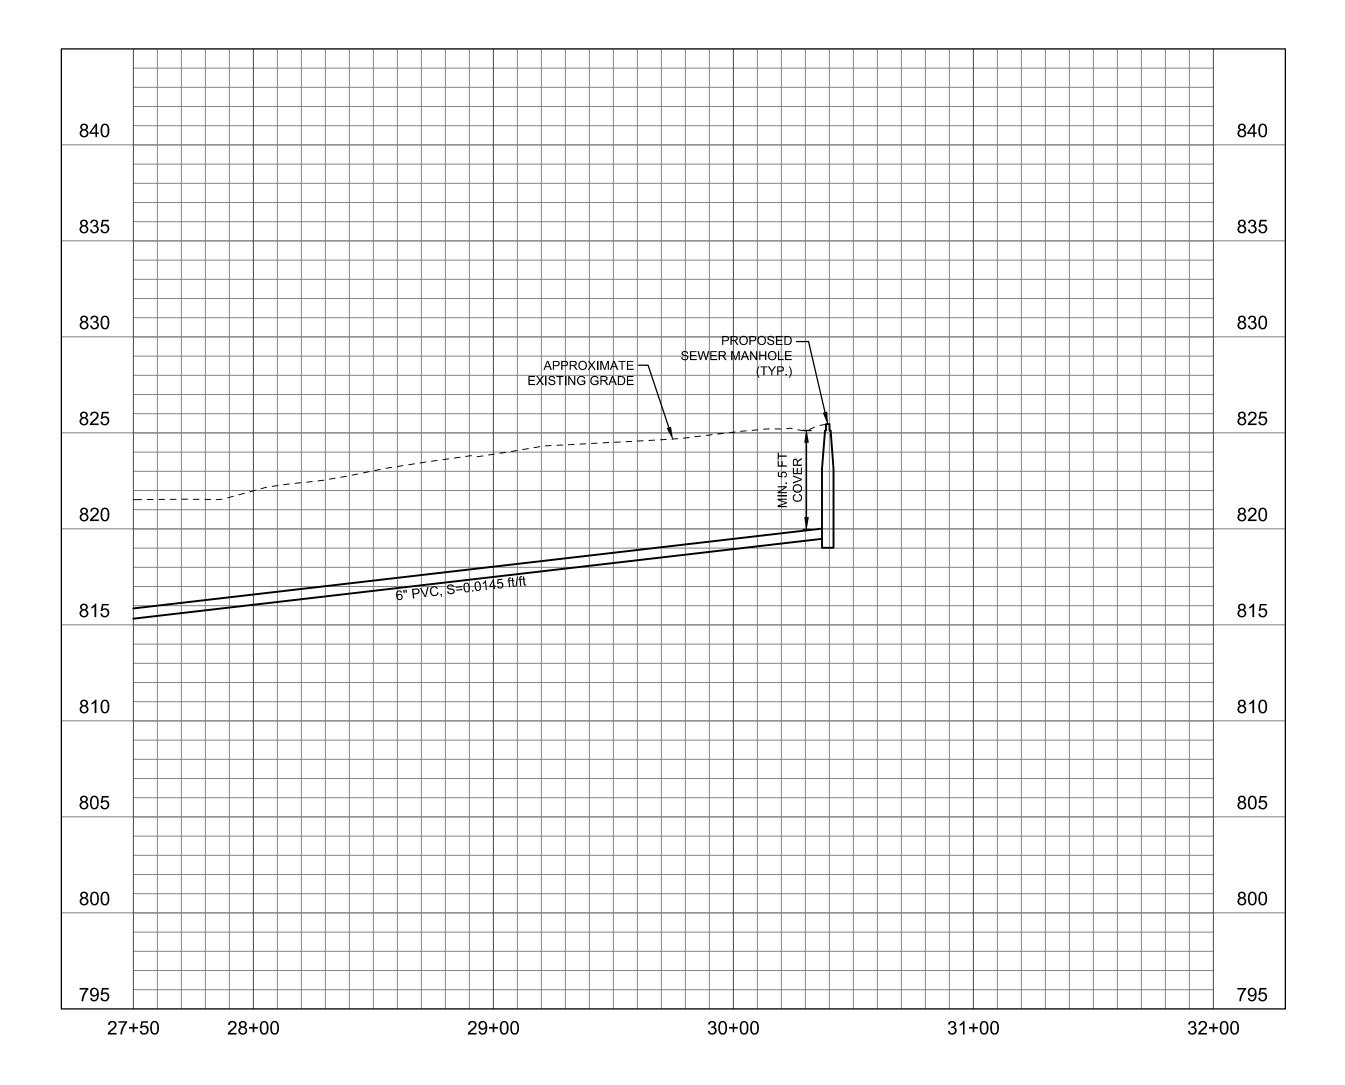

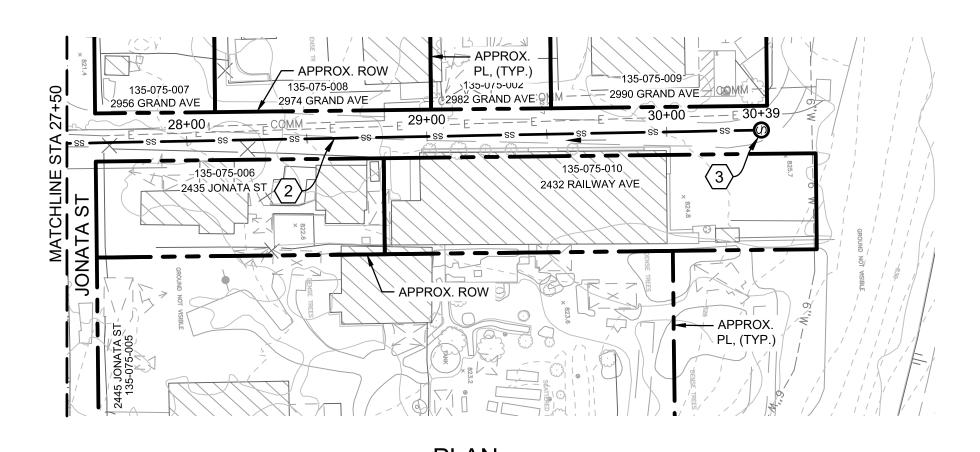

30% SUBMITTAL

DESIGNED BY: CEP/ JTZ DRAFTED BY: ALG/ GA CHECKED BY: 06/28/2022 REVISIONS NO. DATE



WARNING



LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE QUOT PLAN AND PROFILE STA 27+50 TO STA 30+39 JONATA STREET

PROJECT NO. 184031368 DWG NO. <u>C42</u>

**KEY MAP** 

### GENERAL SHEET NOTES


- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.


### SHEET CONSTRUCTION NOTES

- $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (2) CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- (4) CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- (5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



SHT. 44 OF 54

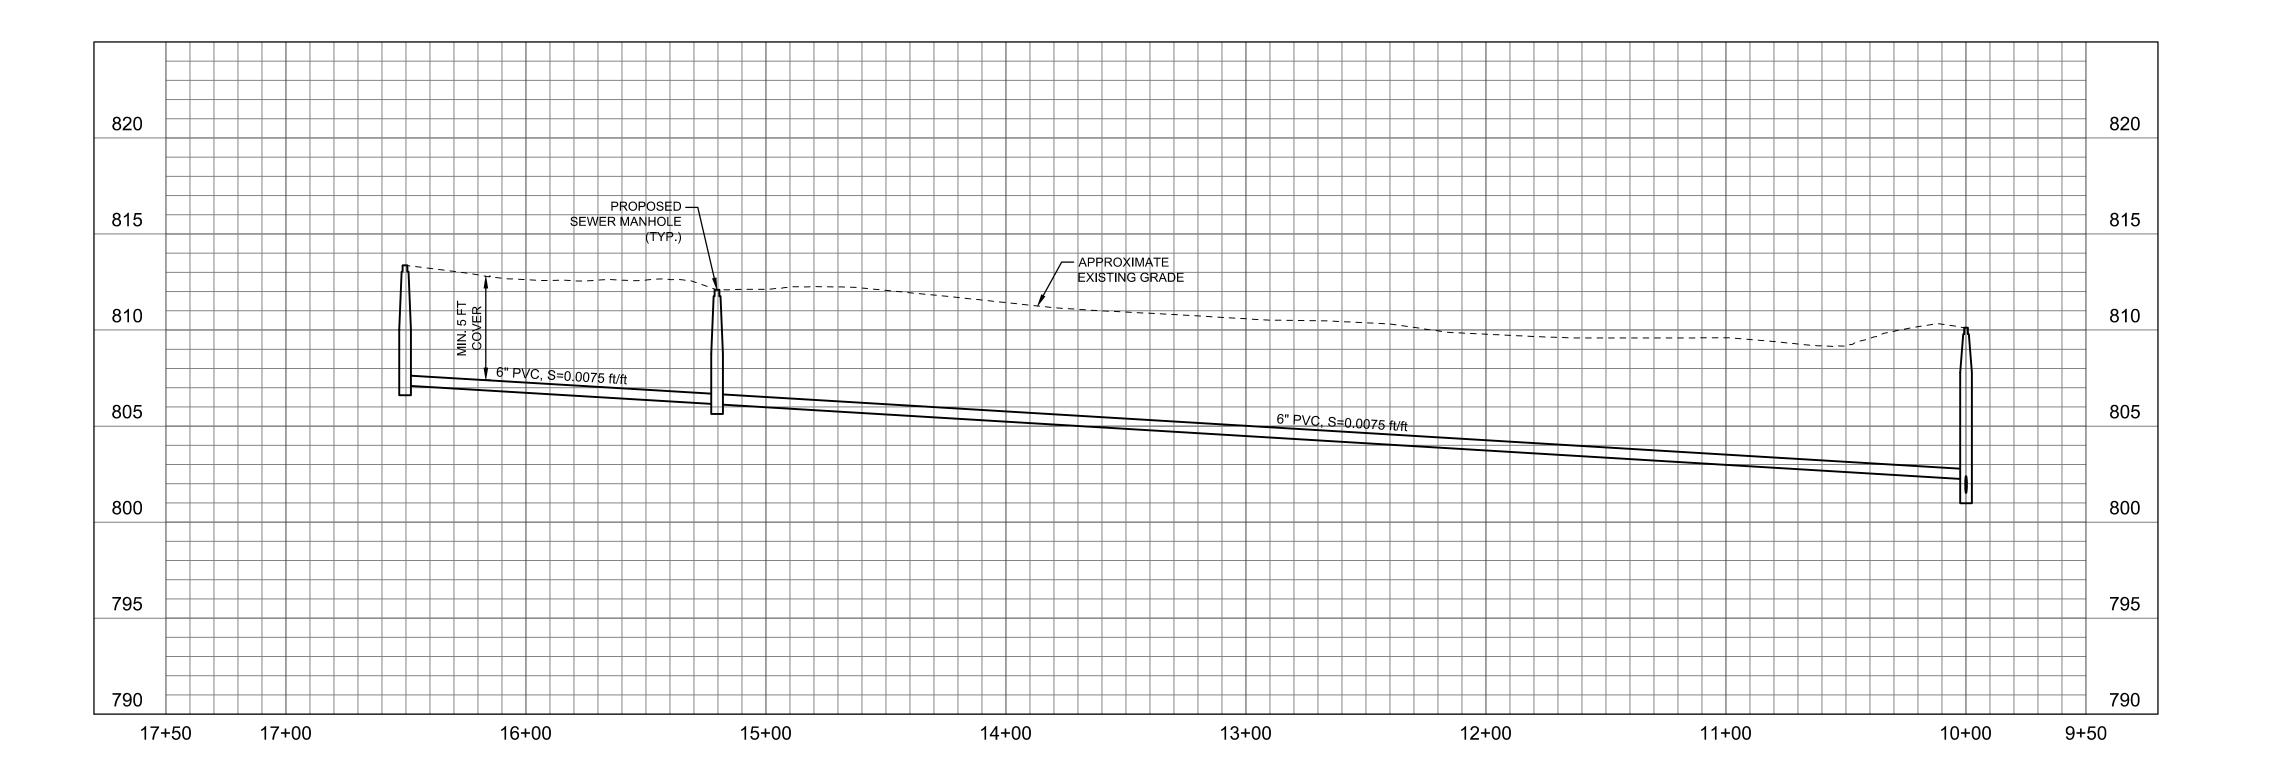

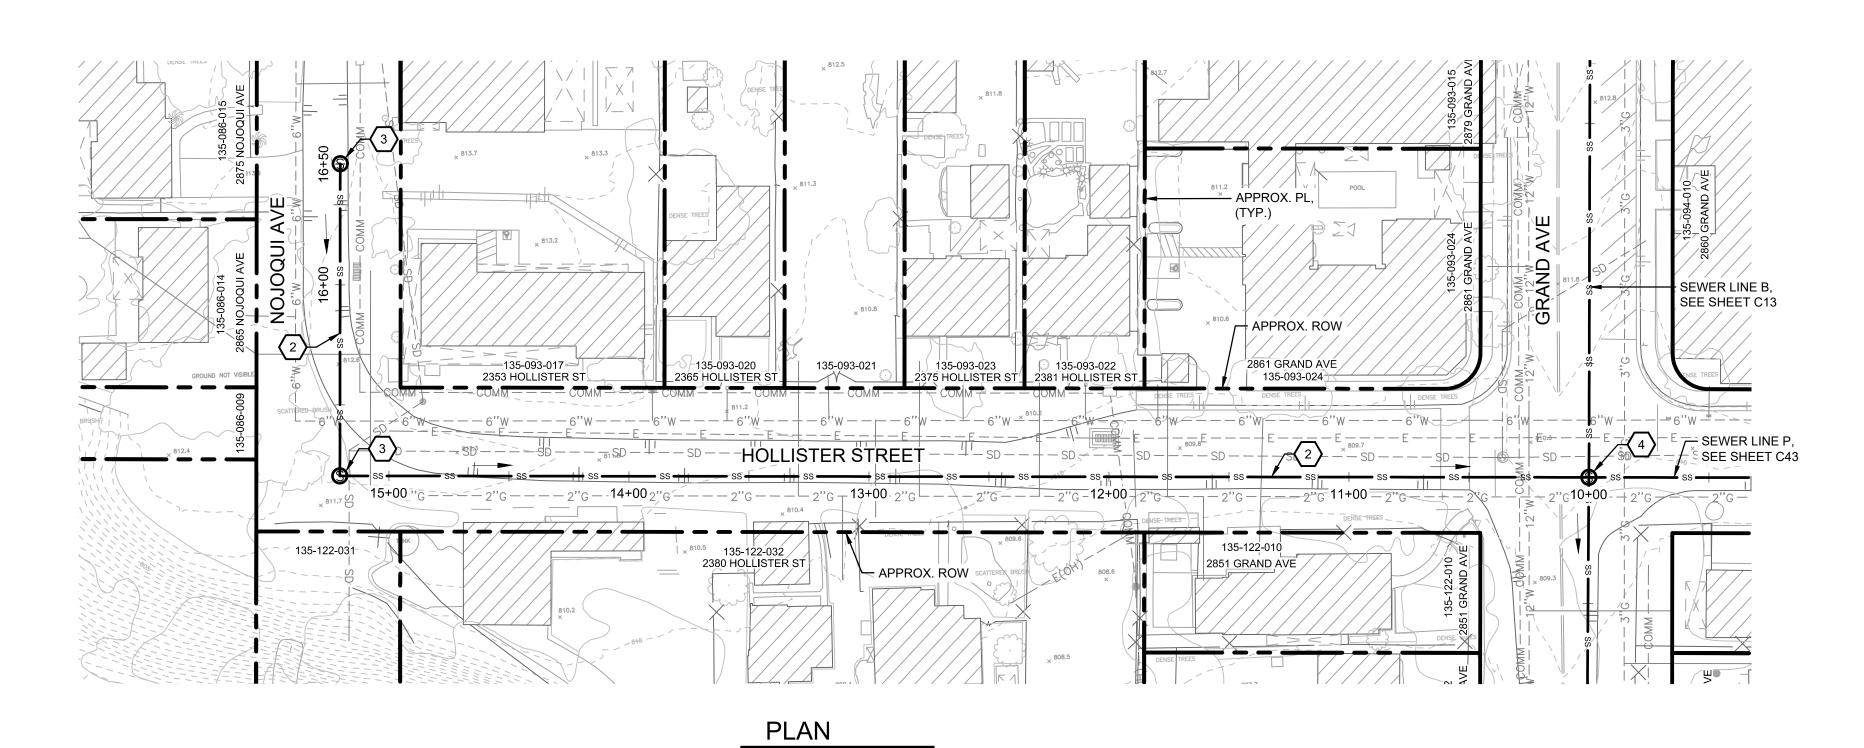


## 

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (2) CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- (5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
0 Z	DATE	REVISIONS	DATE:	06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE

SCALE: 1" = 40'




LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE Q
PLAN AND PROFILE
STA 10+00 TO STA 16+50
HOLLISTER STREET - NOJOQUI AVENUE


PROJECT NO. 184031368

DWG NO. <u>C44</u> SHT. <u>46</u> OF <u>54</u>

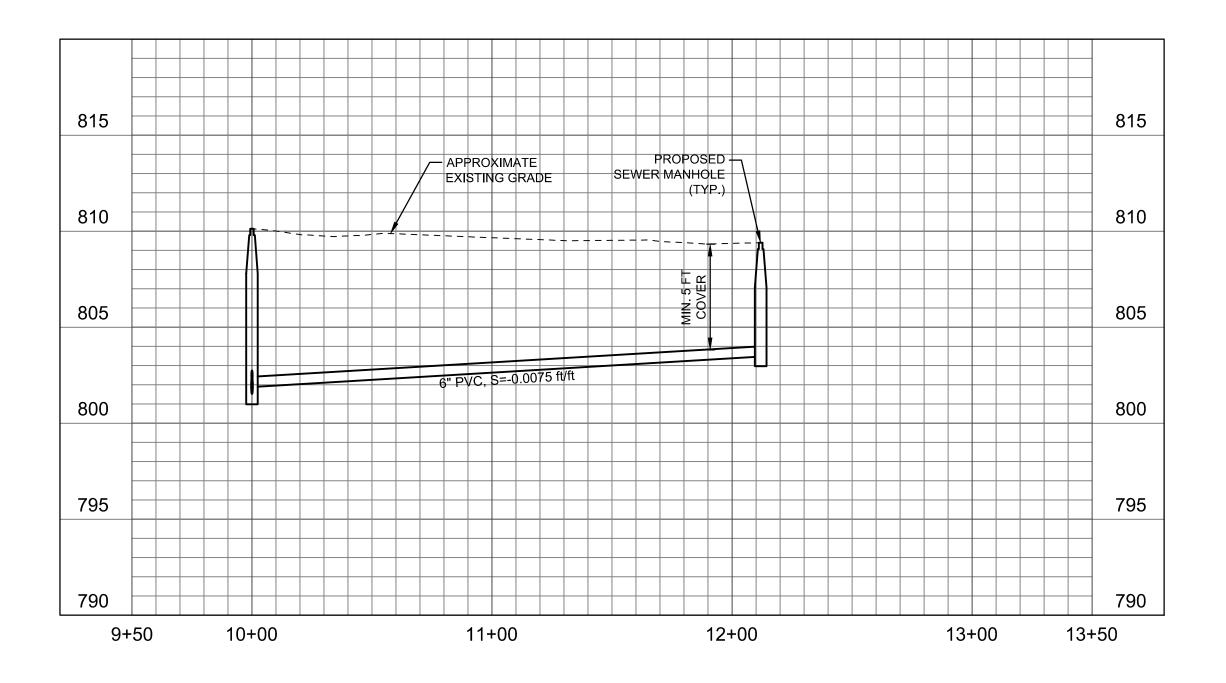


PROFILE

SCALE: HORIZ: 1" =40', VERT: 1"= 5'

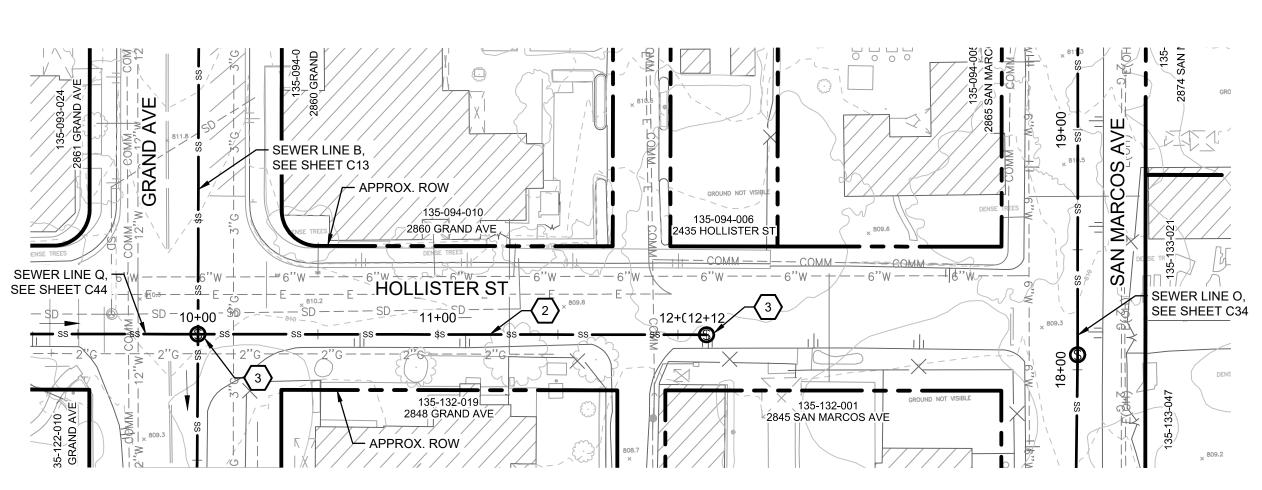

PLAN SCALE: 1" = 40'



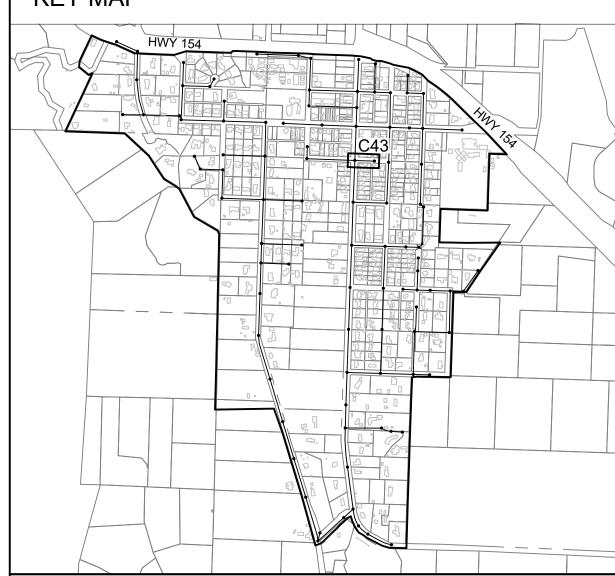

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- (4) CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- (5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

40 20 0 1"=40'-0"

### 30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ	
			DRAFTED BY:	VH	0 ⊢
			DRAFIED DI:	VII	IF 1
			CHECKED BY:	ALG/ GA	NC THI
NO.	DATE	REVISIONS	DATE:	06/28/2022	N(

WARNING THIS BAR DOES NOT MEASURE 1" HEN DRAWING IS NOT TO SCALE




LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441


LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE PLOT STA 10+00 FO STA 12+12 HOLLISTER STREET

PROJECT NO. 184031368 DWG NO. <u>C43</u>

SHT. 45 OF 54

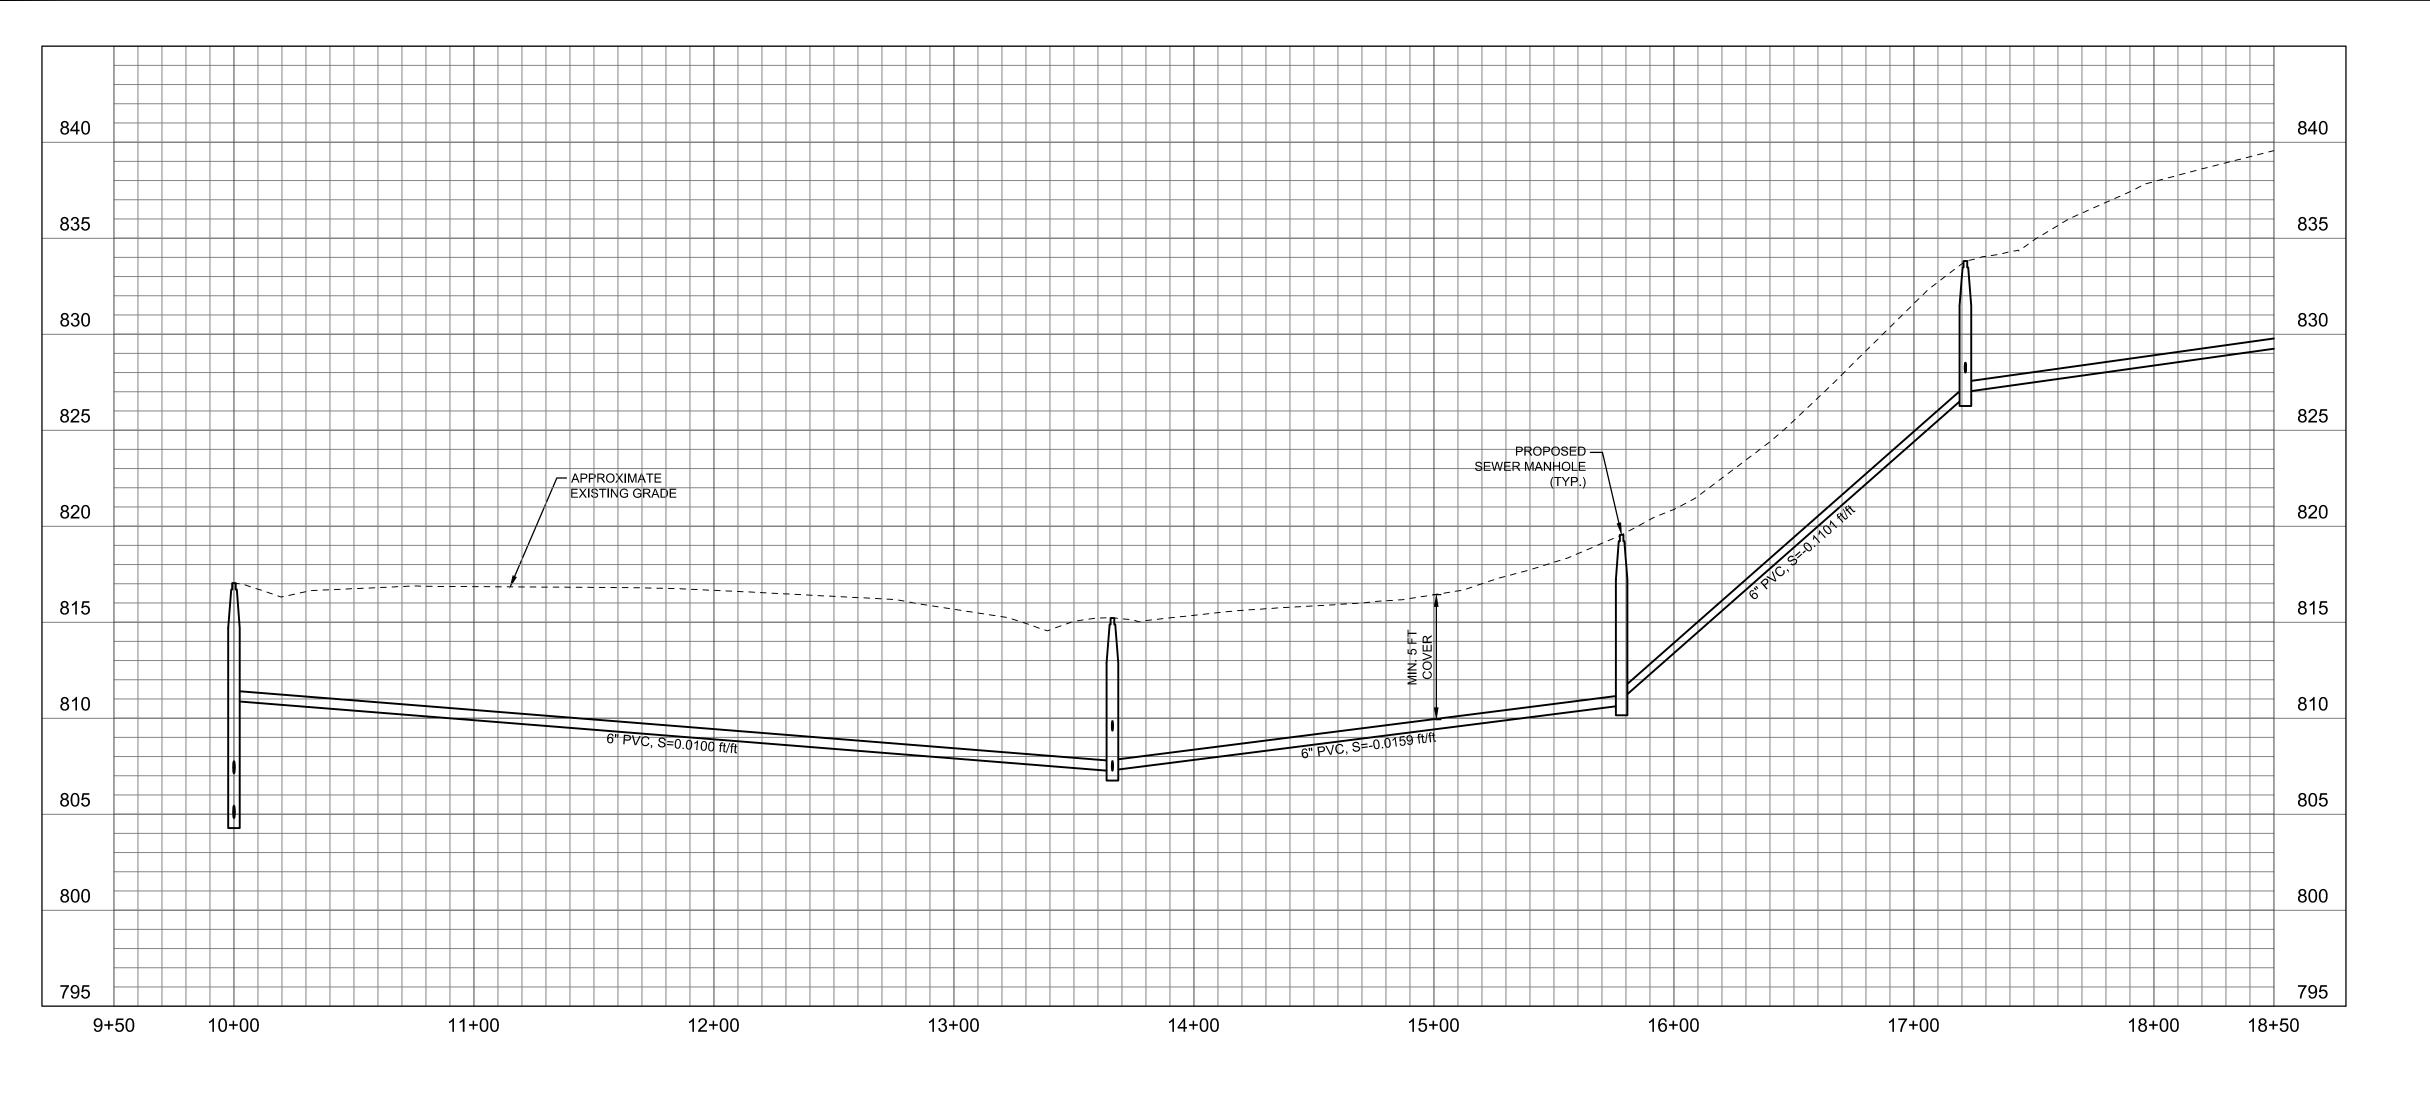

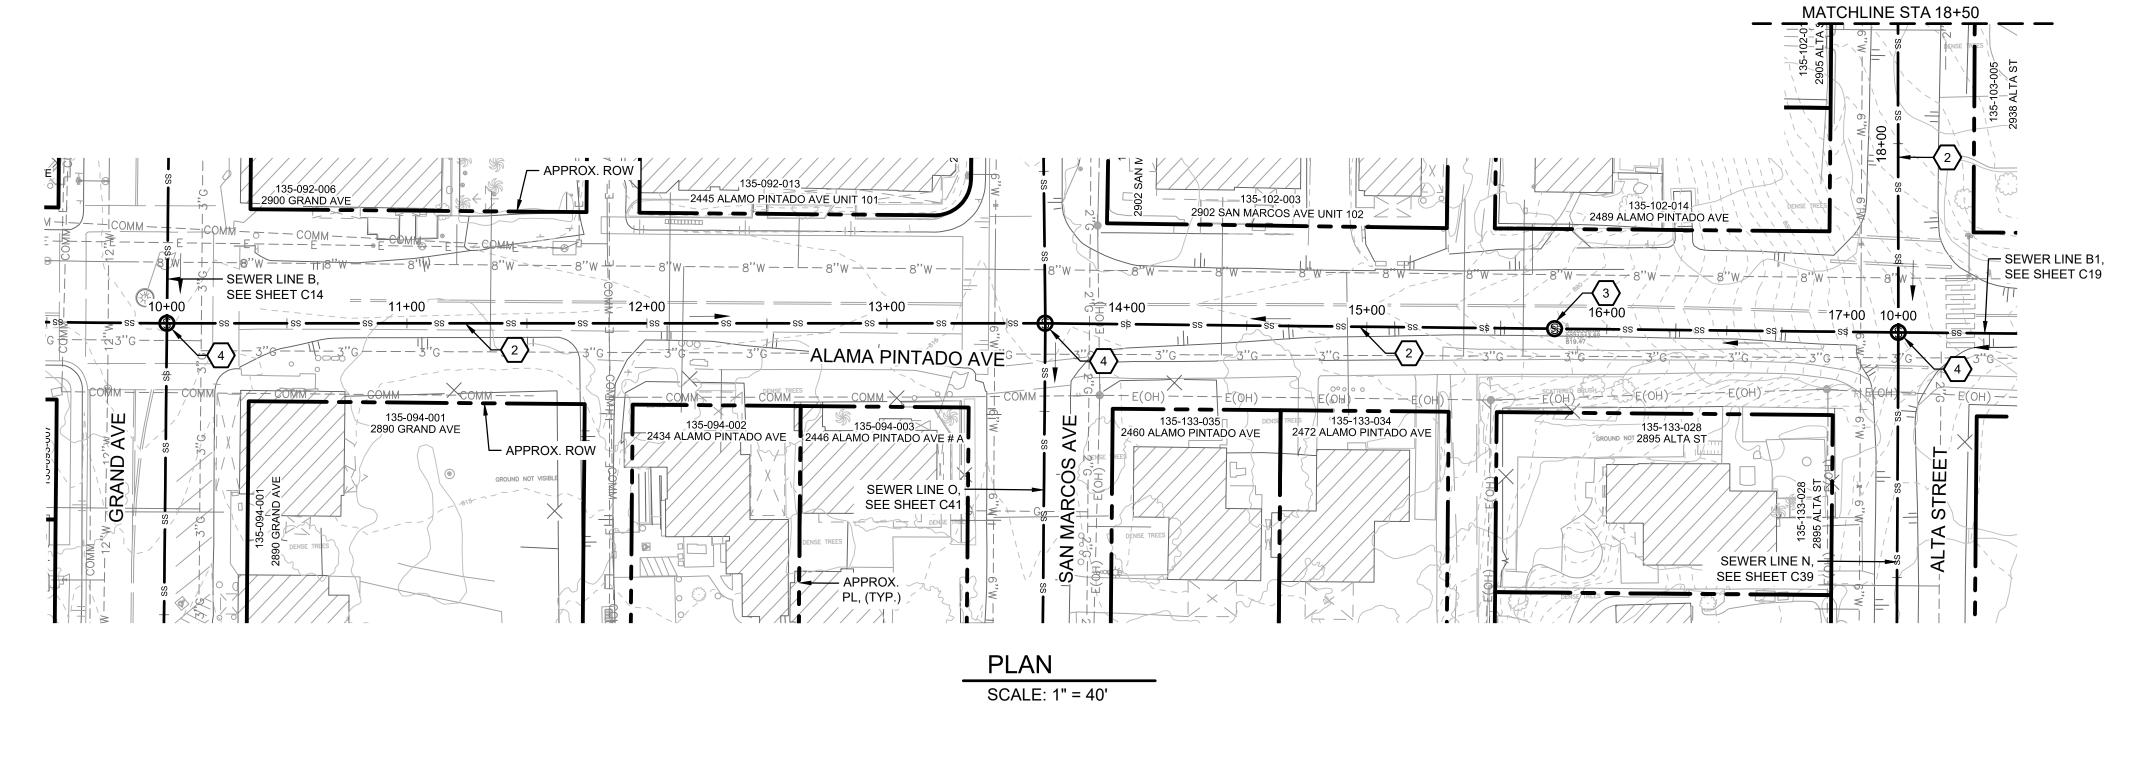

LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE ROT PLAN AND PROFILEON STA 10+00 FO STA 18+50 FOR ALAMO PINTADO AVENUE

**KEY MAP** 

**GENERAL SHEET NOTES** 

AND WERE NOT SURVEYED.

SHEET CONSTRUCTION NOTES

A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE

TO THE ATTENTION OF THE ENGINEER.

APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT

B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND

C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.

D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE

 $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.

(2) CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.

4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.

 $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.

6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

(3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.

ARE SUBJECT TO CHANGE DURING FINAL DESIGN.

PROJECT NO. 184031368 DWG NO. <u>C45</u> SHT. 47 OF 54


1"=40'-0"


30% SUBMITTAL

DESIGNED BY: CEP/ JTZ DRAFTED BY: CHECKED BY: 06/28/2022 REVISIONS NO. DATE

WARNING IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS NOT TO SCALE

Stantec

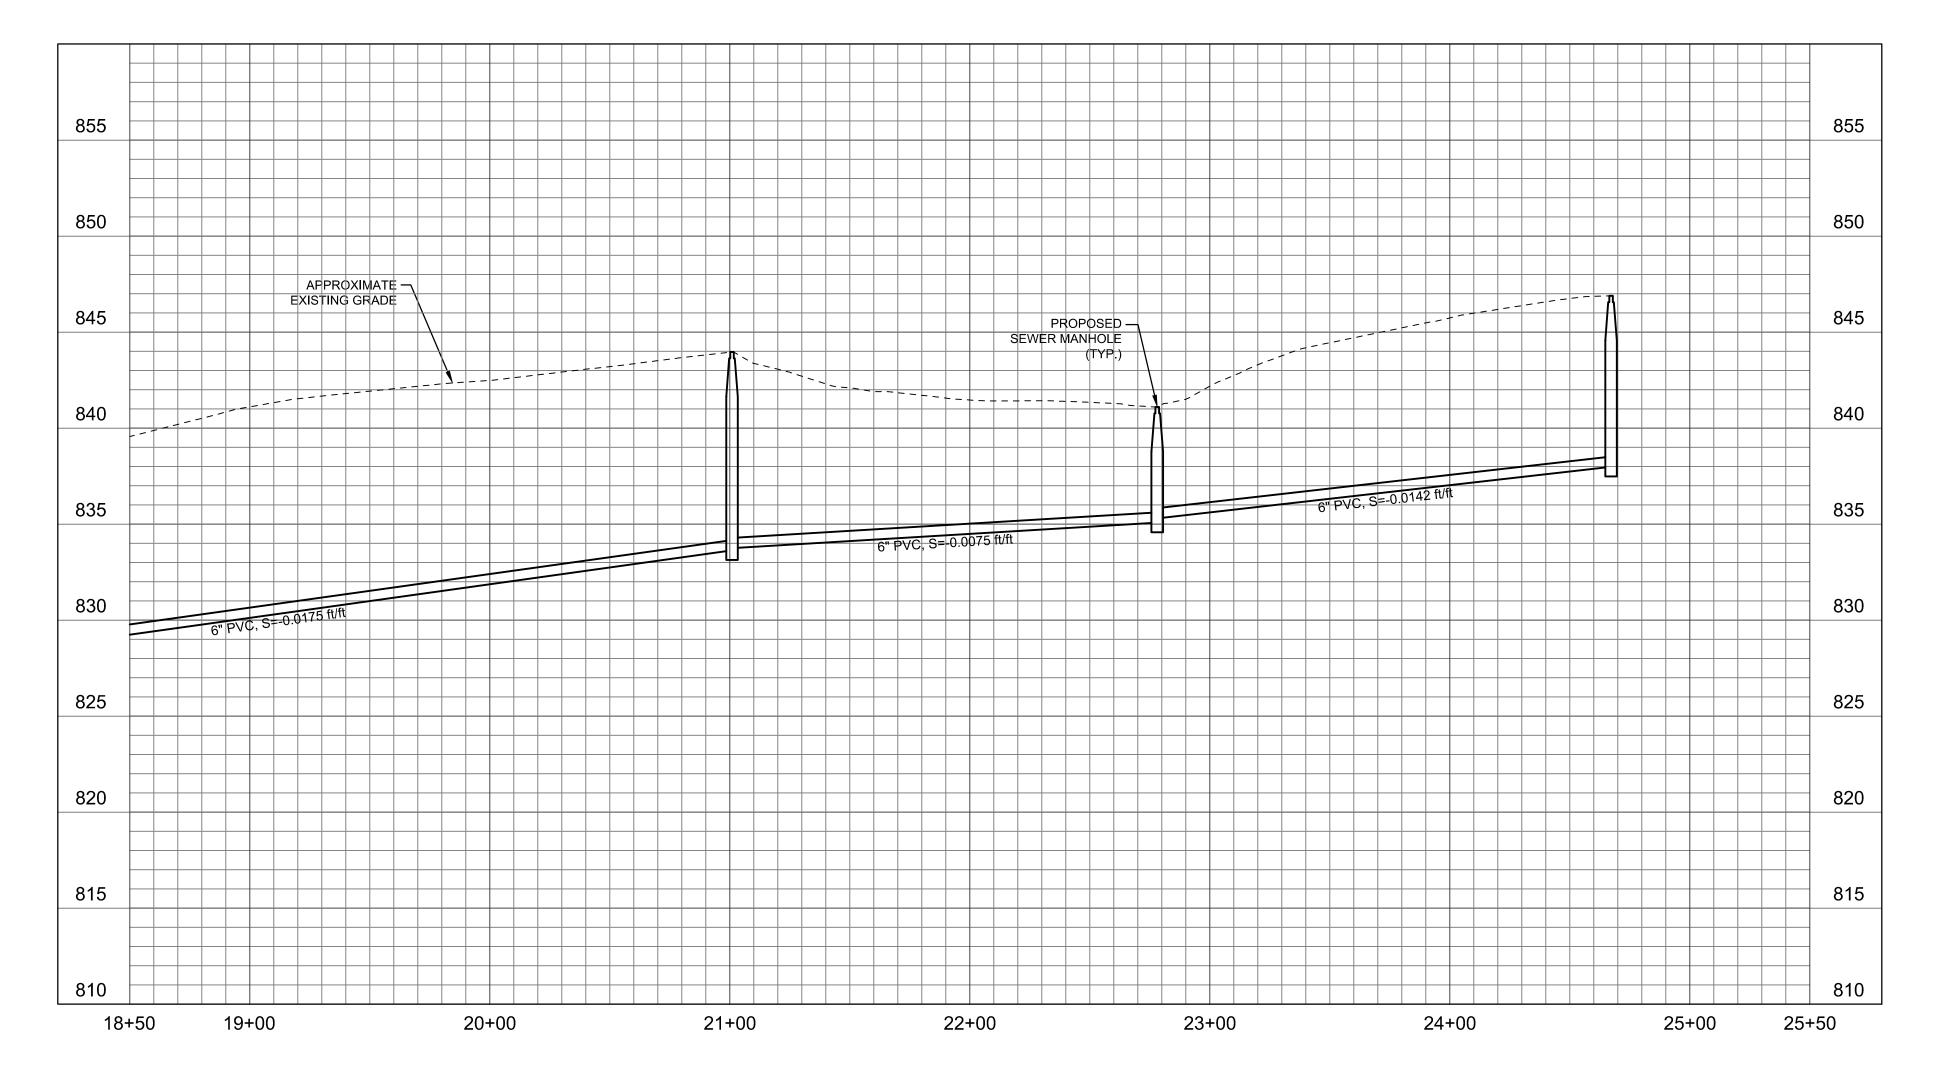

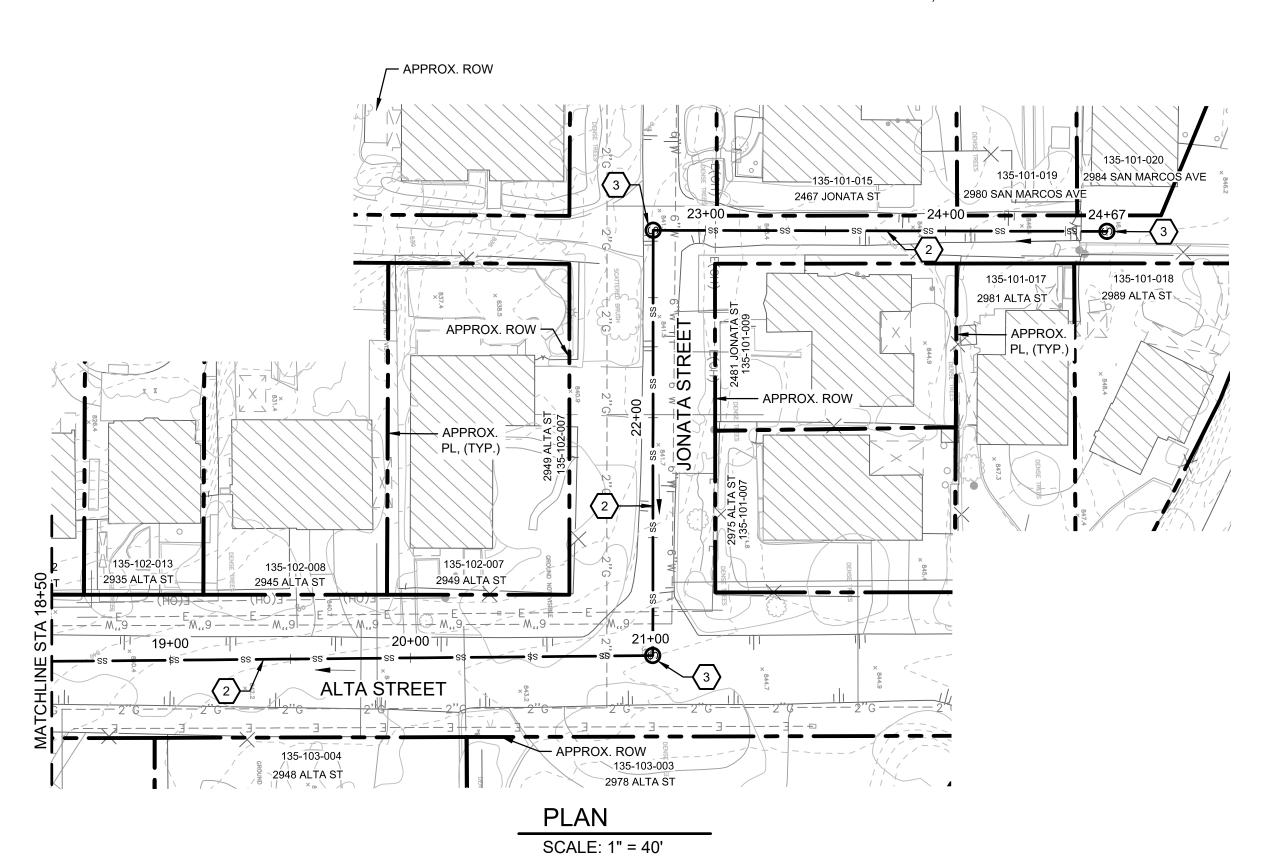

30% SUBMITTAL


DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022

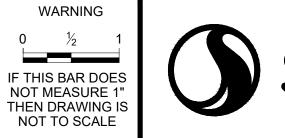

Stantec

LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

## SEWER LINE R PLAN AND PROFILE STA 18+50TO STA 24+67 ALTA STREET - JONATA STREET

PROJECT NO.

184031368

DWG NO. C46

DWG NO. C46
SHT. 48 OF 54

3 CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
5 CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

**KEY MAP** 

GENERAL SHEET NOTES

AND WERE NOT SURVEYED.

SHEET CONSTRUCTION NOTES

A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE

TO THE ATTENTION OF THE ENGINEER.

APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA

AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT

B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR

ARE SUBJECT TO CHANGE DURING FINAL DESIGN.

CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND


C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND

D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE


 $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.


 $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.

THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.



1"=40'-0"

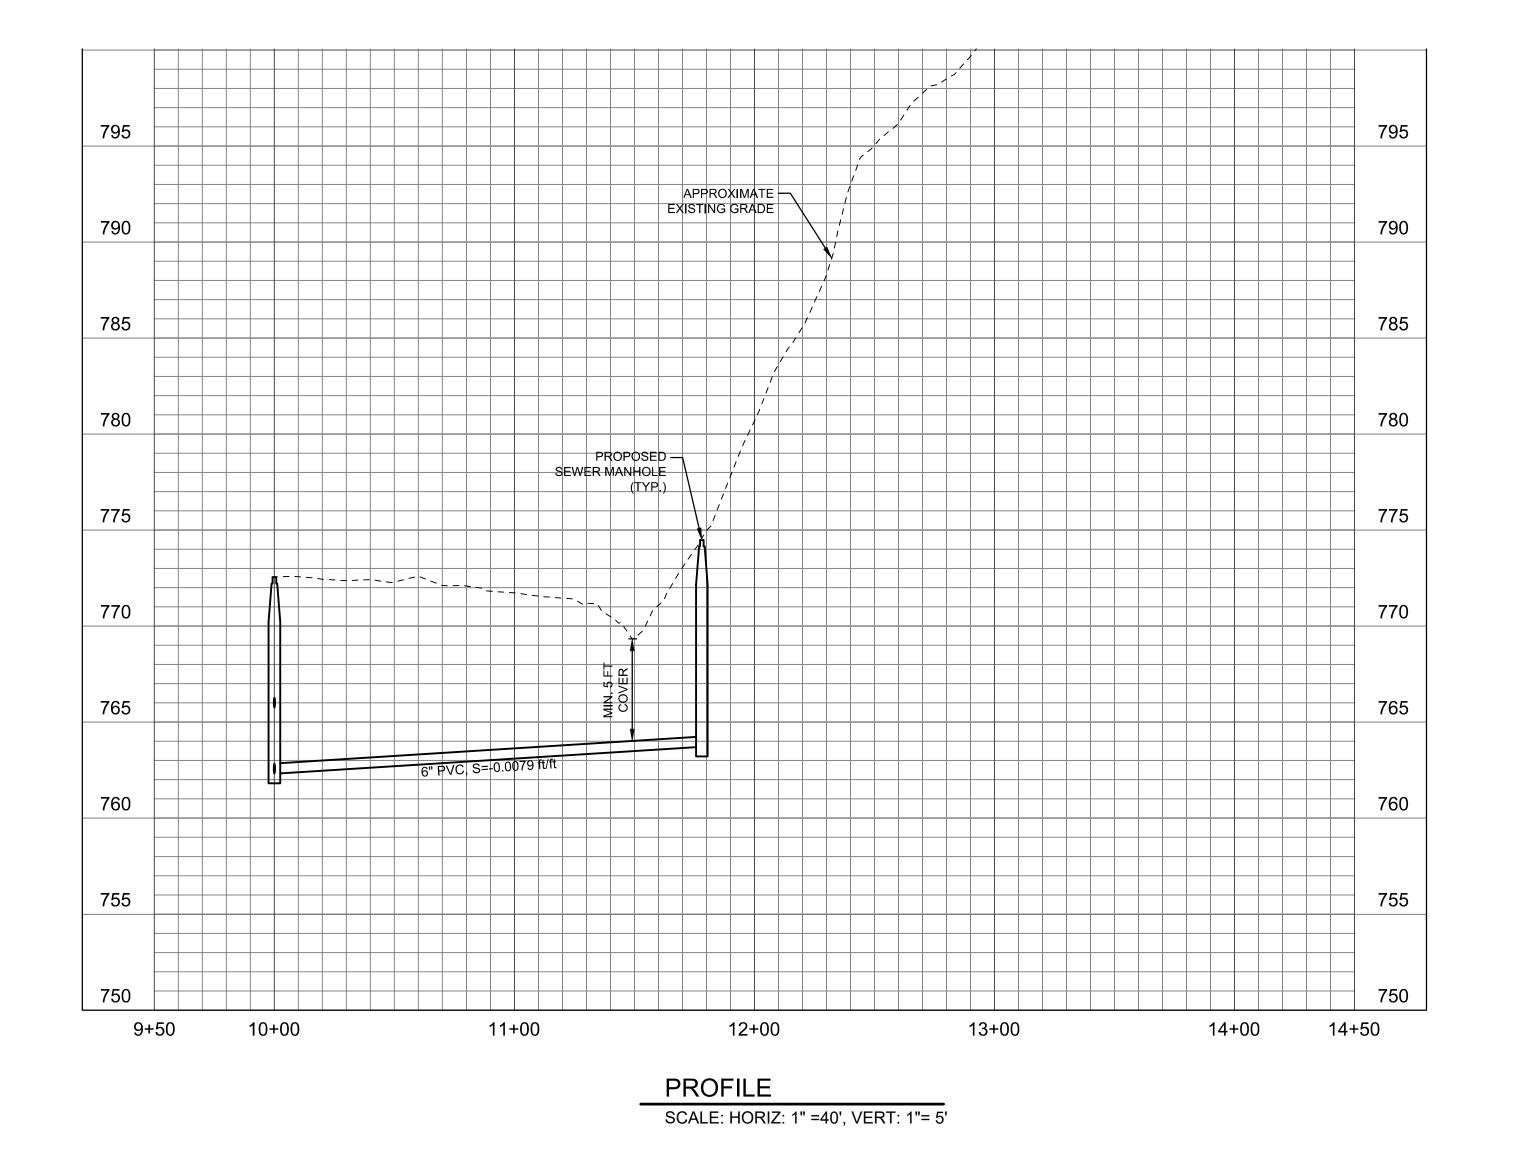

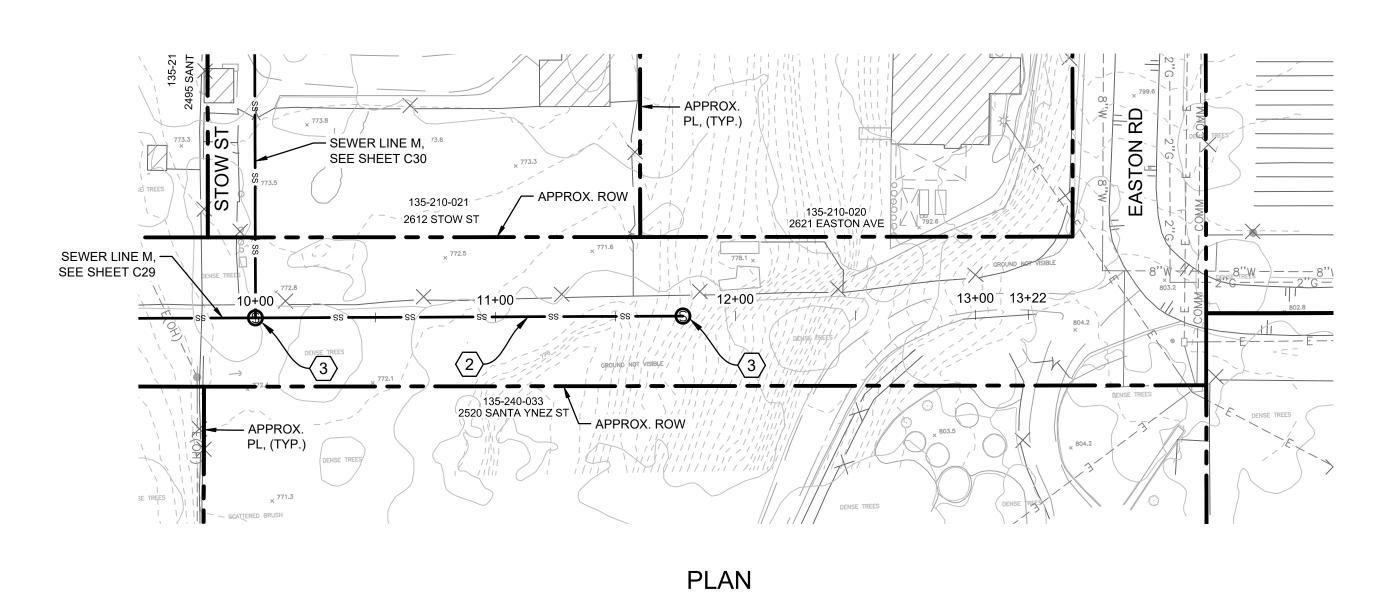

### Stantec

LOS OLIVOS COMMUNITY SERVICES DISTRICT

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE X OT PLAN AND PROFILE STA 10+00 TO STA 11+78 BETWEEN STOW ST. AND EASTON RD.

**KEY MAP** 

GENERAL SHEET NOTES

AND WERE NOT SURVEYED.

SHEET CONSTRUCTION NOTES

A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE

TO THE ATTENTION OF THE ENGINEER.

APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA

AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT

B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND

C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND

D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE

 $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.

 $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.

(4) CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.

 $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.

6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

(3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.

THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.

ARE SUBJECT TO CHANGE DURING FINAL DESIGN.

PROJECT NO. 184031368

DWG NO. <u>C47</u> SHT. 49 OF 54

30% SUBMITTAL


DESIGNED BY: CEP/ JTZ DRAFTED BY: ALG/ GA CHECKED BY: 06/28/2022 REVISIONS NO. DATE

SCALE: 1" = 40'


WARNING

IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS NOT TO SCALE

### PO Box 345, Los Olivos CA 93441

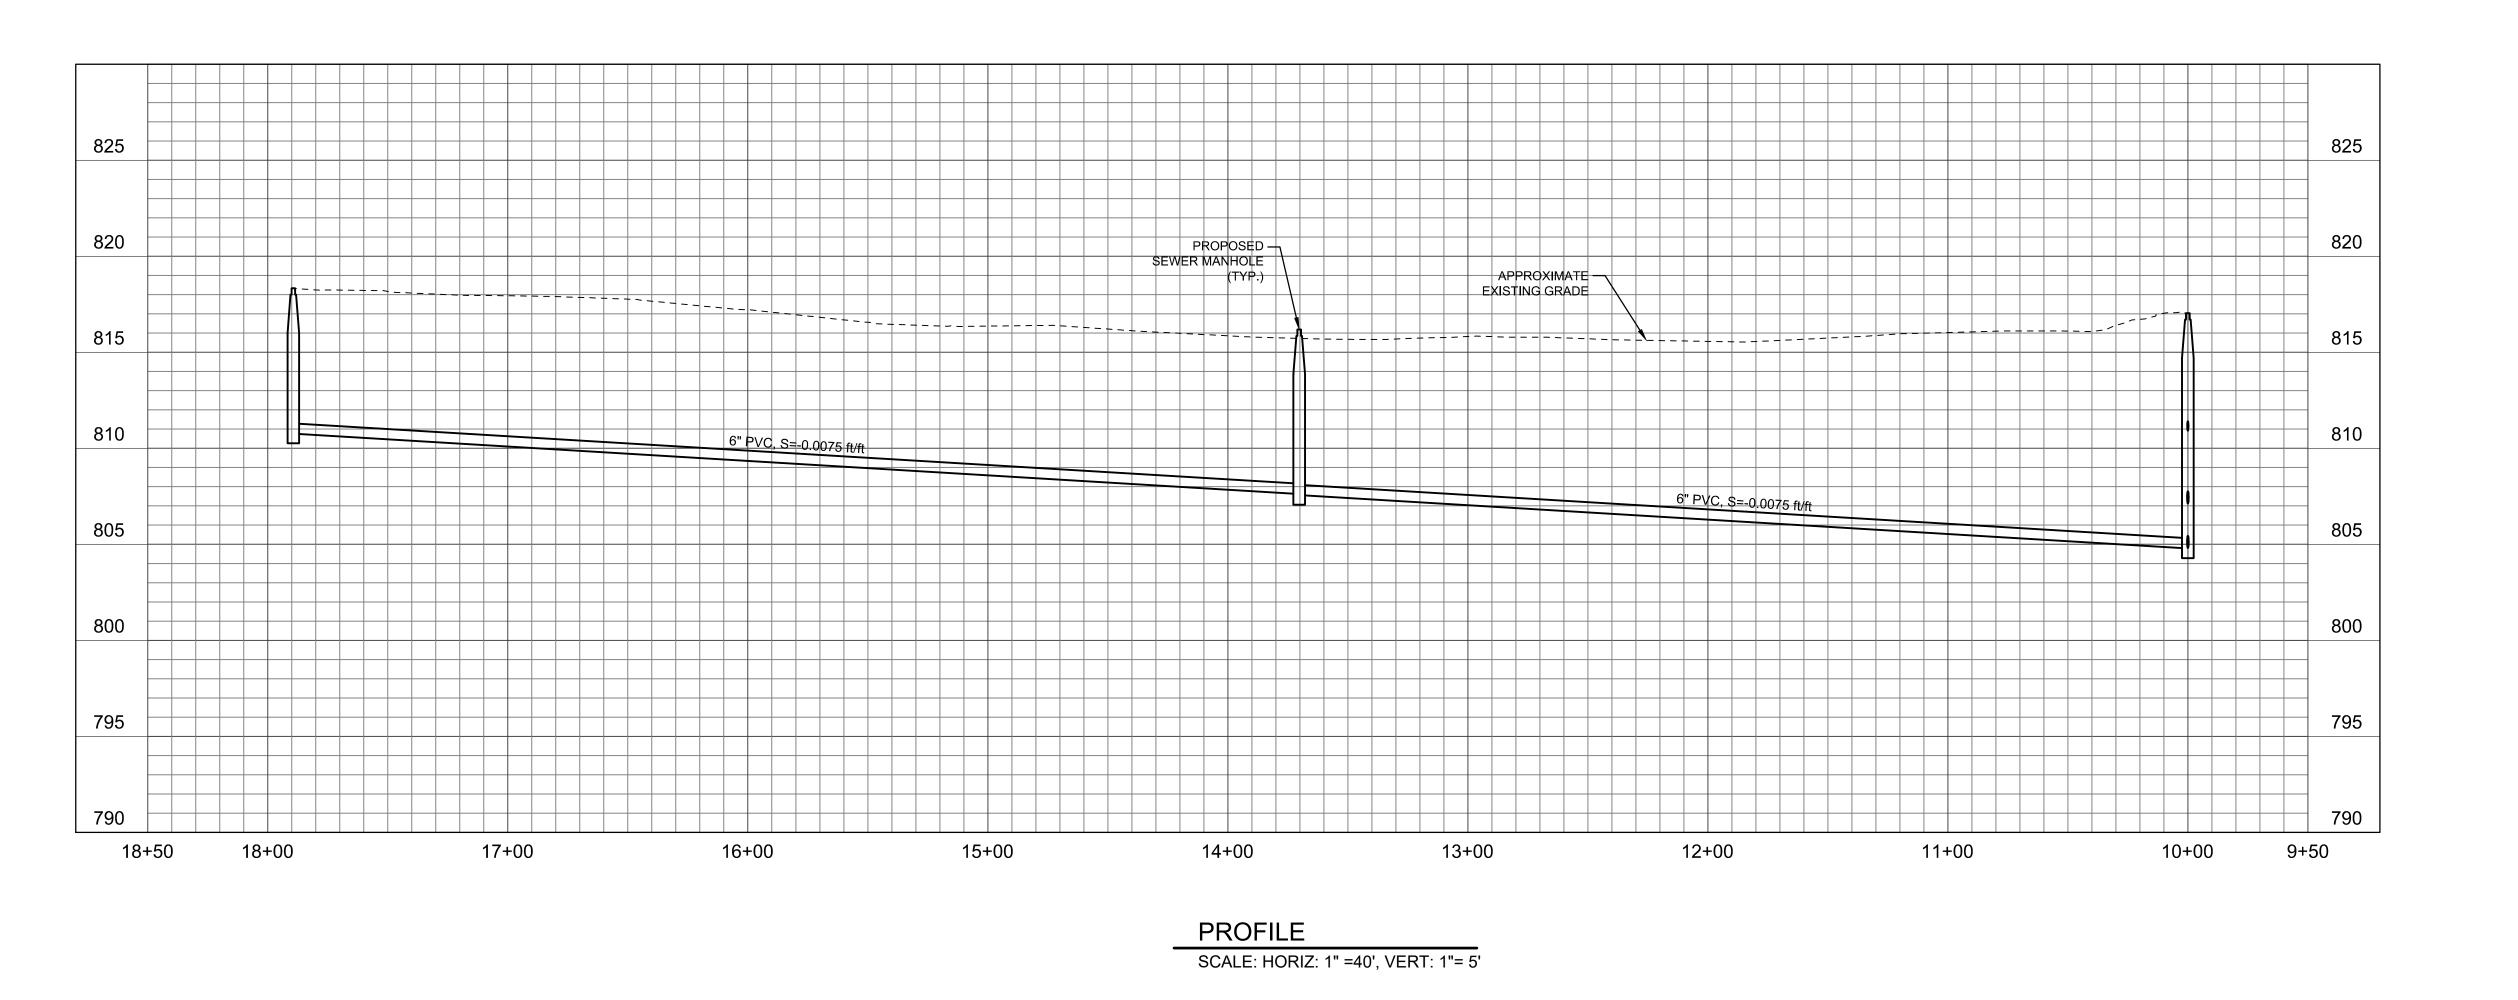

APPROX. APPROX. ROW SEE SHEET C13 2901 GRAND AVI 135-091-008 -2901 NOJOQUI AVE 2900 NOJOQUI AVE 135-082-024 135-091-018 \_2900 GRAND / SEE SHEET C45 ├*\frac{1}{4} - \frac{1}{3}*"G - - - - 3"G - - 12+003<u>"</u>G -135-086-016 2330 ALAMO PINTADO AVE 135-093-019 2356 ALAMO PINTADO AVE 135-086-017 135-086-010 × 135-093-003 135-093-004 005 135-093-006 2374 ALAMO PINTADO AVE SEWER LINE B, SEE SHEET C13 346 ALAMO PINTADO AVE 135-086-013 2352 ALAMO PINTADO AVE 2366 ALAMO PINTADO AVE 358 ALAMO PINTADO AVE APPROX. ROW ---- GROUND NOT VISIBLE ----SCALE: 1" = 40'

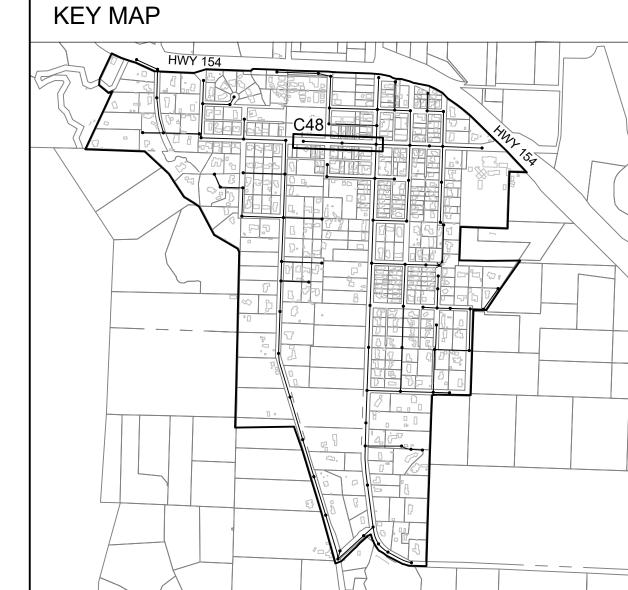


### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- $\langle 5 \rangle$  CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- $\fbox{6}$  CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

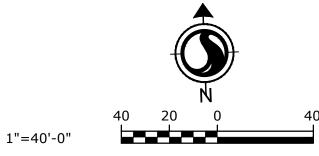

30% SUBMITTAL

DESIGNED BY: CEP/ JTZ

DRAFTED BY: VH

CHECKED BY: ALG/ GA

NO. DATE REVISIONS

DATE: 06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE S

PLAN AND PROFILE

STA 10+00 TO STA 17+89


ALAMO PINTADO AVENUE

PROJECT NO.


184031368

DWG NO. C48

SHT. 50 OF 54

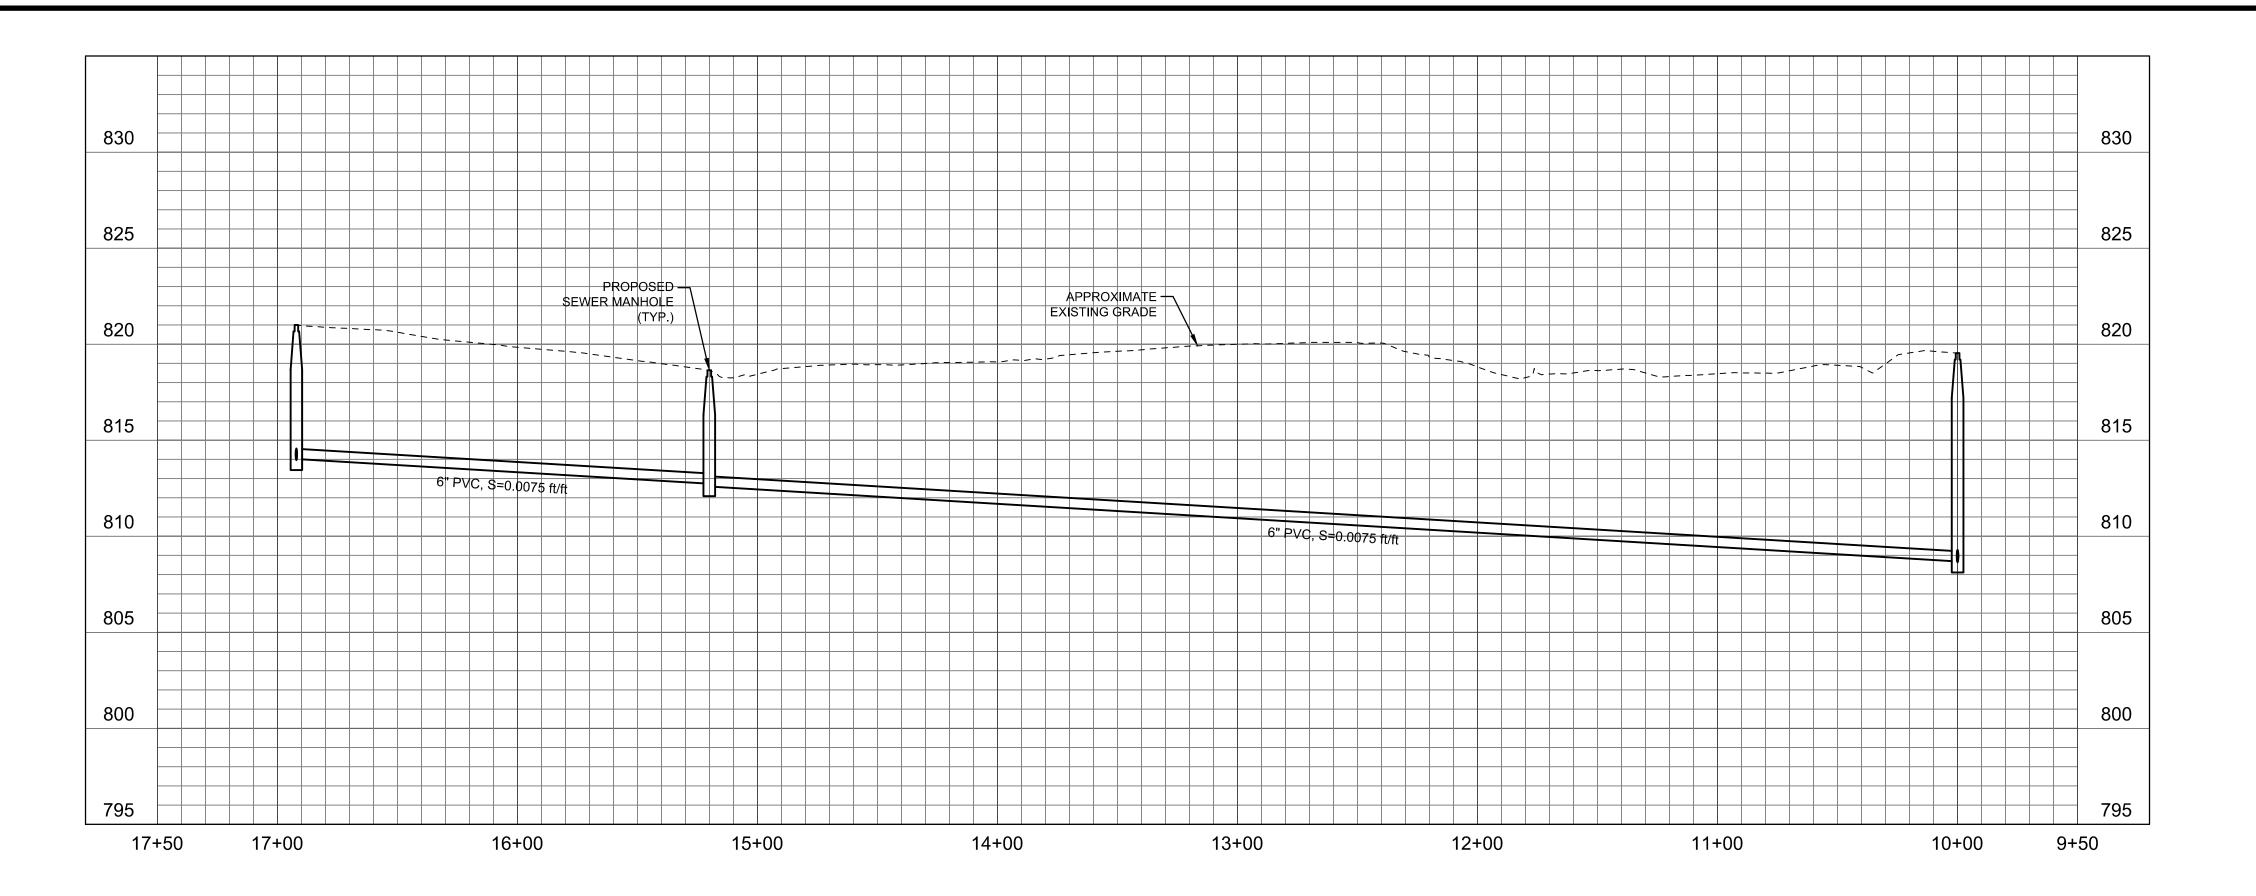

SCALE: HORIZ: 1" =40', VERT: 1"= 5'

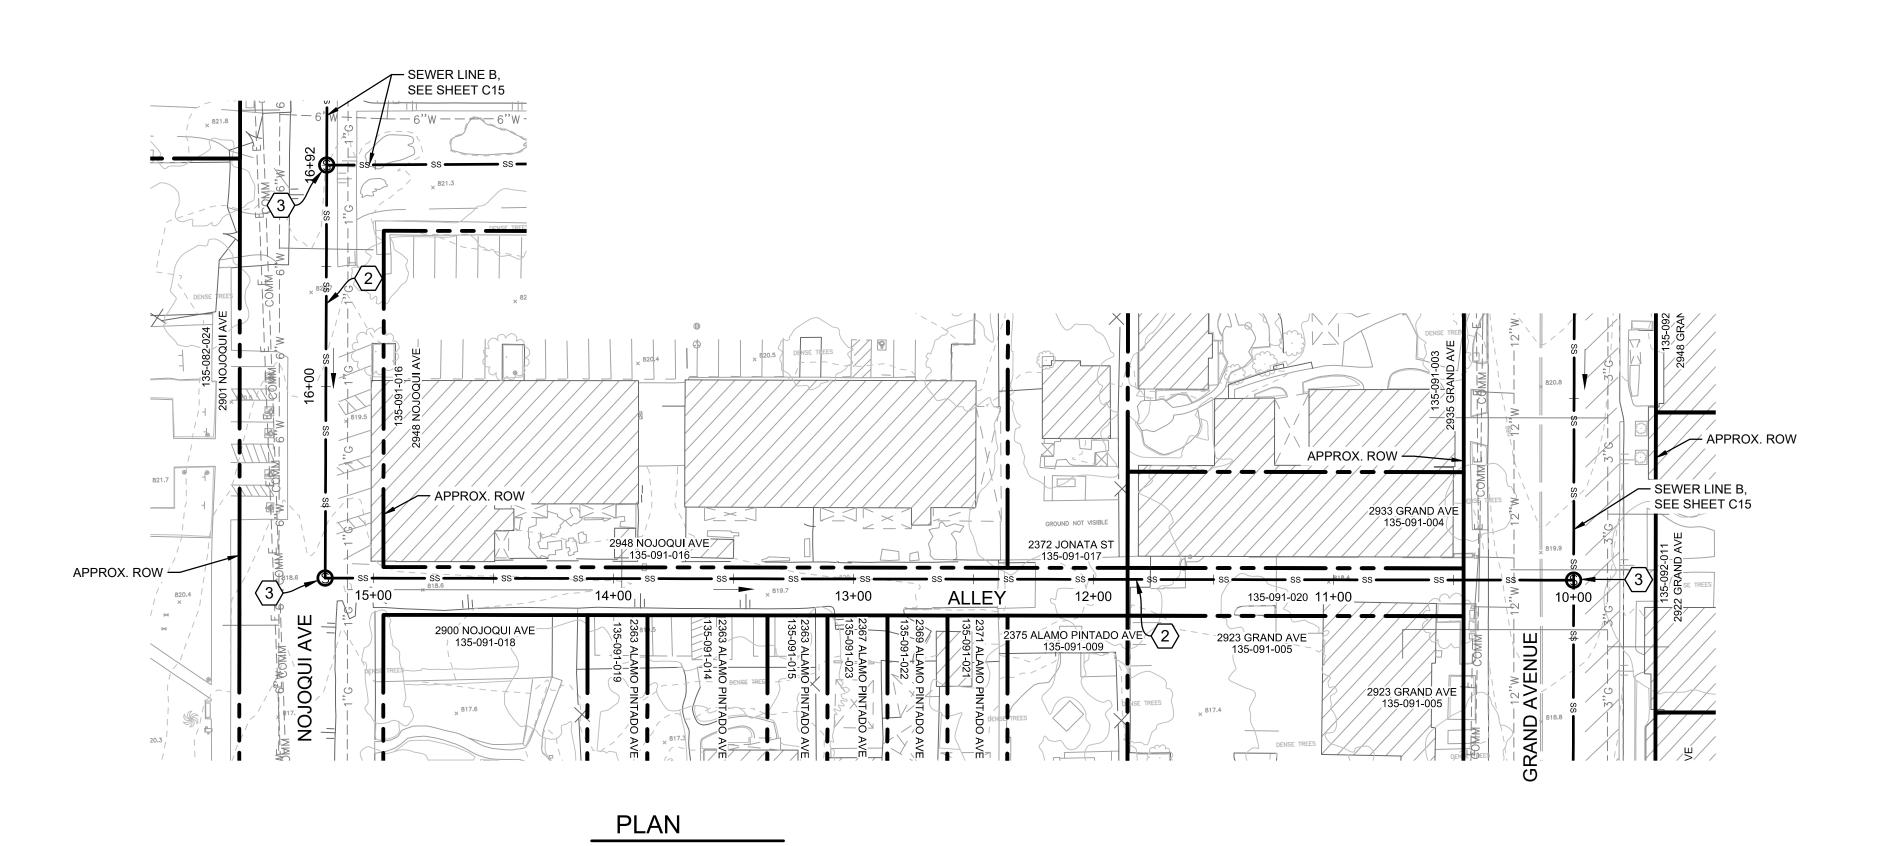

WARNING

1"=40'-0"

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
NO	DATE	REVISIONS	DATE:	06/28/2022



LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE TOT PLAN AND PROFILE STA 10+00 TO STA 16+92 NOJOQUI - ALLEY

**KEY MAP** 

**GENERAL SHEET NOTES** 

AND WERE NOT SURVEYED.

SHEET CONSTRUCTION NOTES

A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE

TO THE ATTENTION OF THE ENGINEER.

APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT

B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR

ARE SUBJECT TO CHANGE DURING FINAL DESIGN.

CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN

ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND

C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.

D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE

 $\langle$  1 angle CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.

(2) CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.

(4) CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.


(5) CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.


6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.


(3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.

PROJECT NO. 184031368 DWG NO. <u>C49</u>

SHT. 51 OF 54

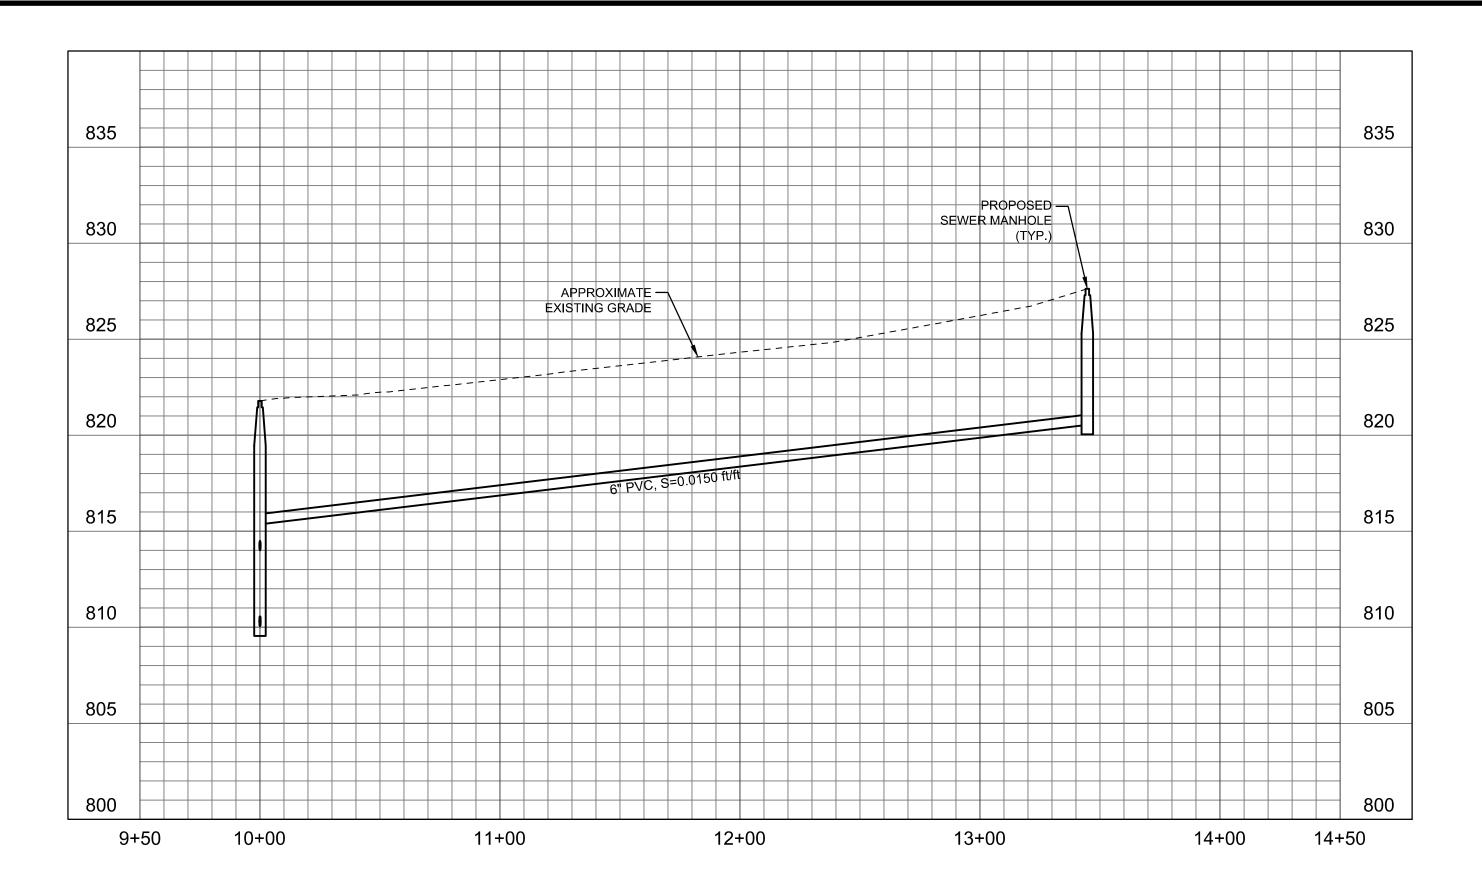

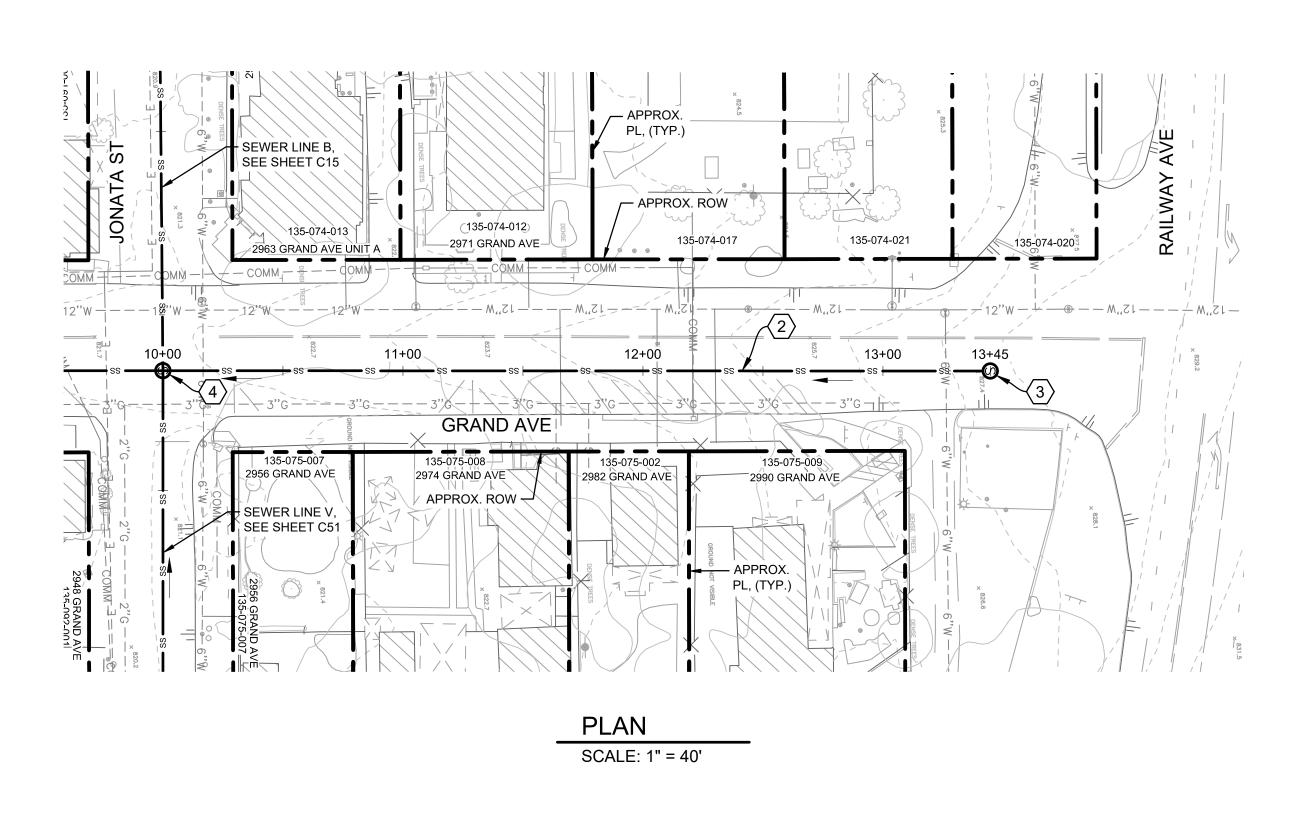

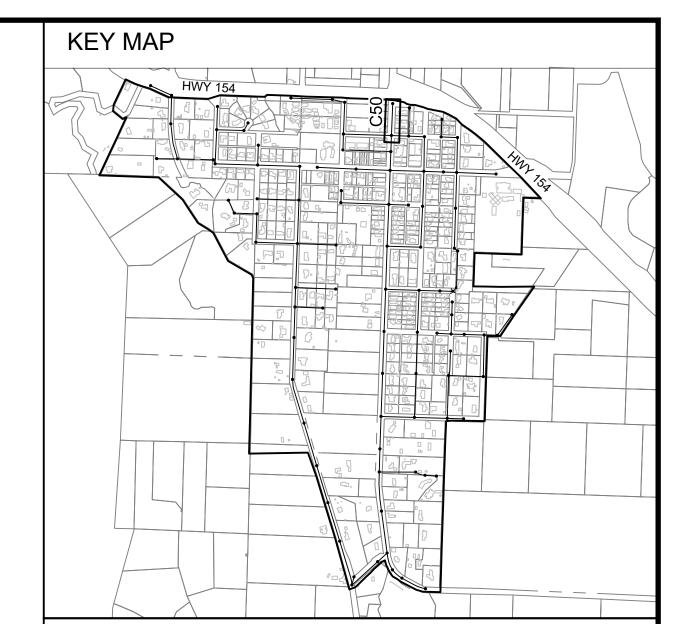

### GENERAL SHEET NOTES

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.

### SHEET CONSTRUCTION NOTES

- igg(1igg) CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\overline{\langle 2 \rangle}$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- 5 CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.



1"=40'-0"

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
NO.	DATE	REVISIONS	DATE:	06/28/2022

WARNING

0 ½ 1

IF THIS BAR DOES
NOT MEASURE 1"
THEN DRAWING IS
NOT TO SCALE

WARNING

Stantec

LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT


SEWER LINE U.OT
PLAN AND PROFILE
STA 10+00 TO STA 13+45
GRAND AVENUE


PROJECT NO.


184031368

DWG NO. C50

DWG NO. <u>C50</u> 3.50 NIME SHT. <u>52</u> OF <u>54</u>

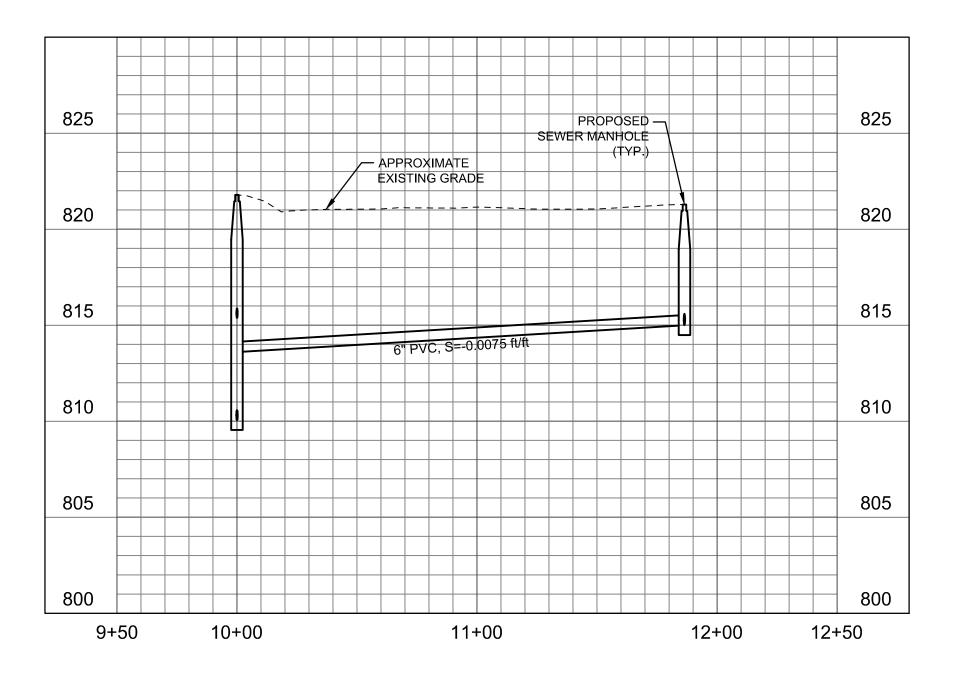

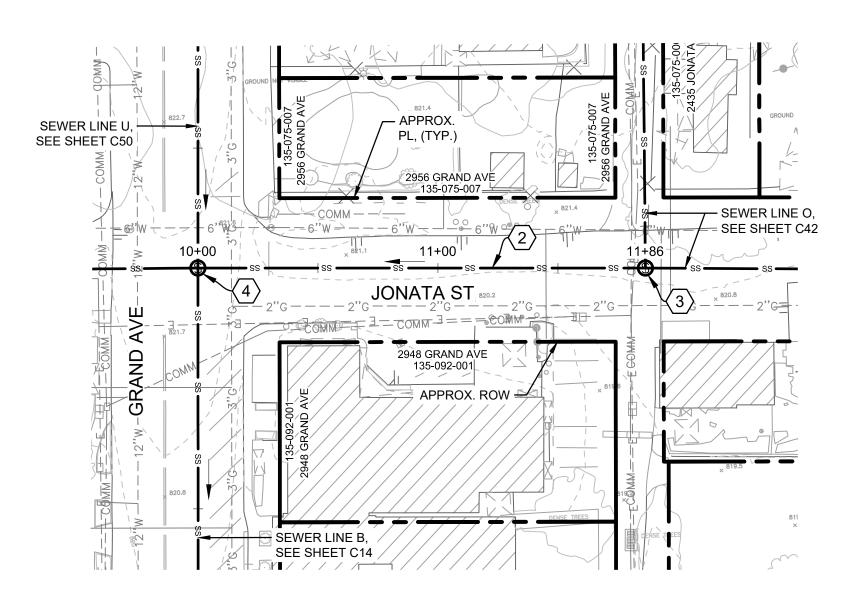

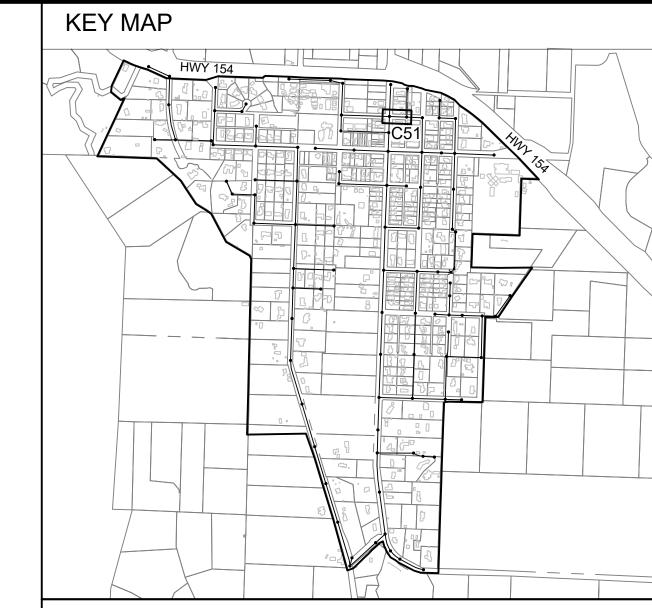

### **GENERAL SHEET NOTES**

- A. SUBSURFACE UTILITIES SHOWN ON THIS PLAN ARE APPROXIMATE AND ARE SHOWN BASED ON THE BEST DATA AVAILABLE AT THE TIME OF DESIGN. ALL SUBSURFACE UTILITIES SHALL BE LOCATED BY POTHOLING PRIOR TO CONSTRUCTION. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- B. THIS PLAN IS PRELIMINARY AND SHALL NOT BE USED FOR CONSTRUCTION. ALIGNMENTS AND ELEVATIONS SHOWN ON THIS PLAN ARE FOR PLANNING PURPOSES ONLY AND ARE SUBJECT TO CHANGE DURING FINAL DESIGN.
- C. THE MINIMUM COVER FOR THE SEWER MAIN IS 5 FEET AND THE MINIMUM SLOPE IS 0.5%. THE DEPTH OF THE SEWER MAIN IS BASED ON MAINTAINING 4 FEET OF COVER AT THE PROPERTY LINE FOR THE SEWER LATERAL AT 2% SLOPE.
- D. RIGHT OF WAY AND PROPERTY LINES ARE APPROXIMATE AND WERE NOT SURVEYED.


### SHEET CONSTRUCTION NOTES

- 1 CONSTRUCT 8-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- $\langle 2 \rangle$  CONSTRUCT 6-INCH DIAMETER PVC SDR 35 SEWER MAIN.
- (3) CONSTRUCT 4-FOOT DIAMETER SEWER MANHOLE.
- 4 CONSTRUCT 4-FOOT DIAMETER SEWER DROP MANHOLE.
- 5 CONSTRUCT 10-INCH DIAMETER PVC SD35 SEWER MAIN.
- 6 CONSTRUCT LIFT STATION WITH 5-FOOT DIAMETER WET WELL AND DUPLEX PUMPS.

40 20 0 1"=40'-0"

30% SUBMITTAL

			DESIGNED BY:	CEP/ JTZ
			DRAFTED BY:	VH
			CHECKED BY:	ALG/ GA
ΖО.	DATE	REVISIONS	DATE:	06/28/2022





LOS OLIVOS COMMUNITY SERVICES DISTRICT PO Box 345, Los Olivos CA 93441

LOS OLIVOS CSD SEPTIC TO SEWER PROJECT

SEWER LINE VOT
PLAN AND PROFILE
STA 10+00 FO STA 11+86
JONATA STREET

PROJECT NO. 184031368

DWG NO. <u>C51</u> SHT. <u>53</u> OF <u>54</u>

### NOTE: THE SITE IS BASED ON THE CLOACINA MBR PACKAGE PROVIDED BY THE DISTRICT. 8-FT WIDE LANDSCAPE BUFFER SECONDARY GATE PERIMETER ACCESS ROAD OPENING (DEPENDENT ON SITE CONDITIONS) LIQUID SLUDGE HOLDING TANK WELL #1 LIQUID SLUDGE ODOR HOLDING TANK CONTROL, PROCESS PUMPS, SCREENS, GRIT REMOVAL, BLOWERS BLOWERS RO CONCENTRATE AND HOLDING TANK BLOWERS TO 1 INFLUENT 110' LIFT STATION ALTERNATIVE & PUMPS & SCREENINGS WASTE \ EQUALIZATION / W TANK WITH ODOR/ \ CONTROL / HEADWORKS AND PACKAGED SECONDARY TREATMENT BUILDING 24' GATE OPENING 20' -EFFLUENT STORAGE TANK PG&E METER AND TRANSFORMER OPERATOR OFFICE RO CIP 10' **PERMEATE** $\circ$ 10' ELECTRICAL/CONTROLS PARKING AREA $\circ$ TREATMENT INJECTION 10'CHEMICAL STORAGE **BACKUP** 10**'** FUTURE / EFFLUEN STORAGE TANK WELL #2 EFFLUENT PUMPS **GENERATOR** ADVANCED TREATMENT BUILDING OR ENCLOSURE PERIMETER ACCESS ROAD 8-FT WIDE LANDSCAPE BUFFER PLAN 1" = 15' SITE PLAN NOT WASTEWATER TREATMENT PLANT PRE-CONSTRUCTOR 30% SUBMITTAL PROJECT NO. CEP/ GA WARNING LOS OLIVOS COMMUNITY SERVICES DISTRICT DESIGNED BY: 184031368 PO Box 345, Los Olivos CA 93441 DRAFTED BY: Stantec IF THIS BAR DOES NOT MEASURE 1" THEN DRAWING IS NOT TO SCALE DWG NO. T1 CHECKED BY: LOS OLIVOS CSD SEPTIC TO SEWER PROJECT SHT. <u>54</u> OF <u>54</u> REVISIONS NO. DATE